



Data sheet

2026-06-10

Faro V

Emphasise the height of any interior.



- ✓ **Elegant contoured design**
- ✓ **Perfect solution for limited wall space**
- ✓ **Middle connection radiator**
- ✓ **Rotatable for connection from above**
- ✓ **High-quality stainless steel towel rail**

The style of **Faro V** is emphasised by a finely profiled front panel and rounded side panels. Like tall interior furnishings, this designer radiator is not only intended to create a sense of height, it is also a powerful heat source in areas where wall space is at a premium. The standard colour is RAL 9016 white, but many other colours and finishes are available on request. For increased functionality in the bathroom and kitchen, a stainless steel towel bar is available as an accessory. Complete with brackets including set of screws and dowels with mounting instructions, side covers with installation clips, 3 brass blanking plugs and air-vent.



Area of application

Faro V is ideal for residential and commercial spaces where wall space is limited. It is a powerful heat source with factory-fitted steel plates, side panels, and top grill. Suitable for 2-pipe pumped indirect heating systems with 6 x ½" BSP connections.

Sizing

Use a Heat Demand Calculator to determine the required heat output from the Faro V range.

Usage

Air vent and plug packs are included in the packaging. Thermostatic Radiator Valves can be installed to control room temperature. The radiator should be securely fixed to the wall using the included brackets, screws, and dowels. For increased functionality, a stainless steel towel bar is available.

AMA Text

Designer radiator, Faro V, is a vertical radiator with a finely vertically profiled front surface and slightly curved side covers. Available as type 21 with two heating panels and one layer of convection fins or as type 22 with two heating panels and two layers of convection fins. It's a perfect solution for areas where wall space is limited, ideal for 2-pipe pumped indirect domestic and commercial heating applications with 6 x ½" BSP connections. The radiator comes in a flat steel plate design with integrated middle connections, and a variety of sizes and colours are available. Complete with air vent and plug packs, it can be paired with thermostatic radiator valves for temperature control. The package also includes brackets, screws, and dowels for secure wall installation. Accessories such as a stainless steel towel bar enhance its functionality in bathrooms and kitchens.



Specifications

| PROPERTIES | UNIT | VALUES |
|---|------|-----------------|
| ETIM Class | | EC011022 |
| Material | | Steel |
| Type | | 21, 22 |
| Surface structure | | Flat smooth |
| Max working pressure | bar | 10 |
| Number of standard connections | | 4 |
| Heat output according to recognized EN 442 laboratory | | Yes |
| Max. Operating Temperature | °C | 110 |
| Standard color | | Yes |
| Color | | White |
| RAL number | | 9016 |
| Grill/Cover plate | | Yes |
| Grill/Cover plate | | Yes |
| Gloss value | | Glossy |
| Thread dimension (inch) | | 1/2 inch |
| Thread connection | | Internal thread |
| With single-point connection | | Yes |
| With air vent connection | | Yes |
| With air valve/vent | | Yes |
| With drain option | | Yes |




Documents

| DOCUMENTS | DOCUMENT TYPE | LINK |
|---|---------------|---|
| Colour options | Brochure | https://asset.productmarketingcloud.com/api/assetstorage/3577_559d73e5-f4c7-4bc1-a5d1-5d81098413e7 |
| Myson Complete Solutions - Full Brochure | Brochure | https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b |
| Myson Premium Panel & Designer Radiators | Brochure | https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fab3-51e3-4ceb-9b37-139ffed451d7 |
| Range brochure | Brochure | https://asset.productmarketingcloud.com/api/assetstorage/3577_5a942de7-8bcb-4179-a4fc-d890b5c692f3 |
| Product Warranty | Warranty | https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab |
| Vertical Radiator Installation Instructions | Installation | https://asset.productmarketingcloud.com/api/assetstorage/3577_ad715b96-fe81-40af-9d8a-5cea5c751f |
| Installation Manual Faro V | TechDia | https://asset.productmarketingcloud.com/api/assetstorage/3577_6a68539c-c460-4642-8d8b-056f68b79286 |





Resources

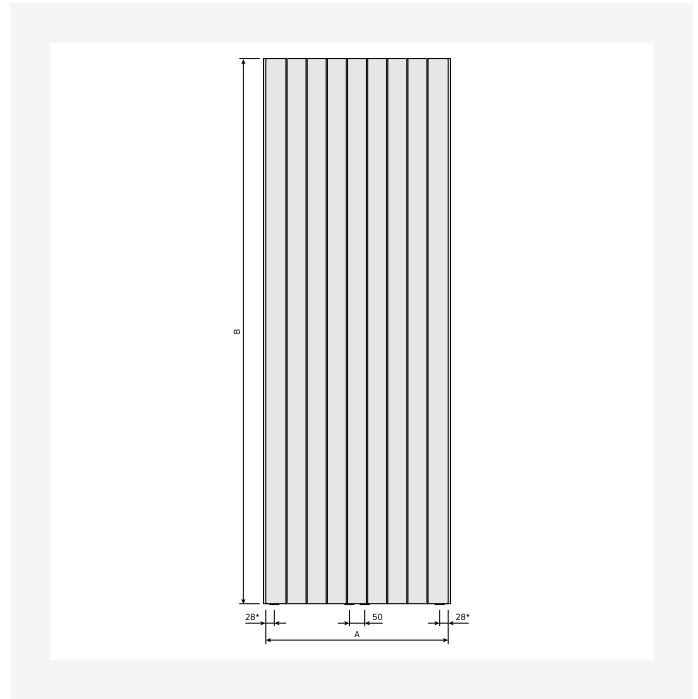

ProductImage - Vertical design radiator Faro V, FAV, 30 degrees, white.

DimensionalDrawing - New_Faro V front view

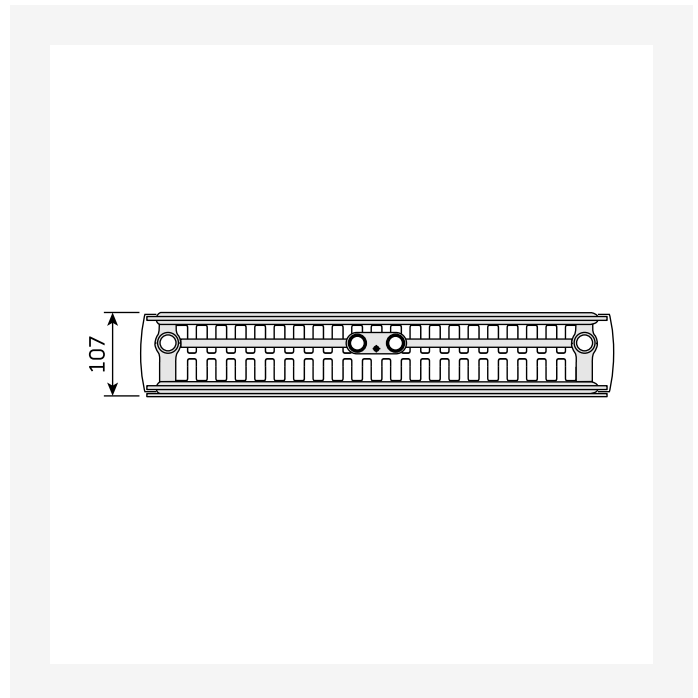
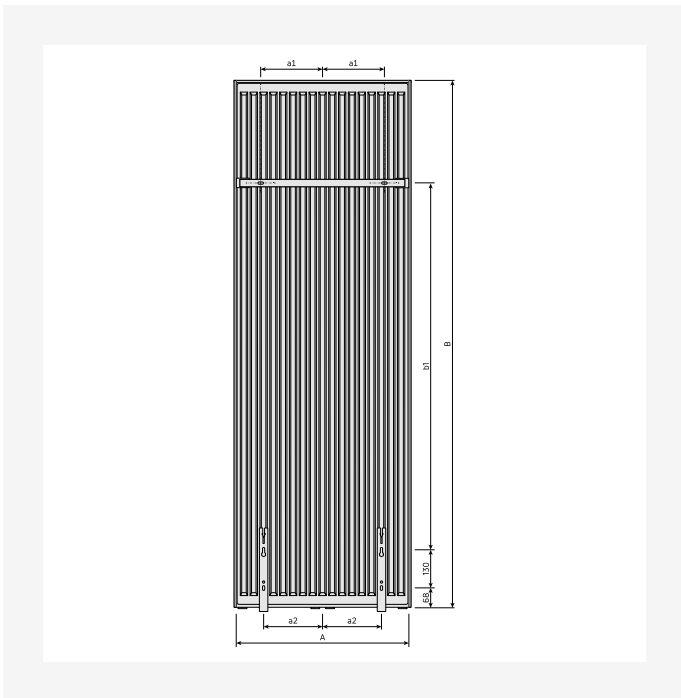


DimensionalDrawing - New_Kos V-Faro V rear view

DimensionalDrawing - New_Kos V-Faro V top view





Resources

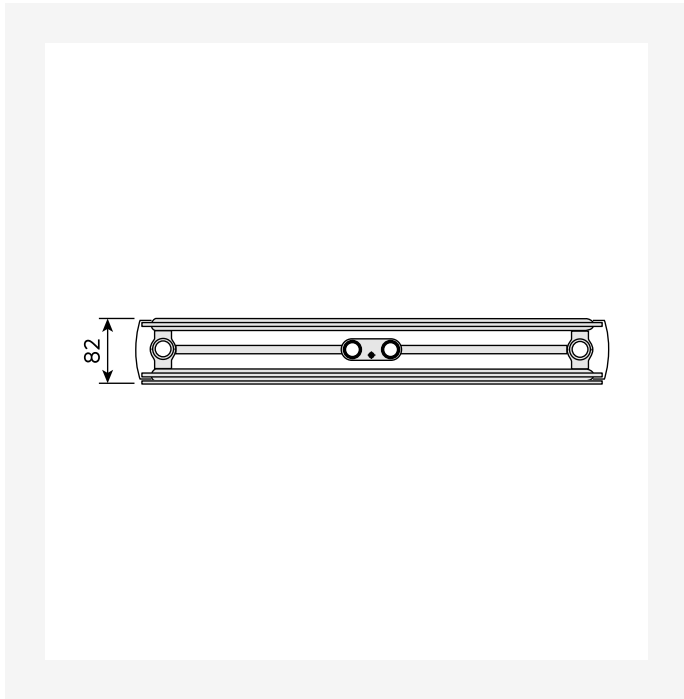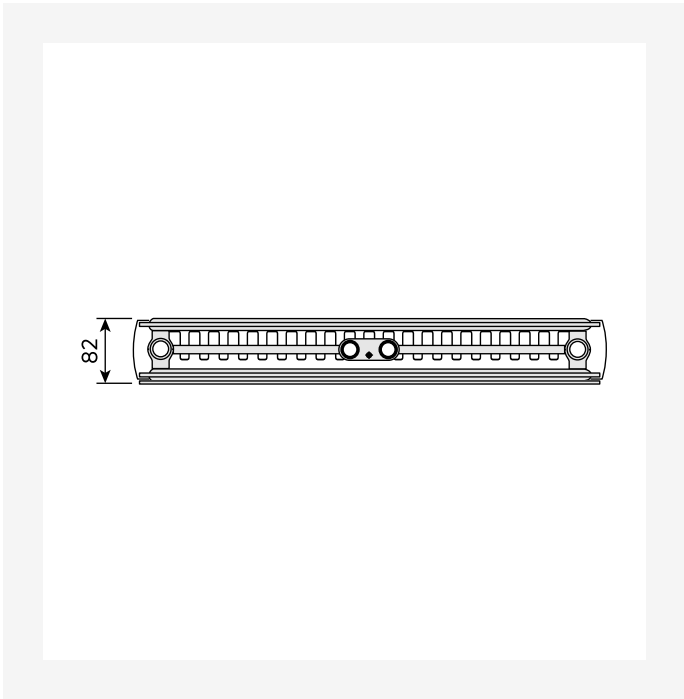

DimensionalDrawing - New_Kos V-Faro V top view

DimensionalDrawing - New_Kos V-Faro V top view

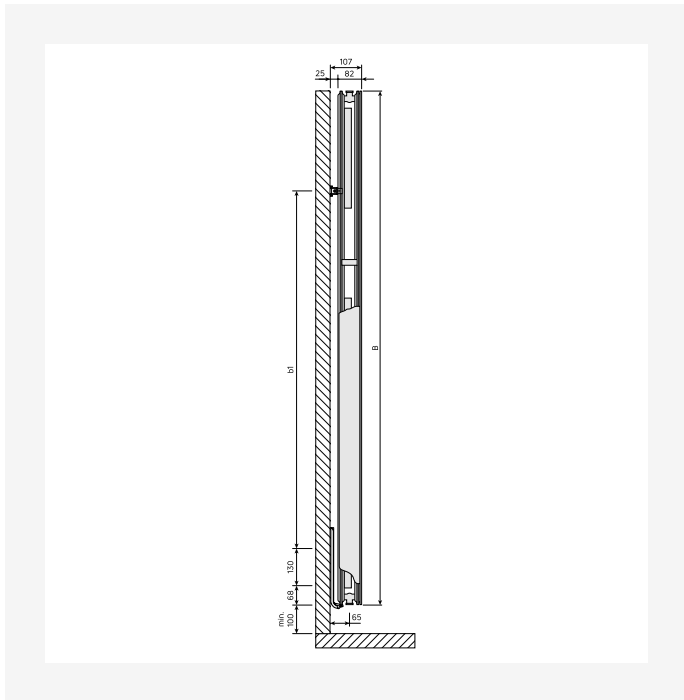
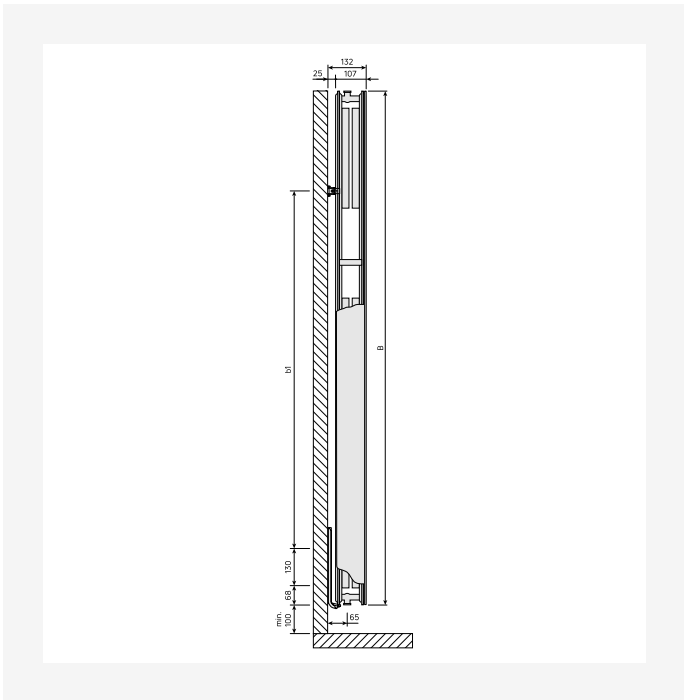


DimensionalDrawing - New_Kos V-Faro V side view

DimensionalDrawing - New_Kos V-Faro V side view





Resources

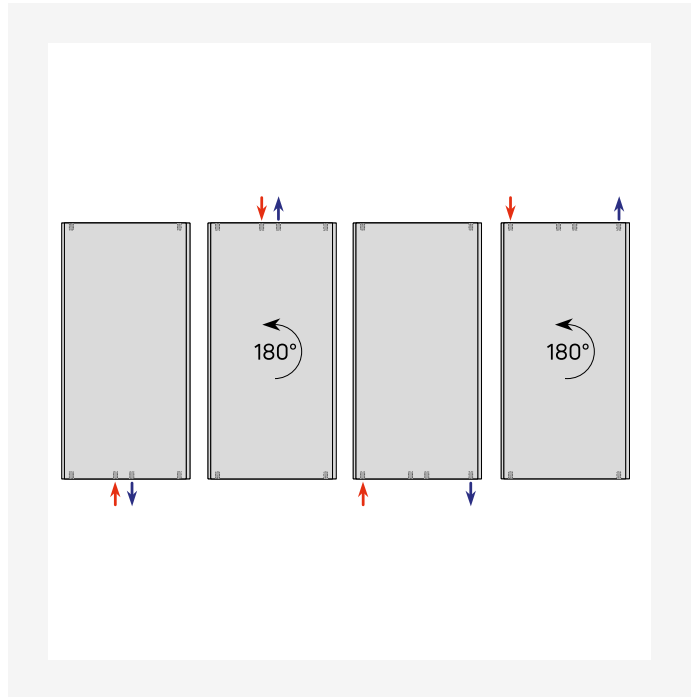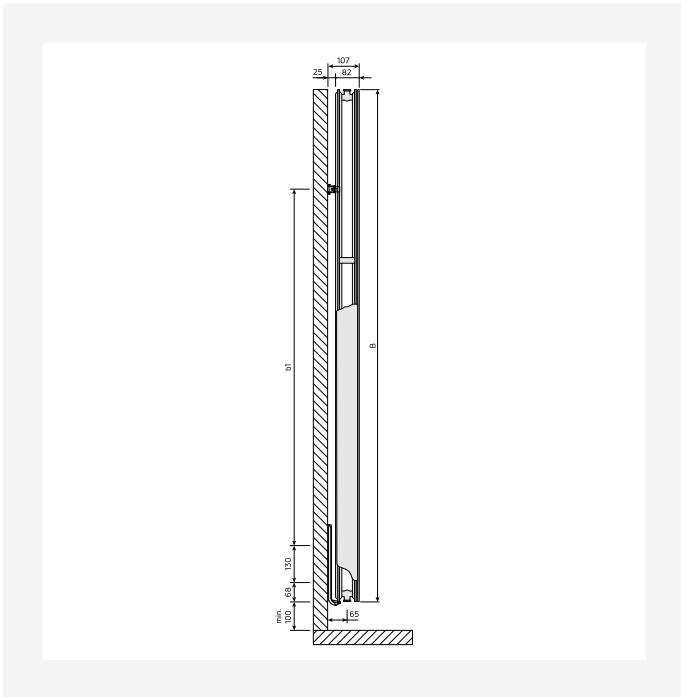

DimensionalDrawing - New_Kos V-Faro V side view

DimensionalDrawing - Verticals connection options

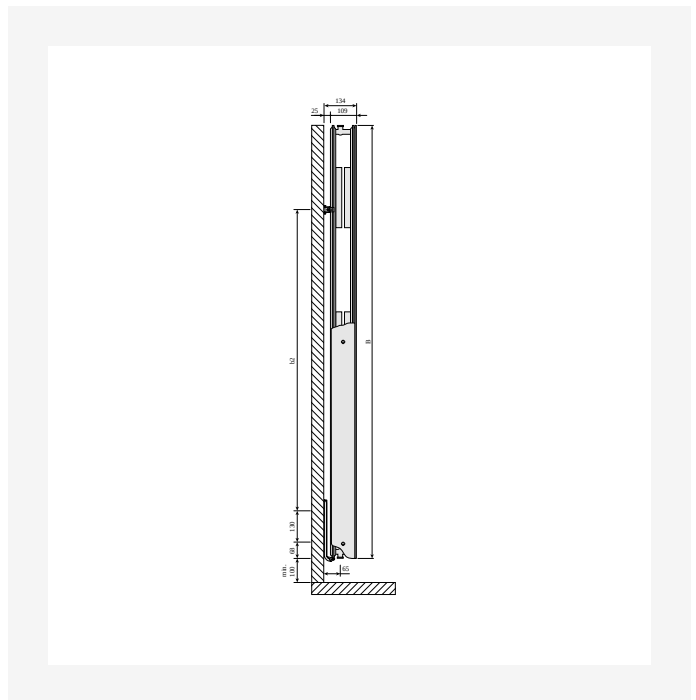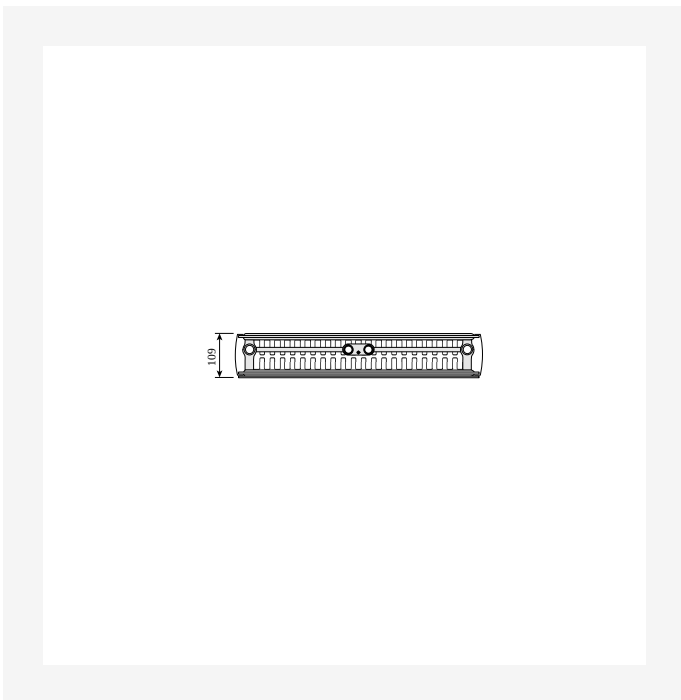


DimensionalDrawing - Kos V and Faro V, type 22, top view


DimensionalDrawing - Kos V and Faro V type 22, side view



Resources

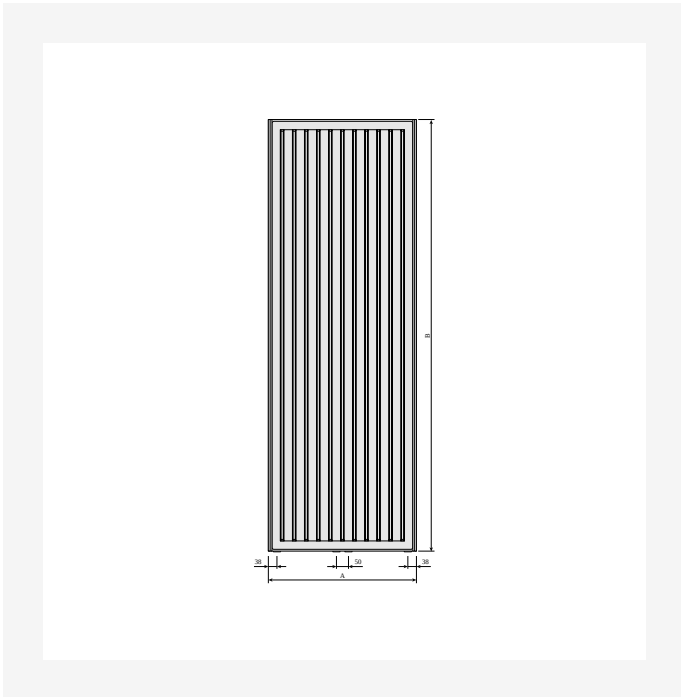

DimensionalDrawing - Kos V and Faro V back view

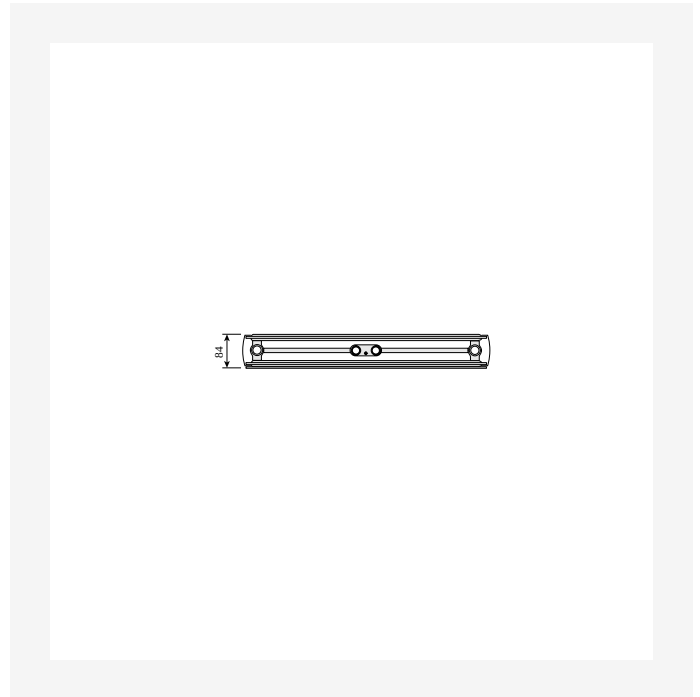

DimensionalDrawing - Kos V and Faro V type 20, top view

| KOS V (mm) | | | | |
|------------|-------------|-------------|-------------|-------------|
| B | 1500 | 1800 | 1950 | 2100 |
| b1 | 1150 | 1450 | 1600 | 1750 |
| b2 | 952 | 1252 | 1402 | 1552 |

DimensionalDrawing - Kos V, Faro V - table B

| KOS V (mm) | | | | |
|------------|------------|------------|------------|------------|
| A | 320 | 470 | 620 | 770 |
| a1 | 60 | 135 | 210 | 285 |
| a2 | 75 | 125 | 200 | 250 |

DimensionalDrawing - Kos V, Faro V - table A



Related products



Plan Plus Compact



Air Vent Key (Spare)



Valve Set Vertical



1800

| HEIGHT 1800 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|--------------|--------------------|--------------------|------------|------------|-------------|
| Type 21 | | | | | | | | |
| 300 | 82 | | FAR180PPX30G | 1689 | 3258 | 4.8 | 1.29 | 31.7 |
| 450 | 82 | | FAR180PPX45G | 2443 | 4739 | 7.2 | 1.30 | 45.8 |
| 600 | 82 | | FAR180PPX60G | 3173 | 6183 | 9.7 | 1.31 | 59.9 |
| 750 | 82 | | FAR180PPX75G | 3886 | 7602 | 12.1 | 1.31 | 74.0 |
| Type 22 | | | | | | | | |
| 300 | 107 | | FAR180PPD30G | 2020 | 3917 | 4.8 | 1.30 | 35.1 |
| 450 | 107 | | FAR180PPD45G | 2979 | 5794 | 7.3 | 1.30 | 50.6 |
| 600 | 107 | | FAR180PPD60G | 3920 | 7650 | 9.7 | 1.31 | 66.1 |
| 750 | 107 | | FAR180PPD75G | 4848 | 9489 | 12.2 | 1.31 | 81.5 |



1950

| HEIGHT 1950 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|--------------|--------------------|--------------------|------------|------------|-------------|
| Type 21 | | | | | | | | |
| | 300 | 82 | FAR195PPX30G | 1778 | 3439 | 5.2 | 1.29 | 34.1 |
| | 450 | 82 | FAR195PPX45G | 2579 | 5002 | 7.8 | 1.30 | 49.3 |
| | 600 | 82 | FAR195PPX60G | 3361 | 6527 | 10.4 | 1.30 | 64.4 |
| | 750 | 82 | FAR195PPX75G | 4118 | 8022 | 13.0 | 1.31 | 79.6 |
| Type 22 | | | | | | | | |
| | 300 | 107 | FAR195PPD30G | 2129 | 4122 | 5.3 | 1.29 | 37.3 |
| | 450 | 107 | FAR195PPD45G | 3142 | 6101 | 7.8 | 1.30 | 53.8 |
| | 600 | 107 | FAR195PPD60G | 4139 | 8052 | 10.4 | 1.30 | 70.3 |
| | 750 | 107 | FAR195PPD75G | 5118 | 9990 | 13.1 | 1.31 | 86.8 |