



## Data sheet

2026-09-20

# Plan Compact

Myson Plan Compact is a panel radiator with flat front



- ✓ Refined finish
- ✓ Optimal heat distribution
- ✓ Decorative grille & side panels
- ✓ Vertical models available
- ✓ Child-proof attachment

The Myson radiator range extends beyond the traditional steel panel radiator with stylish contemporary radiators in the Myson Plan and Plan Plus ranges - in both horizontal and vertical models. Myson **Plan Compact** offers a minimalist feel, combining good looks with leading performance. The sleek flat front panel design of Myson Plan is complimented by pre-assembled side panels, decorative top grille and child-proof attachment.



### Area of application

Plan Compact is suitable for both domestic and commercial heating applications. It offers a sleek, flat steel plate design, side panels, and top grilles. Ideal for 2-pipe pumped indirect systems, it matches various dimensions for easy replacements.

### Sizing

Use a Heat Loss Calculator to determine the required heat output from the Plan Compact range. It is available in Types 11, 21, 22, and 33.

### Usage

Plan Compact radiators come with air vent and plug packs included. Install Thermostatic Radiator Valves for

temperature control. Suitable for 2-pipe indirect systems, ensure connections are secure and follow installation guidelines.

### AMA Text

Plan Compact radiators are high-quality panel radiators featuring a flat front panel, side panels, and a top grille. Manufactured from steel and available in Types 11, 21, 22, and 33, they provide optimal heat distribution. Suitable for 2-pipe pumped indirect systems with 4 x ½" BSP connections. Tested to a pressure of 10.5 bar and operating temperature up to 100°C. Available in various heights and lengths, ensuring easy installation and replacement. Ideal for both domestic and commercial heating applications. Comes with a 10-year guarantee against manufacturing defects.



# Specifications

| PROPERTIES                                            | UNIT | VALUES                               |
|-------------------------------------------------------|------|--------------------------------------|
| ETIM Class                                            |      | EC011022                             |
| Material                                              |      | Steel                                |
| Type                                                  |      | 11, 21, 22, 33                       |
| Surface structure                                     |      | Flat smooth                          |
| Max working pressure                                  | bar  | 10                                   |
| Number of standard connections                        |      | 4                                    |
| Heat output according to recognized EN 442 laboratory |      | Yes                                  |
| Max. Operating Temperature                            | °C   | 110                                  |
| Standard color                                        |      | Yes                                  |
| Color                                                 |      | White                                |
| RAL number                                            |      | 8948,8893,8982,8983,8949,8894,8895,8 |
| Grill/Cover plate                                     |      | Yes                                  |
| Grill/Cover plate                                     |      | Yes                                  |
| Gloss value                                           |      | Glossy                               |
| Thread dimension (inch)                               |      | 1/2 inch                             |
| Thread connection                                     |      | Internal thread                      |
| With single-point connection                          |      | Yes                                  |
| With air vent connection                              |      | Yes                                  |
| With air valve/vent                                   |      | Yes                                  |
| With drain option                                     |      | Yes                                  |



# Documents

| DOCUMENTS                                | DOCUMENT TYPE | LINK                                                                                                                                                                                                                |
|------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Myson Complete Solutions - Full Brochure | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b">https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b</a> |
| Myson Premium Panel & Designer Radiators | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fabcd51e3-4ceb-9b37-139ffed451d7">https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fabcd51e3-4ceb-9b37-139ffed451d7</a> |
| Product Warranty                         | Warranty      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab">https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab</a> |
| Installation Instruction Compact Purmo   | TechDia       | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_2da398bb-5820-4a58-af2d-62333aa4e65e">https://asset.productmarketingcloud.com/api/assetstorage/3577_2da398bb-5820-4a58-af2d-62333aa4e65e</a> |




# Resources




ProductImage - Plan Compact

| PLAN COMPACT (mm) |      |      |                   |      |
|-------------------|------|------|-------------------|------|
|                   | FC11 |      | FC21s, FC22, FC33 |      |
| A                 | a1   | a2   | a1                | a2   |
| 400-1600          | 117  | -    | 133               | -    |
| 1800              | 117  | 917  | 133               | 900  |
| 2000              | 117  | 1017 | 133               | 1000 |
| 2300              | 117  | 1150 | 133               | 1167 |
| 2600              | 117  | 1317 | 133               | 1300 |
| 3000              | 117  | 1517 | 133               | 1500 |

DimensionalDrawing - Plan Compact - table

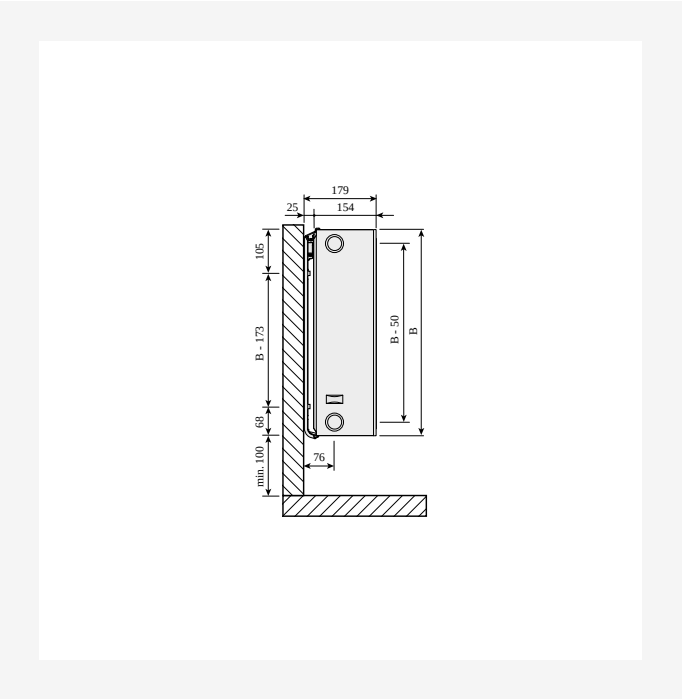


DimensionalDrawing - Plan Compact, type 33. side view with Monclac wall brackets

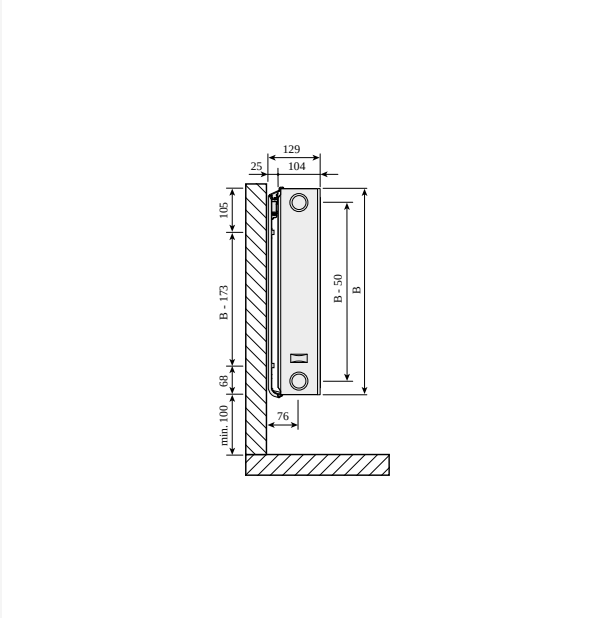


DimensionalDrawing - Plan Compact, type 22. side view with Monclac wall brackets



# Resources




DimensionalDrawing - Plan Compact, type 21, side view with Monclac wall brackets



DimensionalDrawing - Plan Compact, type 11, side view with Monclac wall brackets



DimensionalDrawing - Plan Compact, Ramo Compact type 33, top view




DimensionalDrawing - Plan Compact, Ramo Compact type 33, SV SSMS



# Resources




DimensionalDrawing - Plan Compact, Ramo Compact type 22, top view



DimensionalDrawing - Plan Compact, Ramo Compact type 22, side view with SSMS wall brackets.



DimensionalDrawing - Plan Compact, Ramo Compact type 21s, top view




DimensionalDrawing - Plan Compact, Ramo Compact type 21s, side view with SSMS wall brackets




# Resources




DimensionalDrawing - Plan Compact, Ramo Compact type 11, top view



DimensionalDrawing - Plan Compact, Ramo Compact type 11, side view with SSMS wall brackets

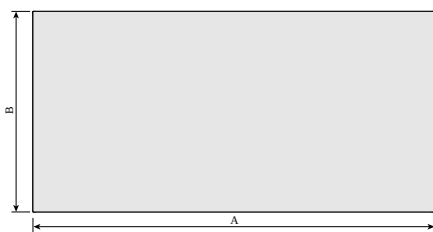

DimensionalDrawing - Plan Compact front view

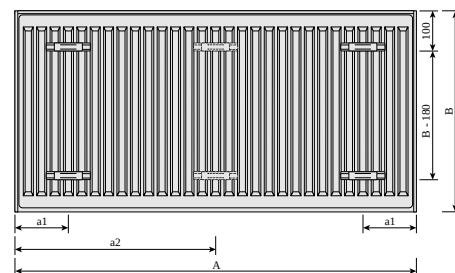

DimensionalDrawing - Compact, back view



## Related products



Matchmate



Matchmaster



Matchmaster PF90



Decorative TRV Valves



Decorative Modern Valves



Decorative TRV Valve Pack



Decorative Slimline Valves



Decorative Traditional Valves



Myson Plus Manual Valves



Myson Plus Radiator Packs



Myson Plus TRV Valves



TRV2



## Related products



TRV2 Radiator Packs



300

| HEIGHT 300 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| Type 11       |        |       |          |                    |                    |            |            |             |
|               | 600    | 63    | 30PS60G  | 563                | 1082               | 1.0        | 1.28       | 7.5         |
|               | 1000   | 63    | 30PS100G | 938                | 1805               | 2.0        | 1.28       | 11.8        |
|               | 1400   | 63    | 30PS140G | 1314               | 2528               | 2.0        | 1.28       | 15.9        |
|               | 2000   | 63    | 30PS200G | 1877               | 3610               | 3.0        | 1.28       | 22.2        |
| Type 22       |        |       |          |                    |                    |            |            |             |
|               | 600    | 104   | 30PD60G  | 986                | 1918               | 2.0        | 1.30       | 11.5        |
|               | 1000   | 104   | 30PD100G | 1648               | 3197               | 3.0        | 1.30       | 18.1        |
|               | 1400   | 104   | 30PD140G | 2303               | 4477               | 4.0        | 1.30       | 24.8        |
|               | 2000   | 104   | 30PD200G | 3293               | 6394               | 6.0        | 1.30       | 34.9        |
| Type 33       |        |       |          |                    |                    |            |            |             |
|               | 600    | 154   | 30PT60G  | 1375               | 2689               | 3.0        | 1.32       | 16.0        |
|               | 1000   | 154   | 30PT100G | 2289               | 4483               | 5.0        | 1.32       | 25.4        |
|               | 1400   | 154   | 30PT140G | 3204               | 6278               | 7.0        | 1.32       | 34.9        |
|               | 2000   | 154   | 30PT200G | 4579               | 8967               | 10.0       | 1.32       | 49.5        |



400

| HEIGHT 400 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| Type 11       |        |       |          |                    |                    |            |            |             |
|               | 400    | 63    | 40PS40G  | 481                | 928                | 1.0        | 1.28       | 6.9         |
|               | 600    | 63    | 40PS60G  | 723                | 1392               | 1.0        | 1.28       | 10.1        |
|               | 800    | 63    | 40PS80G  | 966                | 1856               | 2.0        | 1.28       | 12.5        |
|               | 1000   | 63    | 40PS100G | 1204               | 2320               | 2.0        | 1.28       | 15.3        |
|               | 1200   | 63    | 40PS120G | 1447               | 2784               | 3.0        | 1.28       | 18.1        |
|               | 1400   | 63    | 40PS140G | 1686               | 3248               | 3.0        | 1.28       | 3.0         |
|               | 1600   | 63    | 40PS160G | 1928               | 3712               | 4.0        | 1.28       | 23.8        |
|               | 1800   | 63    | 40PS180G | 2170               | 4176               | 4.0        | 1.28       | 26.7        |
|               | 2000   | 63    | 40PS200G | 2409               | 4640               | 4.0        | 1.28       | 29.4        |
| Type 22       |        |       |          |                    |                    |            |            |             |
|               | 400    | 104   | 40PD40G  | 836                | 1634               | 2.0        | 1.31       | 1.5         |
|               | 600    | 104   | 40PD60G  | 1256               | 2453               | 3.0        | 1.31       | 15.2        |
|               | 800    | 104   | 40PD80G  | 1675               | 3269               | 3.0        | 1.31       | 19.5        |
|               | 1000   | 104   | 40PD100G | 2095               | 4088               | 4.0        | 1.31       | 24.2        |
|               | 1200   | 104   | 40PD120G | 2511               | 4906               | 5.0        | 1.31       | 28.5        |
|               | 1400   | 104   | 40PD140G | 2931               | 5722               | 6.0        | 1.31       | 33.4        |
|               | 1600   | 104   | 40PD160G | 3351               | 6541               | 7.0        | 1.31       | 37.5        |
|               | 1800   | 104   | 40PD180G | 3767               | 7356               | 8.0        | 1.31       | 42.5        |
|               | 2000   | 104   | 40PD200G | 4187               | 8175               | 8.0        | 1.31       | 46.5        |
| Type 33       |        |       |          |                    |                    |            |            |             |
|               | 400    | 154   | 40PT40G  | 1157               | 2272               | 3.0        | 1.32       | 14.7        |
|               | 600    | 154   | 40PT60G  | 1733               | 3412               | 4.0        | 1.32       | 21.2        |
|               | 800    | 154   | 40PT80G  | 2313               | 4548               | 5.0        | 1.32       | 27.5        |
|               | 1000   | 154   | 40PT100G | 2890               | 5684               | 6.0        | 1.32       | 33.9        |
|               | 1200   | 154   | 40PT120G | 3467               | 6821               | 8.0        | 1.32       | 4.2         |



# 400

| HEIGHT 400 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|               | 1400   | 154   | 4OPT140G | 4047               | 7957               | 9.0        | 1.32       | 46.6        |
|               | 1600   | 154   | 4OPT160G | 4623               | 9096               | 10.0       | 1.32       | 53.7        |
|               | 1800   | 154   | 4OPT180G | 5200               | 10233              | 11.0       | 1.32       | 59.4        |
|               | 2000   | 154   | 4OPT200G | 5780               | 11369              | 13.0       | 1.32       | 65.8        |



500

| HEIGHT 500 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| Type 11       |        |       |          |                    |                    |            |            |             |
|               | 400    | 63    | 50PS40G  | 583                | 1123               | 1.0        | 1.28       | 8.2         |
|               | 600    | 63    | 50PS60G  | 873                | 1686               | 2.0        | 1.28       | 11.8        |
|               | 800    | 63    | 50PS80G  | 1167               | 2245               | 2.0        | 1.28       | 15.4        |
|               | 1000   | 63    | 50PS100G | 1457               | 2808               | 3.0        | 1.28       | 19.2        |
|               | 1200   | 63    | 50PS120G | 1750               | 3371               | 3.0        | 1.28       | 22.6        |
|               | 1400   | 63    | 50PS140G | 2040               | 3931               | 4.0        | 1.28       | 26.2        |
|               | 1600   | 63    | 50PS160G | 2334               | 4494               | 5.0        | 1.28       | 29.8        |
|               | 1800   | 63    | 50PS180G | 2624               | 5053               | 5.0        | 1.28       | 33.4        |
|               | 2000   | 63    | 50PS200G | 2917               | 5616               | 6.0        | 1.28       | 37.8        |
| Type 21       |        |       |          |                    |                    |            |            |             |
|               | 400    | 72    | 50PX40G  | 785                | 1518               | 2.0        | 1.29       | 11.3        |
|               | 600    | 72    | 50PX60G  | 1177               | 2279               | 3.0        | 1.29       | 16.4        |
|               | 800    | 72    | 50PX80G  | 1573               | 3037               | 4.0        | 1.29       | 21.3        |
|               | 1000   | 72    | 50PX100G | 1965               | 3798               | 5.0        | 1.29       | 26.4        |
|               | 1200   | 72    | 50PX120G | 2358               | 4558               | 6.0        | 1.29       | 31.4        |
|               | 1400   | 72    | 50PX140G | 2750               | 5316               | 7.0        | 1.29       | 36.4        |
|               | 1600   | 72    | 50PX160G | 3142               | 6077               | 8.0        | 1.29       | 41.4        |
|               | 1800   | 72    | 50PX180G | 3535               | 6834               | 9.0        | 1.29       | 46.4        |
|               | 2000   | 72    | 50PX200G | 3927               | 7595               | 10.0       | 1.29       | 51.4        |
| Type 22       |        |       |          |                    |                    |            |            |             |
|               | 400    | 104   | 50PD40G  | 1003               | 1972               | 2.0        | 1.32       | 12.9        |
|               | 600    | 104   | 50PD60G  | 1508               | 2955               | 3.0        | 1.32       | 18.6        |
|               | 800    | 104   | 50PD80G  | 2010               | 3941               | 4.0        | 1.32       | 24.2        |
|               | 1000   | 104   | 50PD100G | 2511               | 4927               | 5.0        | 1.32       | 29.9        |
|               | 1200   | 104   | 50PD120G | 3013               | 5913               | 6.0        | 1.32       | 35.5        |



## 500

| HEIGHT 500 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|               | 1400   | 104   | 50PD140G | 3514               | 6899               | 7.0        | 1.32       | 41.2        |
|               | 1600   | 104   | 50PD160G | 4016               | 7882               | 8.0        | 1.32       | 46.8        |
|               | 1800   | 104   | 50PD180G | 4521               | 8868               | 9.0        | 1.32       | 52.6        |
|               | 2000   | 104   | 50PD200G | 5022               | 9854               | 10.0       | 1.32       | 58.2        |
| Type 33       | 400    | 154   | 50PT40G  | 1378               | 2723               | 3.0        | 1.33       | 18.2        |
|               | 600    | 154   | 50PT60G  | 2068               | 4088               | 5.0        | 1.33       | 26.2        |
|               | 800    | 154   | 50PT80G  | 2757               | 5449               | 6.0        | 1.33       | 34.2        |
|               | 1000   | 154   | 50PT100G | 3446               | 6810               | 8.0        | 1.33       | 42.3        |
|               | 1200   | 154   | 50PT120G | 4135               | 8172               | 9.0        | 1.33       | 5.3         |
|               | 1400   | 154   | 50PT140G | 4825               | 9533               | 11.0       | 1.33       | 58.3        |
|               | 1600   | 154   | 50PT160G | 5514               | 10898              | 12.0       | 1.33       | 66.3        |
|               | 1800   | 154   | 50PT180G | 6203               | 12259              | 14.0       | 1.33       | 74.4        |
|               | 2000   | 154   | 50PT200G | 6892               | 13621              | 15.0       | 1.33       | 82.5        |



## 600

| HEIGHT 600 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| Type 11       | 400    | 63    | 60PS40G  | 682                | 1310               | 1.0        | 1.28       | 11          |
|               | 600    | 63    | 60PS60G  | 1020               | 1969               | 2.0        | 1.28       | 14.3        |
|               | 800    | 63    | 60PS80G  | 1361               | 2624               | 3.0        | 1.28       | 18.5        |
|               | 1000   | 63    | 60PS100G | 1703               | 3279               | 3.0        | 1.28       | 22.7        |
|               | 1200   | 63    | 60PS120G | 2044               | 3934               | 4.0        | 1.28       | 27.0        |
|               | 1400   | 63    | 60PS140G | 2385               | 4589               | 5.0        | 1.28       | 31.2        |
|               | 1600   | 63    | 60PS160G | 2723               | 5248               | 5.0        | 1.28       | 35.5        |
|               | 1800   | 63    | 60PS180G | 3064               | 5903               | 6.0        | 1.28       | 39.7        |
|               | 2000   | 63    | 60PS200G | 3405               | 6558               | 7.0        | 1.28       | 44.0        |
|               | 2300   | 63    | 60PS230G | 3917               | 7541               | 8.0        | 1.28       | 5.3         |
|               | 2600   | 63    | 60PS260G | 4425               | 8527               | 9.0        | 1.28       | 56.7        |
|               | 3000   | 63    | 60PS300G | 5108               | 9837               | 10.0       | 1.28       | 65.2        |
| Type 21       | 400    | 72    | 60PX40G  | 908                | 1757               | 2.0        | 1.30       | 13.6        |
|               | 600    | 72    | 60PX60G  | 1358               | 2637               | 4.0        | 1.30       | 19.6        |
|               | 800    | 72    | 60PX80G  | 1812               | 3514               | 5.0        | 1.30       | 25.7        |
|               | 1000   | 72    | 60PX100G | 2266               | 4395               | 6.0        | 1.30       | 31.8        |
|               | 1200   | 72    | 60PX120G | 2719               | 5275               | 7.0        | 1.30       | 37.9        |
|               | 1400   | 72    | 60PX140G | 3173               | 6152               | 9.0        | 1.30       | 44.0        |
|               | 1600   | 72    | 60PX160G | 3627               | 7032               | 10.0       | 1.30       | 5.5         |
|               | 1800   | 72    | 60PX180G | 4077               | 7909               | 11.0       | 1.30       | 56.1        |
|               | 2000   | 72    | 60PX200G | 4531               | 8789               | 12.0       | 1.30       | 62.3        |
|               | 2300   | 72    | 60PX230G | 5210               | 10106              | 14.0       | 1.30       | 71.3        |
|               | 2600   | 72    | 60PX260G | 5893               | 11427              | 16.0       | 1.30       | 8.5         |
|               | 3000   | 72    | 60PX300G | 6797               | 13184              | 18.0       | 1.30       | 92.6        |



600

| HEIGHT 600 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| Type 22       | 400    | 104   | 60PD40G  | 1160               | 2286               | 2.0        | 1.33       | 15.8        |
|               | 600    | 104   | 60PD60G  | 1740               | 3432               | 4.0        | 1.33       | 22.6        |
|               | 800    | 104   | 60PD80G  | 2320               | 4575               | 5.0        | 1.33       | 29.4        |
|               | 1000   | 104   | 60PD100G | 2900               | 5719               | 6.0        | 1.33       | 36.2        |
|               | 1200   | 104   | 60PD120G | 3480               | 6862               | 7.0        | 1.33       | 43.8        |
|               | 1400   | 104   | 60PD140G | 4060               | 8005               | 9.0        | 1.33       | 50.0        |
|               | 1600   | 104   | 60PD160G | 4640               | 9151               | 10.0       | 1.33       | 56.7        |
|               | 1800   | 104   | 60PD180G | 5220               | 10294              | 11.0       | 1.33       | 63.6        |
|               | 2000   | 104   | 60PD200G | 5800               | 11437              | 12.0       | 1.33       | 74          |
|               | 2300   | 104   | 60PD230G | 6670               | 13153              | 14.0       | 1.33       | 8.6         |
|               | 2600   | 104   | 60PD260G | 7541               | 14869              | 16.0       | 1.33       | 9.9         |
|               | 3000   | 104   | 60PD300G | 8697               | 17156              | 18.0       | 1.33       | 108.7       |
| Type 33       | 400    | 154   | 60PT40G  | 1587               | 3149               | 4.0        | 1.34       | 21.9        |
|               | 600    | 154   | 60PT60G  | 2382               | 4722               | 5.0        | 1.34       | 31.6        |
|               | 800    | 154   | 60PT80G  | 3173               | 6299               | 7.0        | 1.34       | 41.3        |
|               | 1000   | 154   | 60PT100G | 3968               | 7871               | 9.0        | 1.34       | 51.2        |
|               | 1200   | 154   | 60PT120G | 4760               | 9444               | 11.0       | 1.34       | 6.7         |
|               | 1400   | 154   | 60PT140G | 5555               | 11021              | 12.0       | 1.34       | 7.4         |
|               | 1600   | 154   | 60PT160G | 6346               | 12594              | 14.0       | 1.34       | 8.7         |
|               | 1800   | 154   | 60PT180G | 7141               | 14170              | 16.0       | 1.34       | 89.8        |
|               | 2000   | 154   | 60PT200G | 7933               | 15743              | 18.0       | 1.34       | 103.4       |
|               | 2300   | 154   | 60PT230G | 9124               | 18104              | 20.0       | 1.34       | 114.0       |
|               | 2600   | 154   | 60PT260G | 10314              | 20465              | 23.0       | 1.34       | 128.5       |
|               | 3000   | 154   | 60PT300G | 11901              | 23614              | 26.0       | 1.34       | 148.0       |



# 900

| HEIGHT 900 mm | LENGTH | DEPTH | ITEM NO          | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|------------------|--------------------|--------------------|------------|------------|-------------|
| Type 21       |        |       |                  |                    |                    |            |            |             |
|               | 900    | 72    | F092109009010300 | 2736               | 5422               | 8.1        | 1.34       | 43.2        |
| Type 22       |        |       |                  |                    |                    |            |            |             |
|               | 900    | 104   | F092209009010300 | 3548               | 7066               | 8.1        | 1.35       | 49.8        |