



Data sheet

2026-04-15

# Select Compact

Myson Select Compact is a prime traditional panel radiator



- ✓ High heat output
- ✓ Lightweight
- ✓ 4-tap connections
- ✓ Top grille & side panels standard
- ✓ Eco-friendly

Myson **Select Compact** is the ultimate in radiator design. It uses a 33mm pitch which our years of manufacturing expertise and research have established to be the optimum design for a Compact radiator. The Select Compact delivers impressive outputs whilst using a low water temperature, and is available in four types; single convector, double convector, double panel extra, and triple convector, all with factory fitted top grille and side panels as standard. It is lightweight and uses less steel for a lower carbon footprint.



### Area of application

The Select Compact is ideal for 2-pipe pumped indirect domestic and commercial heating applications. It features a 33mm pitch for optimal design, impressive heat output at low water content, lightweight construction using 33% less steel, and is available in 222 sizes with 4-tap connections.

### Sizing

For selecting or calculating the thermal heat power output, please use our design service. For quick selection, use our brochure.

### Usage

Install the Select Compact radiator with the appropriate radiator valves or thermostatic radiator valves for room temperature control. Ensure all connections are secure and that the system is fully bled of air. Check for any

potential leaks and verify that the radiator is heating evenly. Regular maintenance includes cleaning the grill and panels to prevent dust buildup and checking the system pressure. Ensure maximum safety by keeping the radiators clear of obstructions and avoid covering them to maintain optimal performance.

### AMA Text

The Select Compact radiator is constructed with high-grade materials and designed for optimal efficiency. It features a 33mm pitch, maximizing heat output while minimizing water and steel use. This radiator is suitable for 2-pipe pumped indirect systems and comes in single, double, double panel extra, and triple convector types. The range includes 222 sizes with 4-tap connections, ensuring a suitable fit for any space. Factory-fitted top grills and side panels come standard. The Select Compact complies with BS EN 442 and holds the BS Kitemark, offering a 10-year warranty for peace of mind.



# Specifications

| PROPERTIES  | UNIT     | VALUES          |
|---|----------|-----------------|
| ETIM Class  |          | EC011022        |
| Material  |          | Steel           |
| Type  |          | 11, 21, 22, 33  |
| Surface structure                                     |          | Profiled        |
| Max working pressure                                  | EU570056 | 8               |
| Number of standard connections                        |          | 4               |
| Heat output according to recognized EN 442 laboratory |          | Yes             |
| Standard color  |          | Yes             |
| Color   |          | White           |
| Grill/Cover plate                                     |          | Yes             |
| Grill/Cover plate                                     |          | Yes             |
| RAL number  |          | 9016            |
| Gloss value   |          | Glossy          |
| Thread dimension (inch)                               |          | 1/2 inch        |
| Thread connection                                     |          | Internal thread |
| With single-point connection                          |          | Yes             |
| With air vent connection                              |          | Yes             |
| With air valve/vent                                   |          | Yes             |
| With drain option                                     |          | Yes             |



# Documents

| DOCUMENTS                                | DOCUMENT TYPE | LINK  |
|--|---------------|---|
| Myson Complete Solutions - Full Brochure | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b">https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b</a> |
| Myson Panel Radiators - range brochure   | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_c47ba35e-7d74-4e42-8f64-965cfeec973c">https://asset.productmarketingcloud.com/api/assetstorage/3577_c47ba35e-7d74-4e42-8f64-965cfeec973c</a> |
| Product Warranty                         | Warranty      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab">https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab</a> |
| Select Compact Connection Options        | Installation  | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_3ba424c1-a325-43eb-8f23-5115c6c90420">https://asset.productmarketingcloud.com/api/assetstorage/3577_3ba424c1-a325-43eb-8f23-5115c6c90420</a> |




# Resources




ProductImage - Product Picture



ProductImage - Select Compact

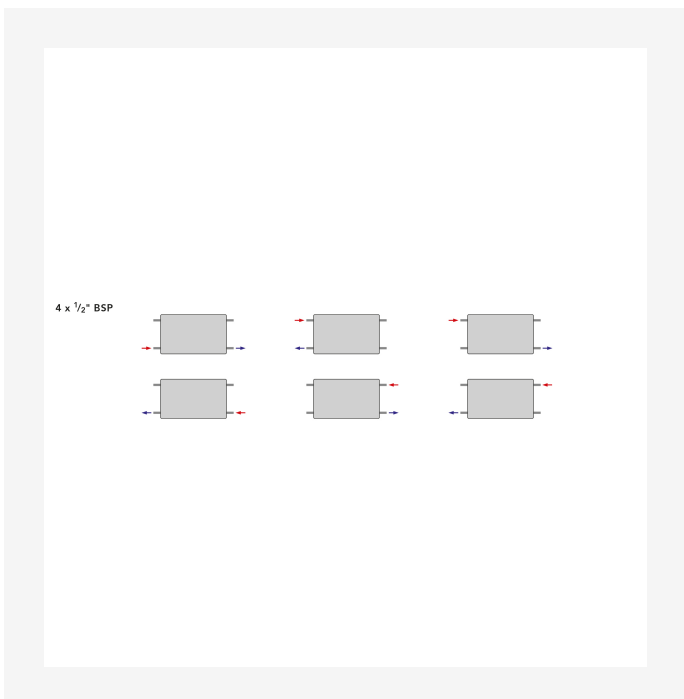

Installation - Select Compact Connection Options

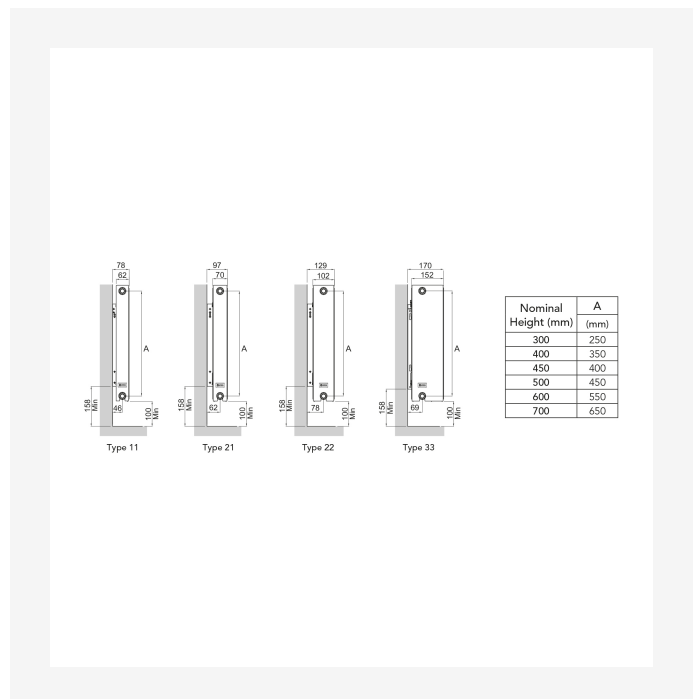

DimensionalDrawing - Select Compact Mounting Positions and Dimensions





# 300

| HEIGHT 300 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| <b>Type 11</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 60    | SS3040G  | 386                | 745                | 4.5        | 1.30       | 3.5         |
|                | 600    | 60    | SS3060G  | 576                | 1119               | 13.5       | 1.30       | 6.0         |
|                | 1000   | 60    | SS30100G | 958                | 1863               | 1.4        | 1.30       | 9.3         |
|                | 1400   | 60    | SS30140G | 1341               | 2607               | 1.7        | 1.30       | 12.8        |
|                | 1800   | 60    | SS30180G | 1726               | 3354               | 2.4        | 1.30       | 15.8        |
|                | 2000   | 60    | SS30200G | 1917               | 3726               | 2.7        | 1.30       | 17.3        |
|                | 2400   | 60    | SS30240G | 2300               | 4470               | 2.7        | 1.30       | 20.4        |
| <b>Type 21</b> |        |       |          |                    |                    |            |            |             |
|                | 600    | 70    | SX3060G  | 811                | 1558               | 12.9       | 1.28       | 8.4         |
|                | 1000   | 70    | SX30100G | 1351               | 2597               | 3.4        | 1.28       | 14.0        |
|                | 1400   | 70    | SX30140G | 1892               | 3635               | 3.3        | 1.28       | 19.6        |
|                | 1800   | 70    | SX30180G | 2432               | 4674               | 3.4        | 1.28       | 25.2        |
| <b>Type 22</b> |        |       |          |                    |                    |            |            |             |
|                | 600    | 102   | SD3060G  | 1007               | 1967               | 1.4        | 1.31       | 11.0        |
|                | 800    | 102   | SD3080G  | 1343               | 2623               | 2.0        | 1.31       | 13.0        |
|                | 1000   | 102   | SD30100G | 1679               | 3279               | 2.7        | 1.31       | 16.3        |
|                | 1400   | 102   | SD30140G | 2350               | 4591               | 3.4        | 1.31       | 22.8        |
|                | 1800   | 102   | SD30180G | 3022               | 5902               | 4.8        | 1.31       | 29.3        |
|                | 2000   | 102   | SD30200G | 3357               | 6558               | 3.4        | 1.31       | 32.6        |
|                | 2400   | 102   | SD30240G | 4029               | 7869               | 0.0        | 1.31       | 39.1        |
| <b>Type 33</b> |        |       |          |                    |                    |            |            |             |
|                | 600    | 152   | ST3060G  | 1408               | 2758               | 19.3       | 1.31       | 14.7        |
|                | 1000   | 152   | ST30100G | 2347               | 4596               | 3.6        | 1.31       | 24.5        |
|                | 1200   | 152   | ST30120G | 2817               | 5515               | 5.1        | 1.31       | 29.4        |



# 300

| HEIGHT 300 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|               | 1400   | 152   | ST30140G | 3286               | 6434               | 51         | 1.31       | 34.3        |
|               | 1800   | 152   | ST30180G | 4225               | 8273               | 51         | 1.31       | 44.1        |
|               | 2000   | 152   | ST30200G | 4695               | 9192               | 51         | 1.31       | 49.0        |



# 400

| HEIGHT 400 mm  | LENGTH | DEPTH    | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|----------|---------|--------------------|--------------------|------------|------------|-------------|
| <b>Type 11</b> |        |          |         |                    |                    |            |            |             |
| 500            | 60     | SS4050G  | 625     | 1215               | 1.7                | 1.30       | 6.7        |             |
| 600            | 60     | SS4060G  | 749     | 1457               | 5.1                | 1.30       | 7.7        |             |
| 700            | 60     | SS4070G  | 874     | 1699               | 2.2                | 1.30       | 8.9        |             |
| 800            | 60     | SS4080G  | 998     | 1941               | 1.3                | 1.30       | 9.8        |             |
| 900            | 60     | SS4090G  | 1123    | 2184               | 2.2                | 1.30       | 11.0       |             |
| 1000           | 60     | SS40100G | 1247    | 2426               | 1.8                | 1.30       | 11.9       |             |
| 1100           | 60     | SS40110G | 1372    | 2668               | 2.2                | 1.30       | 13.3       |             |
| 1200           | 60     | SS40120G | 1496    | 2910               | 2.2                | 1.30       | 14.1       |             |
| 1300           | 60     | SS40130G | 1621    | 3153               | 2.2                | 1.30       | 15.3       |             |
| 1400           | 60     | SS40140G | 1746    | 3395               | 2.4                | 1.30       | 16.1       |             |
| 1600           | 60     | SS40160G | 1996    | 3883               | 2.2                | 1.30       | 18.7       |             |
| 1800           | 60     | SS40180G | 2246    | 4367               | 3.1                | 1.30       | 20.9       |             |
| <b>Type 21</b> |        |          |         |                    |                    |            |            |             |
| 500            | 70     | SX4050G  | 848     | 1643               | 8.8                | 1.29       | 10.2       |             |
| 600            | 70     | SX4060G  | 1017    | 1971               | 10.2               | 1.29       | 11.3       |             |
| 700            | 70     | SX4070G  | 1187    | 2300               | 1.8                | 1.29       | 13.1       |             |
| 800            | 70     | SX4080G  | 1357    | 2629               | 2.2                | 1.29       | 15.0       |             |
| 900            | 70     | SX4090G  | 1526    | 2957               | 2.6                | 1.29       | 16.9       |             |
| 1000           | 70     | SX40100G | 1696    | 3286               | 3.1                | 1.29       | 18.8       |             |
| 1100           | 70     | SX40110G | 1865    | 3614               | 3.5                | 1.29       | 20.6       |             |
| 1200           | 70     | SX40120G | 2035    | 3943               | 3.9                | 1.29       | 22.5       |             |
| 1300           | 70     | SX40130G | 2204    | 4271               | 4.5                | 1.29       | 24.4       |             |
| 1400           | 70     | SX40140G | 2374    | 4600               | 4.5                | 1.29       | 26.3       |             |
| 1600           | 70     | SX40160G | 2713    | 5257               | 5.4                | 1.29       | 30.0       |             |



# 400

| HEIGHT 400 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|                | 1800   | 70    | SX40180G | 3052               | 5914               | 6.3        | 1.29       | 33.8        |
| <b>Type 22</b> |        |       |          |                    |                    |            |            |             |
|                | 500    | 102   | SD4050G  | 1063               | 2083               | 3.4        | 1.32       | 11.0        |
|                | 600    | 102   | SD4060G  | 1275               | 2500               | 1.8        | 1.32       | 13.2        |
|                | 700    | 102   | SD4070G  | 1488               | 2916               | 2.3        | 1.32       | 15.4        |
|                | 800    | 102   | SD4080G  | 1701               | 3333               | 2.7        | 1.32       | 17.6        |
|                | 900    | 102   | SD4090G  | 1913               | 3749               | 3.1        | 1.32       | 19.8        |
|                | 1000   | 102   | SD40100G | 2126               | 4166               | 3.6        | 1.32       | 22.0        |
|                | 1100   | 102   | SD40110G | 2338               | 4583               | 4.5        | 1.32       | 24.2        |
|                | 1200   | 102   | SD40120G | 2551               | 4999               | 4.5        | 1.32       | 26.4        |
|                | 1300   | 102   | SD40130G | 2763               | 5416               | 4.5        | 1.32       | 28.6        |
|                | 1400   | 102   | SD40140G | 2976               | 5832               | 5.0        | 1.32       | 30.4        |
|                | 1600   | 102   | SD40160G | 3401               | 6666               | 4.5        | 1.32       | 34.8        |
|                | 1800   | 102   | SD40180G | 3826               | 7499               | 6.3        | 1.32       | 39.4        |



# 500

| HEIGHT 500 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| <b>Type 11</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 60    | SS5040G  | 608                | 1184               | 4.0        | 1.31       | 7.0         |
|                | 500    | 60    | SS5050G  | 761                | 1481               | 5.0        | 1.31       | 8.4         |
|                | 600    | 60    | SS5060G  | 914                | 1778               | 7.5        | 1.31       | 9.7         |
|                | 700    | 60    | SS5070G  | 1066               | 2074               | 11         | 1.31       | 11.1        |
|                | 800    | 60    | SS5080G  | 1217               | 2368               | 1.4        | 1.31       | 12.3        |
|                | 900    | 60    | SS5090G  | 1369               | 2665               | 1.6        | 1.31       | 13.7        |
|                | 1000   | 60    | SS50100G | 1522               | 2962               | 1.9        | 1.31       | 14.9        |
|                | 1100   | 60    | SS50110G | 1674               | 3258               | 2.2        | 1.31       | 16.1        |
|                | 1200   | 60    | SS50120G | 1827               | 3555               | 2.4        | 1.31       | 17.9        |
|                | 1300   | 60    | SS50130G | 1979               | 3849               | 2.7        | 1.31       | 19.3        |
|                | 1400   | 60    | SS50140G | 2130               | 4146               | 2.7        | 1.31       | 20.6        |
|                | 1500   | 60    | SS50150G | 2283               | 4442               | 3.0        | 1.31       | 22.0        |
|                | 1600   | 60    | SS50160G | 2435               | 4739               | 3.2        | 1.31       | 23.7        |
|                | 1800   | 60    | SS50180G | 2739               | 5330               | 2.7        | 1.31       | 26.3        |
|                | 2000   | 60    | SS50200G | 3044               | 5923               | 2.7        | 1.31       | 28.9        |
|                | 2400   | 60    | SS50240G | 3652               | 7107               | 2.7        | 1.31       | 34.0        |
| <b>Type 21</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 70    | SX5040G  | 808                | 1578               | 8.0        | 1.31       | 10.6        |
|                | 500    | 70    | SX5050G  | 1010               | 1972               | 10.0       | 1.31       | 11.8        |
|                | 600    | 70    | SX5060G  | 1212               | 2367               | 15.0       | 1.31       | 14.1        |
|                | 700    | 70    | SX5070G  | 1414               | 2761               | 2.2        | 1.31       | 16.5        |
|                | 800    | 70    | SX5080G  | 1616               | 3155               | 2.7        | 1.31       | 18.8        |
|                | 900    | 70    | SX5090G  | 1818               | 3550               | 3.3        | 1.31       | 21.2        |
|                | 1000   | 70    | SX50100G | 2020               | 3944               | 3.8        | 1.31       | 23.5        |



# 500

| HEIGHT 500 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|                | 1200   | 70    | SX50120G | 2424               | 4733               | 5.0        | 1.31       | 28.2        |
|                | 1400   | 70    | SX50140G | 2828               | 5522               | 5.5        | 1.31       | 32.9        |
|                | 1600   | 70    | SX50160G | 3232               | 6311               | 6.6        | 1.31       | 37.6        |
|                | 1800   | 70    | SX50180G | 3636               | 7100               | 7.7        | 1.31       | 42.4        |
| <b>Type 22</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 102   | SD5040G  | 1018               | 2006               | 9.0        | 1.33       | 11.1        |
|                | 500    | 102   | SD5050G  | 1273               | 2508               | 13.0       | 1.33       | 13.8        |
|                | 600    | 102   | SD5060G  | 1527               | 3009               | 2.2        | 1.33       | 16.6        |
|                | 700    | 102   | SD5070G  | 1782               | 3511               | 2.8        | 1.33       | 19.4        |
|                | 800    | 102   | SD5080G  | 2036               | 4013               | 3.3        | 1.33       | 22.2        |
|                | 900    | 102   | SD5090G  | 2291               | 4514               | 3.9        | 1.33       | 24.9        |
|                | 1000   | 102   | SD50100G | 2545               | 5016               | 4.4        | 1.33       | 27.7        |
|                | 1100   | 102   | SD50110G | 2800               | 5517               | 5.5        | 1.33       | 30.3        |
|                | 1200   | 102   | SD50120G | 3054               | 6019               | 5.5        | 1.33       | 33.1        |
|                | 1300   | 102   | SD50130G | 3309               | 6520               | 5.5        | 1.33       | 35.8        |
|                | 1400   | 102   | SD50140G | 3563               | 7022               | 5.5        | 1.33       | 38.5        |
|                | 1500   | 102   | SD50150G | 3818               | 7523               | 5.5        | 1.33       | 41.3        |
|                | 1600   | 102   | SD50160G | 4073               | 8025               | 5.5        | 1.33       | 44.2        |
|                | 1800   | 102   | SD50180G | 4582               | 9028               | 7.7        | 1.33       | 49.6        |
|                | 2000   | 102   | SD50200G | 5091               | 10031              | 8.3        | 1.33       | 55.1        |
|                | 2400   | 102   | SD50240G | 6109               | 12038              | 9.9        | 1.33       | 66.1        |
| <b>Type 33</b> |        |       |          |                    |                    |            |            |             |
|                | 600    | 152   | ST5060G  | 2105               | 4166               | 19.5       | 1.34       | 25.0        |
|                | 700    | 152   | ST5070G  | 2455               | 4860               | 3.3        | 1.34       | 29.1        |
|                | 800    | 152   | ST5080G  | 2806               | 5555               | 4.1        | 1.34       | 33.3        |



# 500

| HEIGHT 500 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|               | 900    | 152   | ST5090G  | 3157               | 6249               | 4.9        | 1.34       | 37.5        |
|               | 1000   | 152   | ST50100G | 3508               | 6943               | 5.8        | 1.34       | 41.6        |
|               | 1100   | 152   | ST50110G | 3858               | 7638               | 6.6        | 1.34       | 45.8        |
|               | 1200   | 152   | ST50120G | 4209               | 8332               | 7.4        | 1.34       | 50.0        |
|               | 1400   | 152   | ST50140G | 4911               | 9721               | 9.0        | 1.34       | 58.3        |
|               | 1600   | 152   | ST50160G | 5612               | 11109              | 9.8        | 1.34       | 66.6        |
|               | 1800   | 152   | ST50180G | 6314               | 12498              | 11.5       | 1.34       | 74.9        |
|               | 2000   | 152   | ST50200G | 7015               | 13887              | 8.2        | 1.34       | 83.3        |
|               | 2300   | 152   | ST50230G | 8067               | 15970              | 8.2        | 1.34       | 95.7        |



# 600

| HEIGHT 600 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| <b>Type 11</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 60    | SS6040G  | 711                | 1389               | 2.4        | 1.31       | 8.3         |
|                | 500    | 60    | SS6050G  | 890                | 1737               | 5.4        | 1.31       | 9.9         |
|                | 600    | 60    | SS6060G  | 1068               | 2085               | 1.0        | 1.31       | 11.5        |
|                | 700    | 60    | SS6070G  | 1246               | 2433               | 2.0        | 1.31       | 13.1        |
|                | 800    | 60    | SS6080G  | 1423               | 2777               | 2.0        | 1.31       | 14.7        |
|                | 900    | 60    | SS6090G  | 1601               | 3125               | 2.0        | 1.31       | 16.5        |
|                | 1000   | 60    | SS60100G | 1779               | 3473               | 2.0        | 1.31       | 18.2        |
|                | 1100   | 60    | SS60110G | 1957               | 3821               | 3.0        | 1.31       | 19.4        |
|                | 1200   | 60    | SS60120G | 2136               | 4169               | 3.0        | 1.31       | 21.3        |
|                | 1300   | 60    | SS60130G | 2312               | 4514               | 3.2        | 1.31       | 23.0        |
|                | 1400   | 60    | SS60140G | 2491               | 4862               | 3.8        | 1.31       | 24.6        |
|                | 1600   | 60    | SS60160G | 2847               | 5558               | 4.0        | 1.31       | 28.3        |
|                | 1800   | 60    | SS60180G | 3202               | 6251               | 4.5        | 1.31       | 31.4        |
|                | 2000   | 60    | SS60200G | 3558               | 6947               | 5.0        | 1.31       | 34.5        |
|                | 2400   | 60    | SS60240G | 4270               | 7643               | 5.8        | 1.31       | 40.7        |
| <b>Type 21</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 70    | SX6040G  | 932                | 1829               | 4.3        | 1.32       | 11.3        |
|                | 500    | 70    | SX6050G  | 1165               | 2286               | 9.8        | 1.32       | 14.2        |
|                | 600    | 70    | SX6060G  | 1398               | 2743               | 6.6        | 1.32       | 17.0        |
|                | 700    | 70    | SX6070G  | 1631               | 3200               | 6.6        | 1.32       | 19.8        |
|                | 800    | 70    | SX6080G  | 1864               | 3658               | 6.6        | 1.32       | 22.6        |
|                | 900    | 70    | SX6090G  | 2097               | 4115               | 6.6        | 1.32       | 25.5        |
|                | 1000   | 70    | SX60100G | 2330               | 4572               | 6.6        | 1.32       | 28.3        |
|                | 1100   | 70    | SX60110G | 2563               | 5029               | 6.6        | 1.32       | 31.1        |



# 600

| HEIGHT 600 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|                | 1200   | 70    | SX60120G | 2796               | 5486               | 6.6        | 1.32       | 34.0        |
|                | 1300   | 70    | SX60130G | 3030               | 5944               | 6.5        | 1.32       | 36.6        |
|                | 1400   | 70    | SX60140G | 3263               | 6401               | 7.2        | 1.32       | 39.4        |
|                | 1600   | 70    | SX60160G | 3729               | 7315               | 6.6        | 1.32       | 45.3        |
|                | 1800   | 70    | SX60180G | 4195               | 8230               | 9.2        | 1.32       | 50.9        |
| <b>Type 22</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 102   | SD6040G  | 1179               | 2332               | 6.1        | 1.34       | 13.4        |
|                | 500    | 102   | SD6050G  | 1474               | 2916               | 18.3       | 1.34       | 16.7        |
|                | 600    | 102   | SD6060G  | 1769               | 3499               | 6.6        | 1.34       | 20.0        |
|                | 700    | 102   | SD6070G  | 2064               | 4082               | 6.6        | 1.34       | 23.4        |
|                | 800    | 102   | SD6080G  | 2358               | 4665               | 6.6        | 1.34       | 26.7        |
|                | 900    | 102   | SD6090G  | 2653               | 5248               | 6.6        | 1.34       | 30.1        |
|                | 1000   | 102   | SD60100G | 2948               | 5831               | 6.6        | 1.34       | 33.7        |
|                | 1100   | 102   | SD60110G | 3243               | 6414               | 5.9        | 1.34       | 36.7        |
|                | 1200   | 102   | SD60120G | 3538               | 6997               | 6.0        | 1.34       | 40.1        |
|                | 1300   | 102   | SD60130G | 3832               | 7580               | 6.6        | 1.34       | 43.2        |
|                | 1400   | 102   | SD60140G | 4127               | 8164               | 7.9        | 1.34       | 46.2        |
|                | 1600   | 102   | SD60160G | 4717               | 9330               | 6.6        | 1.34       | 53.1        |
|                | 1800   | 102   | SD60180G | 5306               | 10496              | 6.6        | 1.34       | 59.8        |
|                | 2000   | 102   | SD60200G | 5896               | 11662              | 10.6       | 1.34       | 66.5        |
|                | 2400   | 102   | SD60240G | 7075               | 13995              | 11.9       | 1.34       | 79.9        |
| <b>Type 33</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 152   | ST6040G  | 1615               | 3215               | 6.3        | 1.35       | 20.1        |
|                | 500    | 152   | ST6050G  | 2018               | 4019               | 12.6       | 1.35       | 25.0        |
|                | 600    | 152   | ST6060G  | 2422               | 4823               | 3.9        | 1.35       | 29.4        |



# 600

| HEIGHT 600 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|               | 700    | 152   | ST6070G  | 2825               | 5627               | 9.8        | 1.35       | 33.9        |
|               | 800    | 152   | ST6080G  | 3229               | 6431               | 5.9        | 1.35       | 38.4        |
|               | 900    | 152   | ST6090G  | 3633               | 7235               | 9.8        | 1.35       | 42.8        |
|               | 1000   | 152   | ST60100G | 4036               | 8039               | 7.8        | 1.35       | 47.3        |
|               | 1100   | 152   | ST60110G | 4440               | 8843               | 9.8        | 1.35       | 51.8        |
|               | 1200   | 152   | ST60120G | 4844               | 9646               | 9.8        | 1.35       | 56.3        |
|               | 1400   | 152   | ST60140G | 5651               | 11254              | 10.8       | 1.35       | 65.2        |
|               | 1600   | 152   | ST60160G | 6458               | 12862              | 11.8       | 1.35       | 74.2        |
|               | 1800   | 152   | ST60180G | 7266               | 14470              | 14.0       | 1.35       | 83.1        |
|               | 2000   | 152   | ST60200G | 8073               | 16077              | 15.7       | 1.35       | 100.4       |
|               | 2300   | 152   | ST60230G | 9127               | 18120              | 9.8        | 1.35       | 105.5       |



# 750

| HEIGHT 750 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| <b>Type 11</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 60    | SS7540G  | 857                | 1679               | 9.6        | 1.31       | 9.0         |
|                | 500    | 60    | SS7550G  | 1071               | 2098               | 2.0        | 1.31       | 11.2        |
|                | 600    | 60    | SS7560G  | 1286               | 2518               | 3.0        | 1.31       | 13.4        |
|                | 700    | 60    | SS7570G  | 1500               | 2938               | 4.0        | 1.31       | 15.7        |
|                | 800    | 60    | SS7580G  | 1714               | 3357               | 3.1        | 1.31       | 18.8        |
|                | 900    | 60    | SS7590G  | 1928               | 3777               | 3.5        | 1.31       | 21.8        |
|                | 1000   | 60    | SS75100G | 2143               | 4197               | 3.9        | 1.31       | 23.5        |
|                | 1200   | 60    | SS75120G | 2571               | 5036               | 4.6        | 1.31       | 28.2        |
|                | 1400   | 60    | SS75140G | 3000               | 5875               | 5.4        | 1.31       | 32.9        |
|                | 1600   | 60    | SS75160G | 3428               | 6715               | 6.2        | 1.31       | 37.6        |
| <b>Type 21</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 70    | SX7540G  | 1111               | 2192               | 14.0       | 1.33       | 14.1        |
|                | 500    | 70    | SX7550G  | 1389               | 2740               | 6.6        | 1.33       | 17.6        |
|                | 600    | 70    | SX7560G  | 1666               | 3288               | 6.6        | 1.33       | 21.2        |
|                | 700    | 70    | SX7570G  | 1944               | 3836               | 6.6        | 1.33       | 23.9        |
|                | 800    | 70    | SX7580G  | 2222               | 4384               | 19.8       | 1.33       | 27.4        |
|                | 900    | 70    | SX7590G  | 2500               | 4932               | 19.8       | 1.33       | 31.8        |
|                | 1000   | 70    | SX75100G | 2777               | 5480               | 7.8        | 1.33       | 34.2        |
|                | 1200   | 70    | SX75120G | 3333               | 6576               | 8.3        | 1.33       | 42.4        |
|                | 1400   | 70    | SX75140G | 3888               | 7672               | 8.3        | 1.33       | 49.4        |
|                | 1600   | 70    | SX75160G | 4444               | 8767               | 7.0        | 1.33       | 56.5        |
| <b>Type 22</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 102   | SD7540G  | 1411               | 2805               | 6.6        | 1.35       | 16.8        |
|                | 500    | 102   | SD7550G  | 1764               | 3506               | 3.8        | 1.35       | 21.0        |
|                | 600    | 102   | SD7560G  | 2117               | 4207               | 8.0        | 1.35       | 24.0        |



# 750

| HEIGHT 750 mm  | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
|                | 700    | 102   | SD7570G  | 2470               | 4908               | 13.0       | 1.35       | 29.4        |
|                | 800    | 102   | SD7580G  | 2822               | 5609               | 3.0        | 1.35       | 32.0        |
|                | 900    | 102   | SD7590G  | 3175               | 6310               | 3.8        | 1.35       | 37.8        |
|                | 1000   | 102   | SD75100G | 3528               | 7012               | 7.6        | 1.35       | 0.0         |
|                | 1200   | 102   | SD75120G | 4234               | 8414               | 8.3        | 1.35       | 50.5        |
|                | 1400   | 102   | SD75140G | 4939               | 9816               | 8.3        | 1.35       | 58.9        |
|                | 1600   | 102   | SD75160G | 5645               | 11219              | 7.6        | 1.35       | 43.5        |
| <b>Type 33</b> |        |       |          |                    |                    |            |            |             |
|                | 400    | 152   | ST7540G  | 1885               | 3757               | 22.5       | 1.35       | 27.8        |
|                | 500    | 152   | ST7550G  | 2356               | 4697               | 9.8        | 1.35       | 34.8        |
|                | 600    | 152   | ST7560G  | 2827               | 5636               | 9.8        | 1.35       | 41.7        |
|                | 700    | 152   | ST7570G  | 3298               | 6575               | 9.8        | 1.35       | 48.7        |
|                | 800    | 152   | ST7580G  | 3770               | 7515               | 29.4       | 1.35       | 55.6        |
|                | 900    | 152   | ST7590G  | 4241               | 8454               | 10.4       | 1.35       | 62.6        |
|                | 1000   | 152   | ST75100G | 4712               | 9393               | 11.5       | 1.35       | 69.6        |
|                | 1200   | 152   | ST75120G | 5654               | 11272              | 12.3       | 1.35       | 69.6        |
|                | 1400   | 152   | ST75140G | 6597               | 13151              | 12.3       | 1.35       | 69.6        |



# 900

| HEIGHT 900 mm  | LENGTH | DEPTH    | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|----------|---------|--------------------|--------------------|------------|------------|-------------|
| <b>Type 33</b> |        |          |         |                    |                    |            |            |             |
| 400            | 152    | ST9040G  | 2777    | 4449               | 12.3               | 1.36       | 37.9       |             |
| 500            | 152    | ST9050G  | 3472    | 5562               | 12.3               | 1.36       | 47.3       |             |
| 600            | 152    | ST9060G  | 4166    | 6674               | 12.3               | 1.36       | 56.8       |             |
| 700            | 152    | ST9070G  | 4860    | 7786               | 6.6                | 1.36       | 66.3       |             |
| 800            | 152    | ST9080G  | 5555    | 8898               | 8.3                | 1.36       | 75.8       |             |
| 900            | 152    | ST9090G  | 6249    | 10011              | 9.9                | 1.36       | 85.2       |             |
| 1000           | 152    | ST90100G | 6943    | 11123              | 11.6               | 1.36       | 94.7       |             |
| 1200           | 152    | ST90120G | 8332    | 13348              | 12.0               | 1.36       | 113.6      |             |
| 1400           | 152    | ST90140G | 9721    | 15572              | 13.3               | 1.36       | 132.6      |             |