



Data sheet

2026-07-04

Select Compact

Myson Select Compact is a prime traditional panel radiator



- ✓ High heat output
- ✓ Lightweight
- ✓ 4-tap connections
- ✓ Top grille & side panels standard
- ✓ Eco-friendly

Myson **Select Compact** is the ultimate in radiator design. It uses a 33mm pitch which our years of manufacturing expertise and research have established to be the optimum design for a Compact radiator. The Select Compact delivers impressive outputs whilst using a low water temperature, and is available in four types; single convector, double convector, double panel extra, and triple convector, all with factory fitted top grille and side panels as standard. It is lightweight and uses less steel for a lower carbon footprint.



Area of application

The Select Compact is ideal for 2-pipe pumped indirect domestic and commercial heating applications. It features a 33mm pitch for optimal design, impressive heat output at low water content, lightweight construction using 33% less steel, and is available in 222 sizes with 4-tap connections.

Sizing

For selecting or calculating the thermal heat power output, please use our design service. For quick selection, use our brochure.

Usage

Install the Select Compact radiator with the appropriate radiator valves or thermostatic radiator valves for room temperature control. Ensure all connections are secure and that the system is fully bled of air. Check for any

potential leaks and verify that the radiator is heating evenly. Regular maintenance includes cleaning the grill and panels to prevent dust buildup and checking the system pressure. Ensure maximum safety by keeping the radiators clear of obstructions and avoid covering them to maintain optimal performance.

AMA Text

The Select Compact radiator is constructed with high-grade materials and designed for optimal efficiency. It features a 33mm pitch, maximizing heat output while minimizing water and steel use. This radiator is suitable for 2-pipe pumped indirect systems and comes in single, double, double panel extra, and triple convector types. The range includes 222 sizes with 4-tap connections, ensuring a suitable fit for any space. Factory-fitted top grills and side panels come standard. The Select Compact complies with BS EN 442 and holds the BS Kitemark, offering a 10-year warranty for peace of mind.



Specifications

PROPERTIES	UNIT	VALUES
ETIM Class		EC011022
Material		Steel
Type		11, 21, 22, 33
Surface structure		Profiled
Max working pressure	bar	8
Number of standard connections		4
Heat output according to recognized EN 442 laboratory		Yes
Max. Operating Temperature	°C	110
Standard color		Yes
Color		White
RAL number		9016
Grill/Cover plate		Yes
Grill/Cover plate		Yes
Gloss value		Glossy
Thread dimension (inch)		1/2 inch
Thread connection		Internal thread
With single-point connection		Yes
With air vent connection		Yes
With air valve/vent		Yes
With drain option		Yes



Documents

DOCUMENTS	DOCUMENT TYPE	LINK
Myson Complete Solutions - Full Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b
Myson Panel Radiators - range brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_c47ba35e-7d74-4e42-8f64-965cfeec973c
Product Warranty	Warranty	https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab
Select Compact Connection Options	Installation	https://asset.productmarketingcloud.com/api/assetstorage/3577_3ba424c1-a325-43eb-8f23-5115c6c90420




Resources




ProductImage - Select Compact



ProductImage - Select Compact

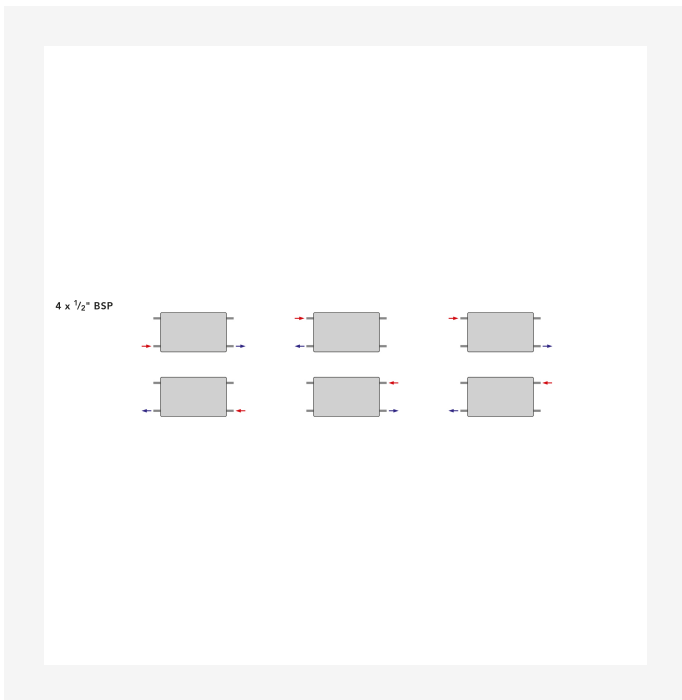


Installation - Select Compact Connection Options

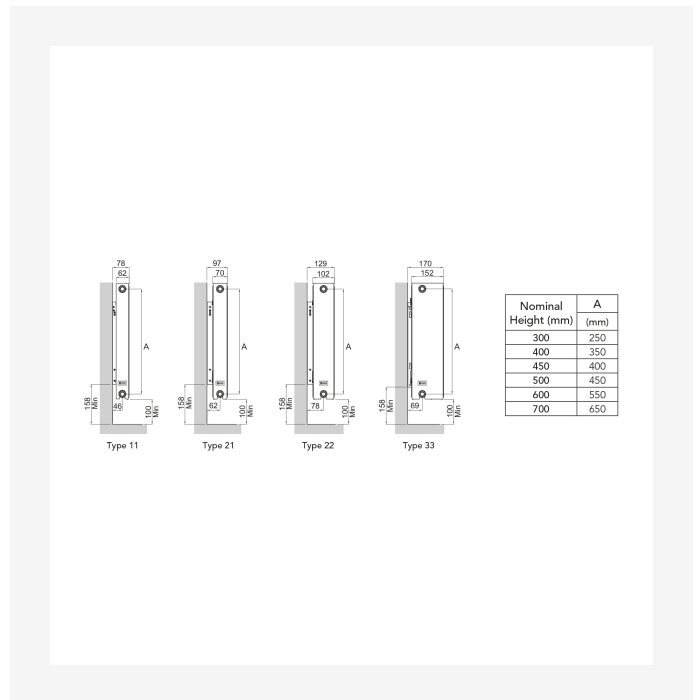

DimensionalDrawing - Select Compact Mounting Positions and Dimensions



Resources

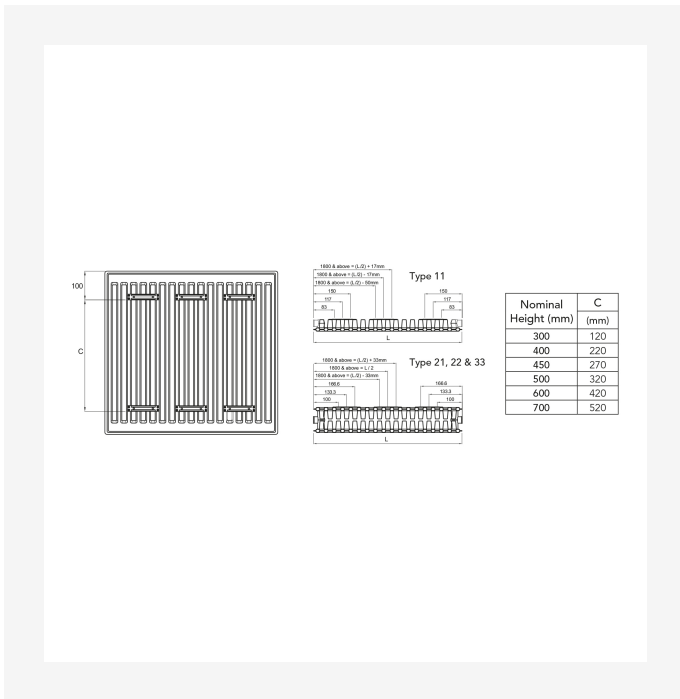

Dimensional Drawing - Select Compact Bracket Positions and Dimensions



Related products



Matchmate



Vertical



Finesse



Matchmaster



Matchmaster PF90



Rio Compact PLUS



Rio Plan PLUS



Rio Linea PLUS



Decorative TRV Valves



Decorative Modern Valves



Decorative TRV Valve Pack



Decorative Slimline Valves



Related products



Decorative Traditional Valves



Myson Plus Manual Valves



Myson Plus Radiator Packs



Myson Plus TRV Valves



TRV2



TRV2 Radiator Packs



300

HEIGHT 300 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
Type 11									
	400	60	SS3040GP	SS3040G	386,	745,	4.5	1.30	3.5
	600	60	SS3060GP	SS3060G	576,	1119,	13.5	1.30	6.0
	1000	60	SS30100GP	SS30100G	958,	1863,	1.4	1.30	9.3
	1400	60	SS30140GP	SS30140G	1341,	2607,	1.7	1.30	12.8
	1800	60	SS30180G		1726	3354	2.4	1.30	15.8
	2000	60	SS30200GP	SS30200G	1917,	3726,	2.7	1.30	17.3
	2400	60	SS30240G		2300	4470	2.7	1.30	20.4
Type 21									
	600	70	SX3060G		811	1558	12.9	1.28	8.4
	1000	70	SX30100G		1351	2597	3.4	1.28	14.0
	1400	70	SX30140G		1892	3635	3.3	1.28	19.6
	1800	70	SX30180G		2432	4674	3.4	1.28	25.2
Type 22									
	600	102	SD3060GP	SD3060G	1007,	1967,	1.4	1.31	11.0
	800	102	SD3080GP	SD3080G	1343,	2623,	2.0	1.31	13.0
	1000	102	SD30100GP	SD30100G	1679,	3279,	2.7	1.31	16.3
	1400	102	SD30140GP	SD30140G	2350,	4591,	3.4	1.31	22.8
	1800	102	SD30180GP	SD30180G	3022,	5902,	4.8	1.31	29.3
	2000	102	SD30200GP	SD30200G	3357,	6558,	3.4	1.31	32.6
	2400	102	SD30240G		4029	7869	0.0	1.31	39.1
Type 33									
	600	152	ST3060G		1408	2758	19.3	1.31	14.7
	1000	152	ST30100G		2347	4596	3.6	1.31	24.5
	1200	152	ST30120G		2817	5515	5.1	1.31	29.4



300

HEIGHT 300 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
	1400	152	ST30140G		3286	6434	5.1	1.31	34.3
	1800	152	ST30180G		4225	8273	5.1	1.31	44.1
	2000	152	ST30200G		4695	9192	5.1	1.31	49.0



400

HEIGHT 400 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
Type 11									
	500	60	SS4050GP	SS4050G	625,	1215,	1.7	1.30	6.7
	600	60	SS4060GP	SS4060G	749,	1457,	5.1	1.30	7.7
	700	60	SS4070GP	SS4070G	874,	1699,	2.2	1.30	8.9
	800	60	SS4080GP	SS4080G	998,	1941,	1.3	1.30	9.8
	900	60	SS4090GP	SS4090G	1123,	2184,	2.2	1.30	11.0
	1000	60	SS40100GP	SS40100G	1247,	2426,	1.8	1.30	11.9
	1100	60	SS40110GP	SS40110G	1372,	2668,	2.2	1.30	13.3
	1200	60	SS40120GP	SS40120G	1496,	2910,	2.2	1.30	14.1
	1300	60	SS40130GP	SS40130G	1621,	3153,	2.2	1.30	15.3
	1400	60	SS40140GP	SS40140G	1746,	3395,	2.4	1.30	16.1
	1600	60	SS40160GP	SS40160G	1996,	3883,	2.2	1.30	18.7
	1800	60	SS40180GP	SS40180G	2246,	4367,	3.1	1.30	20.9
Type 21									
	500	70	SX4050G		848	1643	8.8	1.29	10.2
	600	70	SX4060G		1017	1971	10.2	1.29	11.3
	700	70	SX4070G		1187	2300	1.8	1.29	13.1
	800	70	SX4080G		1357	2629	2.2	1.29	15.0
	900	70	SX4090G		1526	2957	2.6	1.29	16.9
	1000	70	SX40100G		1696	3286	3.1	1.29	18.8
	1100	70	SX40110G		1865	3614	3.5	1.29	20.6
	1200	70	SX40120G		2035	3943	3.9	1.29	22.5
	1300	70	SX40130G		2204	4271	4.5	1.29	24.4
	1400	70	SX40140G		2374	4600	4.5	1.29	26.3
	1600	70	SX40160G		2713	5257	5.4	1.29	30.0
	1800	70	SX40180G		3052	5914	6.3	1.29	33.8



400

HEIGHT 400 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
Type 22									
	500	102	SD4050GP	SD4050G	1063,	2083,	3.4	1.32	11.0
	600	102	SD4060GP	SD4060G	1275,	2500,	1.8	1.32	13.2
	700	102	SD4070GP	SD4070G	1488,	2916,	2.3	1.32	15.4
	800	102	SD4080GP	SD4080G	1701,	3333,	2.7	1.32	17.6
	900	102	SD4090GP	SD4090G	1913,	3749,	3.1	1.32	19.8
	1000	102	SD40100GP	SD40100G	2126,	4166,	3.6	1.32	22.0
	1100	102	SD40110GP	SD40110G	2338,	4583,	4.5	1.32	24.2
	1200	102	SD40120GP	SD40120G	2551,	4999,	4.5	1.32	26.4
	1300	102	SD40130GP	SD40130G	2763,	5416,	4.5	1.32	28.6
	1400	102	SD40140GP	SD40140G	2976,	5832,	5.0	1.32	30.4
	1600	102	SD40160GP	SD40160G	3401,	6666,	4.5	1.32	34.8
	1800	102	SD40180GP	SD40180G	3826,	7499,	6.3	1.32	39.4



500

HEIGHT 500 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
Type 11									
	400	60	SS5040GP	SS5040G	608,	1184,	4.0	1.31	7.0
	500	60	SS5050GP	SS5050G	761,	1481,	5.0	1.31	8.4
	600	60	SS5060GP	SS5060G	914,	1778,	7.5	1.31	9.7
	700	60	SS5070GP	SS5070G	1066,	2074,	11	1.31	11.1
	800	60	SS5080GP	SS5080G	1217,	2368,	14	1.31	12.3
	900	60	SS5090GP	SS5090G	1369,	2665,	16	1.31	13.7
	1000	60	SS50100GP	SS50100G	1522,	2962,	19	1.31	14.9
	1100	60	SS50110GP	SS50110G	1674,	3258,	2.2	1.31	16.1
	1200	60	SS50120GP	SS50120G	1827,	3555,	2.4	1.31	17.9
	1300	60	SS50130GP	SS50130G	1979,	3849,	2.7	1.31	19.3
	1400	60	SS50140GP	SS50140G	2130,	4146,	2.7	1.31	20.6
	1500	60	SS50150GP	SS50150G	2283,	4442,	3.0	1.31	22.0
	1600	60	SS50160GP	SS50160G	2435,	4739,	3.2	1.31	23.7
	1800	60	SS50180GP	SS50180G	2739,	5330,	2.7	1.31	26.3
	2000	60	SS50200GP	SS50200G	3044,	5923,	2.7	1.31	28.9
	2400	60		SS50240G	3652	7107	2.7	1.31	34.0
Type 21									
	400	70		SX5040G	808	1578	8.0	1.31	10.6
	500	70		SX5050G	1010	1972	10.0	1.31	11.8
	600	70		SX5060G	1212	2367	15.0	1.31	14.1
	700	70		SX5070G	1414	2761	2.2	1.31	16.5
	800	70		SX5080G	1616	3155	2.7	1.31	18.8
	900	70		SX5090G	1818	3550	3.3	1.31	21.2
	1000	70		SX50100G	2020	3944	3.8	1.31	23.5
	1200	70		SX50120G	2424	4733	5.0	1.31	28.2



500

HEIGHT 500 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
	1400	70	SX50140G		2828	5522	5.5	1.31	32.9
	1600	70	SX50160G		3232	6311	6.6	1.31	37.6
	1800	70	SX50180G		3636	7100	7.7	1.31	42.4
Type 22									
	400	102	SD5040GP	SD5040G	1018,	2006,	9.0	1.33	11.1
	500	102	SD5050GP	SD5050G	1273,	2508,	13.0	1.33	13.8
	600	102	SD5060GP	SD5060G	1527,	3009,	2.2	1.33	16.6
	700	102	SD5070GP	SD5070G	1782,	3511,	2.8	1.33	19.4
	800	102	SD5080GP	SD5080G	2036,	4013,	3.3	1.33	22.2
	900	102	SD5090GP	SD5090G	2291,	4514,	3.9	1.33	24.9
	1000	102	SD50100GP	SD50100G	2545,	5016,	4.4	1.33	27.7
	1100	102	SD50110GP	SD50110G	2800,	5517,	5.5	1.33	30.3
	1200	102	SD50120GP	SD50120G	3054,	6019,	5.5	1.33	33.1
	1300	102	SD50130GP	SD50130G	3309,	6520,	5.5	1.33	35.8
	1400	102	SD50140GP	SD50140G	3563,	7022,	5.5	1.33	38.5
	1500	102	SD50150GP	SD50150G	3818,	7523,	5.5	1.33	41.3
	1600	102	SD50160GP	SD50160G	4073,	8025,	5.5	1.33	44.2
	1800	102	SD50180GP	SD50180G	4582,	9028,	7.7	1.33	49.6
	2000	102	SD50200GP	SD50200G	5091,	10031,	8.3	1.33	55.1
	2400	102	SD50240G		6109	12038	9.9	1.33	66.1
Type 33									
	600	152	ST5060G		2105	4166	19.5	1.34	25.0
	700	152	ST5070G		2455	4860	3.3	1.34	29.1
	800	152	ST5080G		2806	5555	4.1	1.34	33.3
	900	152	ST5090G		3157	6249	4.9	1.34	37.5
	1000	152	ST50100G		3508	6943	5.8	1.34	41.6



500

HEIGHT 500 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
	1100	152		ST50110G	3858	7638	6.6	1.34	45.8
	1200	152		ST50120G	4209	8332	7.4	1.34	50.0
	1400	152		ST50140G	4911	9721	9.0	1.34	58.3
	1600	152		ST50160G	5612	11109	9.8	1.34	66.6
	1800	152		ST50180G	6314	12498	11.5	1.34	74.9
	2000	152		ST50200G	7015	13887	8.2	1.34	83.3
	2300	152		ST50230G	8067	15970	8.2	1.34	95.7



600

HEIGHT 600 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
Type 11									
	400	60	SS6040GP	SS6040G	711,	1389,	2.4	1.31	8.3
	500	60	SS6050GP	SS6050G	890,	1737,	5.4	1.31	9.9
	600	60	SS6060GP	SS6060G	1068,	2085,	1.0	1.31	11.5
	700	60	SS6070GP	SS6070G	1246,	2433,	2.0	1.31	13.1
	800	60	SS6080GP	SS6080G	1423,	2777,	2.0	1.31	14.7
	900	60	SS6090GP	SS6090G	1601,	3125,	2.0	1.31	16.5
	1000	60	SS60100GP	SS60100G	1779,	3473,	2.0	1.31	18.2
	1100	60	SS60110GP	SS60110G	1957,	3821,	3.0	1.31	19.4
	1200	60	SS60120GP	SS60120G	2136,	4169,	3.0	1.31	21.3
	1300	60	SS60130GP	SS60130G	2312,	4514,	3.2	1.31	23.0
	1400	60	SS60140GP	SS60140G	2491,	4862,	3.8	1.31	24.6
	1600	60	SS60160GP	SS60160G	2847,	5558,	4.0	1.31	28.3
	1800	60	SS60180GP	SS60180G	3202,	6251,	4.5	1.31	31.4
	2000	60	SS60200GP	SS60200G	3558,	6947,	5.0	1.31	34.5
	2400	60	SS60240G		4270	7643	5.8	1.31	40.7
Type 21									
	400	70	SX6040G		932	1829	4.3	1.32	11.3
	500	70	SX6050G		1165	2286	9.8	1.32	14.2
	600	70	SX6060G		1398	2743	6.6	1.32	17.0
	700	70	SX6070G		1631	3200	6.6	1.32	19.8
	800	70	SX6080G		1864	3658	6.6	1.32	22.6
	900	70	SX6090G		2097	4115	6.6	1.32	25.5
	1000	70	SX60100G		2330	4572	6.6	1.32	28.3
	1100	70	SX60110G		2563	5029	6.6	1.32	31.1
	1200	70	SX60120G		2796	5486	6.6	1.32	34.0



600

HEIGHT 600 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
	1300	70	SX60130G		3030	5944	6.5	1.32	36.6
	1400	70	SX60140G		3263	6401	7.2	1.32	39.4
	1600	70	SX60160G		3729	7315	6.6	1.32	45.3
	1800	70	SX60180G		4195	8230	9.2	1.32	50.9
Type 22									
	400	102	SD6040GP	SD6040G	1179,	2332,	6.1	1.34	13.4
	500	102	SD6050GP	SD6050G	1474,	2916,	18.3	1.34	16.7
	600	102	SD6060GP	SD6060G	1769,	3499,	6.6	1.34	20.0
	700	102	SD6070GP	SD6070G	2064,	4082,	6.6	1.34	23.4
	800	102	SD6080GP	SD6080G	2358,	4665,	6.6	1.34	26.7
	900	102	SD6090GP	SD6090G	2653,	5248,	6.6	1.34	30.1
	1000	102	SD60100GP	SD60100G	2948,	5831,	6.6	1.34	33.7
	1100	102	SD60110GP	SD60110G	3243,	6414,	5.9	1.34	36.7
	1200	102	SD60120GP	SD60120G	3538,	6997,	6.0	1.34	40.1
	1300	102	SD60130GP	SD60130G	3832,	7580,	6.6	1.34	43.2
	1400	102	SD60140GP	SD60140G	4127,	8164,	7.9	1.34	46.2
	1600	102	SD60160GP	SD60160G	4717,	9330,	6.6	1.34	53.1
	1800	102	SD60180GP	SD60180G	5306,	10496,	6.6	1.34	59.8
	2000	102	SD60200GP	SD60200G	5896,	11662,	10.6	1.34	66.5
	2400	102	SD60240G		7075	13995	11.9	1.34	79.9
Type 33									
	400	152	ST6040G		1615	3215	6.3	1.35	20.1
	500	152	ST6050G		2018	4019	12.6	1.35	25.0
	600	152	ST6060G		2422	4823	3.9	1.35	29.4
	700	152	ST6070G		2825	5627	9.8	1.35	33.9
	800	152	ST6080G		3229	6431	5.9	1.35	38.4



600

HEIGHT 600 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
	900	152		ST6090G	3633	7235	9.8	1.35	42.8
	1000	152		ST60100G	4036	8039	7.8	1.35	47.3
	1100	152		ST60110G	4440	8843	9.8	1.35	51.8
	1200	152		ST60120G	4844	9646	9.8	1.35	56.3
	1400	152		ST60140G	5651	11254	10.8	1.35	65.2
	1600	152		ST60160G	6458	12862	11.8	1.35	74.2
	1800	152		ST60180G	7266	14470	14.0	1.35	83.1
	2000	152		ST60200G	8073	16077	15.7	1.35	100.4
	2300	152		ST60230G	9127	18120	9.8	1.35	105.5



750

HEIGHT 750 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
Type 11									
	300	62	SS7530G		--	--	1.2	1.31	7.0
	400	60	SS7540GP	SS7540G	857,	1679,	9.6	1.31	9.0
	500	60	SS7550GP	SS7550G	1071,	2098,	2.0	1.31	11.2
	600	60	SS7560GP	SS7560G	1286,	2518,	3.0	1.31	13.4
	700	60	SS7570GP	SS7570G	1500,	2938,	4.0	1.31	15.7
	800	60	SS7580GP	SS7580G	1714,	3357,	3.1	1.31	18.8
	900	60	SS7590GP	SS7590G	1928,	3777,	3.5	1.31	21.8
	1000	60	SS75100GP	SS75100G	2143,	4197,	3.9	1.31	23.5
	1200	60	SS75120GP	SS75120G	2571,	5036,	4.6	1.31	28.2
	1400	60	SS75140GP	SS75140G	3000,	5875,	5.4	1.31	32.9
	1600	60	SS75160GP	SS75160G	3428,	6715,	6.2	1.31	37.6
Type 21									
	400	70	SX7540G		1111	2192	14.0	1.33	14.1
	500	70	SX7550G		1389	2740	6.6	1.33	17.6
	600	70	SX7560G		1666	3288	6.6	1.33	21.2
	700	70	SX7570G		1944	3836	6.6	1.33	23.9
	800	70	SX7580G		2222	4384	19.8	1.33	27.4
	900	70	SX7590G		2500	4932	19.8	1.33	31.8
	1000	70	SX75100G		2777	5480	7.8	1.33	34.2
	1200	70	SX75120G		3333	6576	8.3	1.33	42.4
	1400	70	SX75140G		3888	7672	8.3	1.33	49.4
	1600	70	SX75160G		4444	8767	7.0	1.33	56.5
Type 22									
	300	102	SD7530G		--	--	2.3	1.35	12.6
	400	102	SD7540GP	SD7540G	1411,	2805,	6.6	1.35	16.8



750

HEIGHT 750 mm	LENGTH	DEPTH	ITEM NO (LEFT)	ITEM NO (RIGHT)	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N- EXPONENT	WEIGHT (kg)
	500	102	SD7550GP	SD7550G	1764,	3506,	3.8	1.35	21.0
	600	102	SD7560GP	SD7560G	2117,	4207,	8.0	1.35	24.0
	700	102	SD7570GP	SD7570G	2470,	4908,	13.0	1.35	29.4
	800	102	SD7580GP	SD7580G	2822,	5609,	3.0	1.35	32.0
	900	102	SD7590GP	SD7590G	3175,	6310,	3.8	1.35	37.8
	1000	102	SD75100GP	SD75100G	3528,	7012,	7.6	1.35	0.0
	1200	102	SD75120GP	SD75120G	4234,	8414,	8.3	1.35	50.5
	1400	102	SD75140GP	SD75140G	4939,	9816,	8.3	1.35	58.9
	1600	102	SD75160GP	SD75160G	5645,	11219,	7.6	1.35	43.5
Type 33									
	400	152	ST7540G		1885	3757	22.5	1.35	27.8
	500	152	ST7550G		2356	4697	9.8	1.35	34.8
	600	152	ST7560G		2827	5636	9.8	1.35	41.7
	700	152	ST7570G		3298	6575	9.8	1.35	48.7
	800	152	ST7580G		3770	7515	29.4	1.35	55.6
	900	152	ST7590G		4241	8454	10.4	1.35	62.6
	1000	152	ST75100G		4712	9393	11.5	1.35	69.6
	1200	152	ST75120G		5654	11272	12.3	1.35	69.6
	1400	152	ST75140G		6597	13151	12.3	1.35	69.6



900

HEIGHT 900 mm	LENGTH	DEPTH	ITEM NO	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N-EXPONENT	WEIGHT (kg)
Type 33								
	400	152	ST9040G	2777	4449	12.3	1.36	37.9
	500	152	ST9050G	3472	5562	12.3	1.36	47.3
	600	152	ST9060G	4166	6674	12.3	1.36	56.8
	700	152	ST9070G	4860	7786	6.6	1.36	66.3
	800	152	ST9080G	5555	8898	8.3	1.36	75.8
	900	152	ST9090G	6249	10011	9.9	1.36	85.2
	1000	152	ST90100G	6943	11123	11.6	1.36	94.7
	1200	152	ST90120G	8332	13348	12.0	1.36	113.6
	1400	152	ST90140G	9721	15572	13.3	1.36	132.6