



## Data sheet

2026-08-16

# Select Compact

Myson Select Compact is a prime traditional panel radiator



- ✓ High heat output
- ✓ Lightweight
- ✓ 4-tap connections
- ✓ Top grille & side panels standard
- ✓ Eco-friendly

Myson **Select Compact** is the ultimate in radiator design. It uses a 33mm pitch which our years of manufacturing expertise and research have established to be the optimum design for a Compact radiator. The Select Compact delivers impressive outputs whilst using a low water temperature, and is available in four types; single convector, double convector, double panel extra, and triple convector, all with factory fitted top grille and side panels as standard. It is lightweight and uses less steel for a lower carbon footprint.



### Area of application

The Select Compact is ideal for 2-pipe pumped indirect domestic and commercial heating applications. It features a 33mm pitch for optimal design, impressive heat output at low water content, lightweight construction using 33% less steel, and is available in 222 sizes with 4-tap connections.

### Sizing

For selecting or calculating the thermal heat power output, please use our design service. For quick selection, use our brochure.

### Usage

Install the Select Compact radiator with the appropriate radiator valves or thermostatic radiator valves for room temperature control. Ensure all connections are secure and that the system is fully bled of air. Check for any

potential leaks and verify that the radiator is heating evenly. Regular maintenance includes cleaning the grill and panels to prevent dust buildup and checking the system pressure. Ensure maximum safety by keeping the radiators clear of obstructions and avoid covering them to maintain optimal performance.

### AMA Text

The Select Compact radiator is constructed with high-grade materials and designed for optimal efficiency. It features a 33mm pitch, maximizing heat output while minimizing water and steel use. This radiator is suitable for 2-pipe pumped indirect systems and comes in single, double, double panel extra, and triple convector types. The range includes 222 sizes with 4-tap connections, ensuring a suitable fit for any space. Factory-fitted top grills and side panels come standard. The Select Compact complies with BS EN 442 and holds the BS Kitemark, offering a 10-year warranty for peace of mind.



# Specifications

| PROPERTIES                                            | UNIT | VALUES          |
|-------------------------------------------------------|------|-----------------|
| ETIM Class                                            |      | EC011022        |
| Material                                              |      | Steel           |
| Type                                                  |      | 11, 21, 22, 33  |
| Surface structure                                     |      | Profiled        |
| Max working pressure                                  | bar  | 8               |
| Number of standard connections                        |      | 4               |
| Heat output according to recognized EN 442 laboratory |      | Yes             |
| Max. Operating Temperature                            | °C   | 110             |
| Standard color                                        |      | Yes             |
| Color                                                 |      | White           |
| RAL number                                            |      | 9016            |
| Grill/Cover plate                                     |      | Yes             |
| Grill/Cover plate                                     |      | Yes             |
| Gloss value                                           |      | Glossy          |
| Thread dimension (inch)                               |      | 1/2 inch        |
| Thread connection                                     |      | Internal thread |
| With single-point connection                          |      | Yes             |
| With air vent connection                              |      | Yes             |
| With air valve/vent                                   |      | Yes             |
| With drain option                                     |      | Yes             |



# Documents

| DOCUMENTS                                | DOCUMENT TYPE | LINK                                                                                                                                                                                                                |
|------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Myson Complete Solutions - Full Brochure | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b">https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b</a> |
| Myson Panel Radiators - range brochure   | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_c47ba35e-7d74-4e42-8f64-965cfeec973c">https://asset.productmarketingcloud.com/api/assetstorage/3577_c47ba35e-7d74-4e42-8f64-965cfeec973c</a> |
| Product Warranty                         | Warranty      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab">https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab</a> |
| Select Compact Connection Options        | Installation  | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_3ba424c1-a325-43eb-8f23-5115c6c90420">https://asset.productmarketingcloud.com/api/assetstorage/3577_3ba424c1-a325-43eb-8f23-5115c6c90420</a> |






# Resources




ProductImage - Select Compact



ProductImage - Select Compact

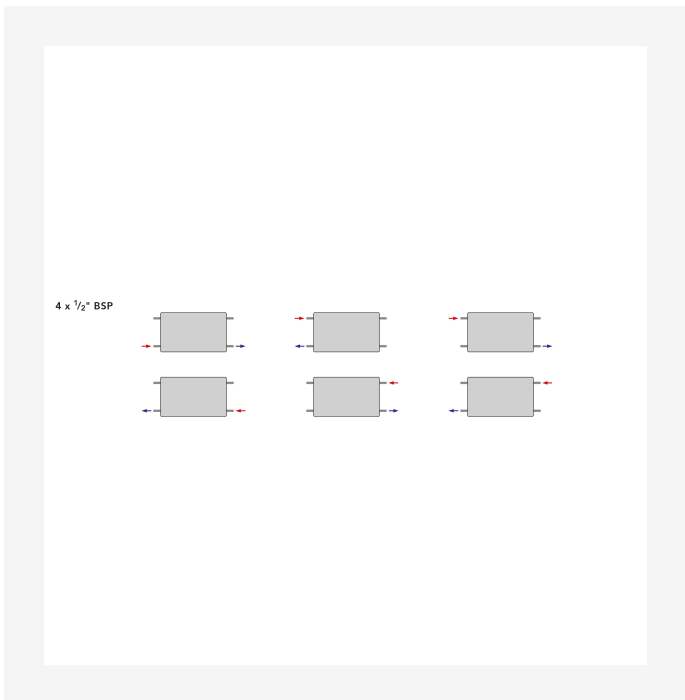


Installation - Select Compact Connection Options

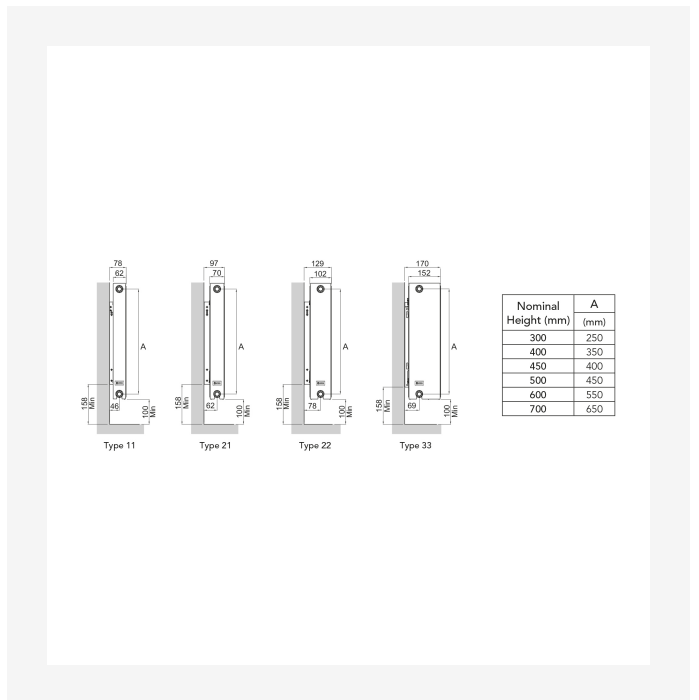

DimensionalDrawing - Select Compact Mounting Positions and Dimensions



# Resources

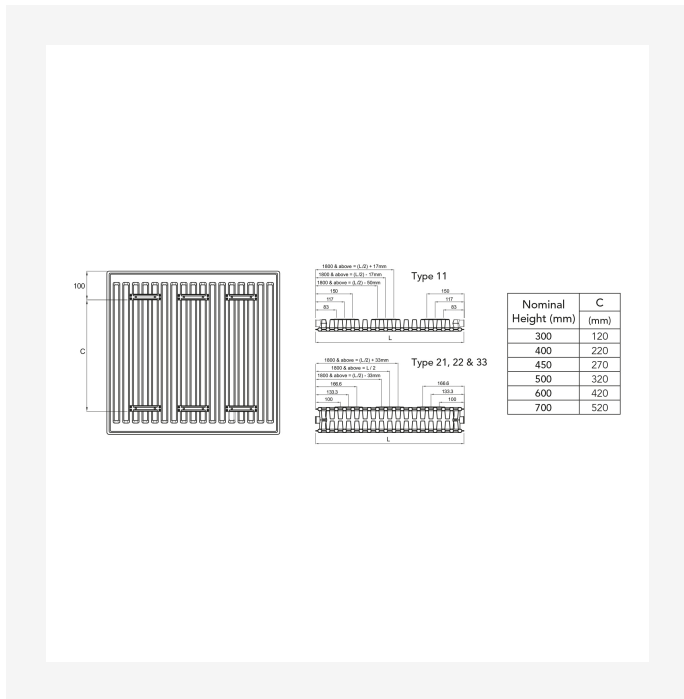

Dimensional Drawing - Select Compact Bracket Positions and Dimensions



## Related products



Matchmate



Vertical



Finesse



Matchmaster



Matchmaster PF90



Rio Compact PLUS



Rio Plan PLUS



Rio Linea PLUS



Decorative TRV Valves



Decorative Modern Valves



Decorative TRV Valve Pack



Decorative Slimline Valves



## Related products



**Decorative Traditional  
Valves**




**Myson Plus Manual Valves**



**Myson Plus Radiator Packs**



**Myson Plus TRV Valves**



**TRV2**



**TRV2 Radiator Packs**



300

| HEIGHT<br>300 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
| Type 11          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 60    | SS3040GP          | SS3040G            | 386,                  | 745,                  | 4.5           | 1.30           | 3.5            |
|                  | 600    | 60    | SS3060GP          | SS3060G            | 576,                  | 1119,                 | 13.5          | 1.30           | 6.0            |
|                  | 1000   | 60    | SS30100GP         | SS30100G           | 958,                  | 1863,                 | 1.4           | 1.30           | 9.3            |
|                  | 1400   | 60    | SS30140GP         | SS30140G           | 1341,                 | 2607,                 | 1.7           | 1.30           | 12.8           |
|                  | 1800   | 60    | SS30180G          |                    | 1726                  | 3354                  | 2.4           | 1.30           | 15.8           |
|                  | 2000   | 60    | SS30200GP         | SS30200G           | 1917,                 | 3726,                 | 2.7           | 1.30           | 17.3           |
|                  | 2400   | 60    | SS30240G          |                    | 2300                  | 4470                  | 2.7           | 1.30           | 20.4           |
| Type 21          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 600    | 70    | SX3060G           |                    | 811                   | 1558                  | 12.9          | 1.28           | 8.4            |
|                  | 1000   | 70    | SX30100G          |                    | 1351                  | 2597                  | 3.4           | 1.28           | 14.0           |
|                  | 1400   | 70    | SX30140G          |                    | 1892                  | 3635                  | 3.3           | 1.28           | 19.6           |
|                  | 1800   | 70    | SX30180G          |                    | 2432                  | 4674                  | 3.4           | 1.28           | 25.2           |
| Type 22          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 600    | 102   | SD3060GP          | SD3060G            | 1007,                 | 1967,                 | 1.4           | 1.31           | 11.0           |
|                  | 800    | 102   | SD3080GP          | SD3080G            | 1343,                 | 2623,                 | 2.0           | 1.31           | 13.0           |
|                  | 1000   | 102   | SD30100GP         | SD30100G           | 1679,                 | 3279,                 | 2.7           | 1.31           | 16.3           |
|                  | 1400   | 102   | SD30140GP         | SD30140G           | 2350,                 | 4591,                 | 3.4           | 1.31           | 22.8           |
|                  | 1800   | 102   | SD30180GP         | SD30180G           | 3022,                 | 5902,                 | 4.8           | 1.31           | 29.3           |
|                  | 2000   | 102   | SD30200GP         | SD30200G           | 3357,                 | 6558,                 | 3.4           | 1.31           | 32.6           |
|                  | 2400   | 102   | SD30240G          |                    | 4029                  | 7869                  | 0.0           | 1.31           | 39.1           |
| Type 33          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 600    | 152   | ST3060G           |                    | 1408                  | 2758                  | 19.3          | 1.31           | 14.7           |
|                  | 1000   | 152   | ST30100G          |                    | 2347                  | 4596                  | 3.6           | 1.31           | 24.5           |
|                  | 1200   | 152   | ST30120G          |                    | 2817                  | 5515                  | 5.1           | 1.31           | 29.4           |



# 300

| HEIGHT<br>300 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
|                  | 1400   | 152   | ST30140G          |                    | 3286                  | 6434                  | 5.1           | 1.31           | 34.3           |
|                  | 1800   | 152   | ST30180G          |                    | 4225                  | 8273                  | 5.1           | 1.31           | 44.1           |
|                  | 2000   | 152   | ST30200G          |                    | 4695                  | 9192                  | 5.1           | 1.31           | 49.0           |



400

| HEIGHT<br>400 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
| Type 11          | 500    | 60    | SS4050GP          | SS4050G            | 625,                  | 1215,                 | 1.7           | 1.30           | 6.7            |
|                  | 600    | 60    | SS4060GP          | SS4060G            | 749,                  | 1457,                 | 5.1           | 1.30           | 7.7            |
|                  | 700    | 60    | SS4070GP          | SS4070G            | 874,                  | 1699,                 | 2.2           | 1.30           | 8.9            |
|                  | 800    | 60    | SS4080GP          | SS4080G            | 998,                  | 1941,                 | 1.3           | 1.30           | 9.8            |
|                  | 900    | 60    | SS4090GP          | SS4090G            | 1123,                 | 2184,                 | 2.2           | 1.30           | 11.0           |
|                  | 1000   | 60    | SS40100GP         | SS40100G           | 1247,                 | 2426,                 | 1.8           | 1.30           | 11.9           |
|                  | 1100   | 60    | SS40110GP         | SS40110G           | 1372,                 | 2668,                 | 2.2           | 1.30           | 13.3           |
|                  | 1200   | 60    | SS40120GP         | SS40120G           | 1496,                 | 2910,                 | 2.2           | 1.30           | 14.1           |
|                  | 1300   | 60    | SS40130GP         | SS40130G           | 1621,                 | 3153,                 | 2.2           | 1.30           | 15.3           |
|                  | 1400   | 60    | SS40140GP         | SS40140G           | 1746,                 | 3395,                 | 2.4           | 1.30           | 16.1           |
|                  | 1600   | 60    | SS40160GP         | SS40160G           | 1996,                 | 3883,                 | 2.2           | 1.30           | 18.7           |
|                  | 1800   | 60    | SS40180GP         | SS40180G           | 2246,                 | 4367,                 | 3.1           | 1.30           | 20.9           |
| Type 21          | 500    | 70    | SX4050G           |                    | 848                   | 1643                  | 8.8           | 1.29           | 10.3           |
|                  | 600    | 70    | SX4060G           |                    | 1017                  | 1971                  | 10.2          | 1.29           | 11.3           |
|                  | 700    | 70    | SX4070G           |                    | 1187                  | 2300                  | 1.8           | 1.29           | 13.1           |
|                  | 800    | 70    | SX4080G           |                    | 1357                  | 2629                  | 2.2           | 1.29           | 15.0           |
|                  | 900    | 70    | SX4090G           |                    | 1526                  | 2957                  | 2.6           | 1.29           | 16.9           |
|                  | 1000   | 70    | SX40100G          |                    | 1696                  | 3286                  | 3.1           | 1.29           | 18.8           |
|                  | 1100   | 70    | SX40110G          |                    | 1865                  | 3614                  | 3.5           | 1.29           | 20.6           |
|                  | 1200   | 70    | SX40120G          |                    | 2035                  | 3943                  | 3.9           | 1.29           | 22.5           |
|                  | 1300   | 70    | SX40130G          |                    | 2204                  | 4271                  | 4.5           | 1.29           | 24.4           |
|                  | 1400   | 70    | SX40140G          |                    | 2374                  | 4600                  | 4.5           | 1.29           | 26.3           |
|                  | 1600   | 70    | SX40160G          |                    | 2713                  | 5257                  | 5.4           | 1.29           | 30.0           |
|                  | 1800   | 70    | SX40180G          |                    | 3052                  | 5914                  | 6.3           | 1.29           | 33.8           |



400

| HEIGHT<br>400 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
| Type 22          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 500    | 102   | SD4050GP          | SD4050G            | 1063,                 | 2083,                 | 3.4           | 1.32           | 11.0           |
|                  | 600    | 102   | SD4060GP          | SD4060G            | 1275,                 | 2500,                 | 1.8           | 1.32           | 13.2           |
|                  | 700    | 102   | SD4070GP          | SD4070G            | 1488,                 | 2916,                 | 2.3           | 1.32           | 15.4           |
|                  | 800    | 102   | SD4080GP          | SD4080G            | 1701,                 | 3333,                 | 2.7           | 1.32           | 17.6           |
|                  | 900    | 102   | SD4090GP          | SD4090G            | 1913,                 | 3749,                 | 3.1           | 1.32           | 19.8           |
|                  | 1000   | 102   | SD40100GP         | SD40100G           | 2126,                 | 4166,                 | 3.6           | 1.32           | 22.0           |
|                  | 1100   | 102   | SD40110GP         | SD40110G           | 2338,                 | 4583,                 | 4.5           | 1.32           | 24.2           |
|                  | 1200   | 102   | SD40120GP         | SD40120G           | 2551,                 | 4999,                 | 4.5           | 1.32           | 26.4           |
|                  | 1300   | 102   | SD40130GP         | SD40130G           | 2763,                 | 5416,                 | 4.5           | 1.32           | 28.6           |
|                  | 1400   | 102   | SD40140GP         | SD40140G           | 2976,                 | 5832,                 | 5.0           | 1.32           | 30.4           |
|                  | 1600   | 102   | SD40160GP         | SD40160G           | 3401,                 | 6666,                 | 4.5           | 1.32           | 34.8           |
|                  | 1800   | 102   | SD40180GP         | SD40180G           | 3826,                 | 7499,                 | 6.3           | 1.32           | 39.4           |





500

| HEIGHT<br>500 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
| Type 11          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 60    | SS5040GP          | SS5040G            | 608,                  | 1184,                 | 4.0           | 1.31           | 7.0            |
|                  | 500    | 60    | SS5050GP          | SS5050G            | 761,                  | 1481,                 | 5.0           | 1.31           | 8.4            |
|                  | 600    | 60    | SS5060GP          | SS5060G            | 914,                  | 1778,                 | 7.5           | 1.31           | 9.7            |
|                  | 700    | 60    | SS5070GP          | SS5070G            | 1066,                 | 2074,                 | 11            | 1.31           | 11.1           |
|                  | 800    | 60    | SS5080GP          | SS5080G            | 1217,                 | 2368,                 | 14            | 1.31           | 12.3           |
|                  | 900    | 60    | SS5090GP          | SS5090G            | 1369,                 | 2665,                 | 16            | 1.31           | 13.7           |
|                  | 1000   | 60    | SS50100GP         | SS50100G           | 1522,                 | 2962,                 | 19            | 1.31           | 14.9           |
|                  | 1100   | 60    | SS50110GP         | SS50110G           | 1674,                 | 3258,                 | 2.2           | 1.31           | 16.1           |
|                  | 1200   | 60    | SS50120GP         | SS50120G           | 1827,                 | 3555,                 | 2.4           | 1.31           | 17.9           |
|                  | 1300   | 60    | SS50130GP         | SS50130G           | 1979,                 | 3849,                 | 2.7           | 1.31           | 19.3           |
|                  | 1400   | 60    | SS50140GP         | SS50140G           | 2130,                 | 4146,                 | 2.7           | 1.31           | 20.6           |
|                  | 1500   | 60    | SS50150GP         | SS50150G           | 2283,                 | 4442,                 | 3.0           | 1.31           | 22.0           |
|                  | 1600   | 60    | SS50160GP         | SS50160G           | 2435,                 | 4739,                 | 3.2           | 1.31           | 23.7           |
|                  | 1800   | 60    | SS50180GP         | SS50180G           | 2739,                 | 5330,                 | 2.7           | 1.31           | 26.3           |
|                  | 2000   | 60    | SS50200GP         | SS50200G           | 3044,                 | 5923,                 | 2.7           | 1.31           | 28.9           |
|                  | 2400   | 60    |                   | SS50240G           | 3652                  | 7107                  | 2.7           | 1.31           | 34.0           |
| Type 21          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 70    |                   | SX5040G            | 808                   | 1578                  | 8.0           | 1.31           | 10.6           |
|                  | 500    | 70    |                   | SX5050G            | 1010                  | 1972                  | 10.0          | 1.31           | 11.8           |
|                  | 600    | 70    |                   | SX5060G            | 1212                  | 2367                  | 15.0          | 1.31           | 14.1           |
|                  | 700    | 70    |                   | SX5070G            | 1414                  | 2761                  | 2.2           | 1.31           | 16.5           |
|                  | 800    | 70    |                   | SX5080G            | 1616                  | 3155                  | 2.7           | 1.31           | 18.8           |
|                  | 900    | 70    |                   | SX5090G            | 1818                  | 3550                  | 3.3           | 1.31           | 21.2           |
|                  | 1000   | 70    |                   | SX50100G           | 2020                  | 3944                  | 3.8           | 1.31           | 23.5           |
|                  | 1200   | 70    |                   | SX50120G           | 2424                  | 4733                  | 5.0           | 1.31           | 28.2           |



500

| HEIGHT<br>500 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
|                  | 1400   | 70    | SX50140G          |                    | 2828                  | 5522                  | 5.5           | 1.31           | 32.9           |
|                  | 1600   | 70    | SX50160G          |                    | 3232                  | 6311                  | 6.6           | 1.31           | 37.6           |
|                  | 1800   | 70    | SX50180G          |                    | 3636                  | 7100                  | 7.7           | 1.31           | 42.4           |
| Type 22          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 102   | SD5040GP          | SD5040G            | 1018,                 | 2006,                 | 9.0           | 1.33           | 11.1           |
|                  | 500    | 102   | SD5050GP          | SD5050G            | 1273,                 | 2508,                 | 13.0          | 1.33           | 13.8           |
|                  | 600    | 102   | SD5060GP          | SD5060G            | 1527,                 | 3009,                 | 2.2           | 1.33           | 16.6           |
|                  | 700    | 102   | SD5070GP          | SD5070G            | 1782,                 | 3511,                 | 2.8           | 1.33           | 19.4           |
|                  | 800    | 102   | SD5080GP          | SD5080G            | 2036,                 | 4013,                 | 3.3           | 1.33           | 22.2           |
|                  | 900    | 102   | SD5090GP          | SD5090G            | 2291,                 | 4514,                 | 3.9           | 1.33           | 24.9           |
|                  | 1000   | 102   | SD50100GP         | SD50100G           | 2545,                 | 5016,                 | 4.4           | 1.33           | 27.7           |
|                  | 1100   | 102   | SD50110GP         | SD50110G           | 2800,                 | 5517,                 | 5.5           | 1.33           | 30.3           |
|                  | 1200   | 102   | SD50120GP         | SD50120G           | 3054,                 | 6019,                 | 5.5           | 1.33           | 33.1           |
|                  | 1300   | 102   | SD50130GP         | SD50130G           | 3309,                 | 6520,                 | 5.5           | 1.33           | 35.8           |
|                  | 1400   | 102   | SD50140GP         | SD50140G           | 3563,                 | 7022,                 | 5.5           | 1.33           | 38.5           |
|                  | 1500   | 102   | SD50150GP         | SD50150G           | 3818,                 | 7523,                 | 5.5           | 1.33           | 41.3           |
|                  | 1600   | 102   | SD50160GP         | SD50160G           | 4073,                 | 8025,                 | 5.5           | 1.33           | 44.2           |
|                  | 1800   | 102   | SD50180GP         | SD50180G           | 4582,                 | 9028,                 | 7.7           | 1.33           | 49.6           |
|                  | 2000   | 102   | SD50200GP         | SD50200G           | 5091,                 | 10031,                | 8.3           | 1.33           | 55.1           |
|                  | 2400   | 102   | SD50240G          |                    | 6109                  | 12038                 | 9.9           | 1.33           | 66.1           |
| Type 33          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 600    | 152   | ST5060G           |                    | 2105                  | 4166                  | 19.5          | 1.34           | 25.0           |
|                  | 700    | 152   | ST5070G           |                    | 2455                  | 4860                  | 3.3           | 1.34           | 29.1           |
|                  | 800    | 152   | ST5080G           |                    | 2806                  | 5555                  | 4.1           | 1.34           | 33.3           |
|                  | 900    | 152   | ST5090G           |                    | 3157                  | 6249                  | 4.9           | 1.34           | 37.5           |
|                  | 1000   | 152   | ST50100G          |                    | 3508                  | 6943                  | 5.8           | 1.34           | 41.6           |



# 500

| HEIGHT<br>500 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
|                  | 1100   | 152   |                   | ST50110G           | 3858                  | 7638                  | 6.6           | 1.34           | 45.8           |
|                  | 1200   | 152   |                   | ST50120G           | 4209                  | 8332                  | 7.4           | 1.34           | 50.0           |
|                  | 1400   | 152   |                   | ST50140G           | 4911                  | 9721                  | 9.0           | 1.34           | 58.3           |
|                  | 1600   | 152   |                   | ST50160G           | 5612                  | 11109                 | 9.8           | 1.34           | 66.6           |
|                  | 1800   | 152   |                   | ST50180G           | 6314                  | 12498                 | 11.5          | 1.34           | 74.9           |
|                  | 2000   | 152   |                   | ST50200G           | 7015                  | 13887                 | 8.2           | 1.34           | 83.3           |
|                  | 2300   | 152   |                   | ST50230G           | 8067                  | 15970                 | 8.2           | 1.34           | 95.7           |



600

| HEIGHT<br>600 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
| Type 11          | 400    | 60    | SS6040GP          | SS6040G            | 711,                  | 1389,                 | 2.4           | 1.31           | 8.3            |
|                  | 500    | 60    | SS6050GP          | SS6050G            | 890,                  | 1737,                 | 5.4           | 1.31           | 9.9            |
|                  | 600    | 60    | SS6060GP          | SS6060G            | 1068,                 | 2085,                 | 1.0           | 1.31           | 11.5           |
|                  | 700    | 60    | SS6070GP          | SS6070G            | 1246,                 | 2433,                 | 2.0           | 1.31           | 13.1           |
|                  | 800    | 60    | SS6080GP          | SS6080G            | 1423,                 | 2777,                 | 2.0           | 1.31           | 14.8           |
|                  | 900    | 60    | SS6090GP          | SS6090G            | 1601,                 | 3125,                 | 2.0           | 1.31           | 16.5           |
|                  | 1000   | 60    | SS60100GP         | SS60100G           | 1779,                 | 3473,                 | 2.0           | 1.31           | 18.2           |
|                  | 1100   | 60    | SS60110GP         | SS60110G           | 1957,                 | 3821,                 | 3.0           | 1.31           | 19.4           |
|                  | 1200   | 60    | SS60120GP         | SS60120G           | 2136,                 | 4169,                 | 3.0           | 1.31           | 21.3           |
|                  | 1300   | 60    | SS60130GP         | SS60130G           | 2312,                 | 4514,                 | 3.2           | 1.31           | 23.0           |
|                  | 1400   | 60    | SS60140GP         | SS60140G           | 2491,                 | 4862,                 | 3.8           | 1.31           | 24.6           |
|                  | 1600   | 60    | SS60160GP         | SS60160G           | 2847,                 | 5558,                 | 4.0           | 1.31           | 28.3           |
|                  | 1800   | 60    | SS60180GP         | SS60180G           | 3202,                 | 6251,                 | 4.5           | 1.31           | 31.4           |
|                  | 2000   | 60    | SS60200GP         | SS60200G           | 3558,                 | 6947,                 | 5.0           | 1.31           | 34.5           |
|                  | 2400   | 60    | SS60240G          |                    | 4270                  | 7643                  | 5.8           | 1.31           | 40.7           |
| Type 21          | 400    | 70    | SX6040G           |                    | 932                   | 1829                  | 4.3           | 1.32           | 11.3           |
|                  | 500    | 70    | SX6050G           |                    | 1165                  | 2286                  | 9.8           | 1.32           | 14.2           |
|                  | 600    | 70    | SX6060G           |                    | 1398                  | 2743                  | 6.6           | 1.32           | 17.0           |
|                  | 700    | 70    | SX6070G           |                    | 1631                  | 3200                  | 6.6           | 1.32           | 19.8           |
|                  | 800    | 70    | SX6080G           |                    | 1864                  | 3658                  | 6.6           | 1.32           | 22.6           |
|                  | 900    | 70    | SX6090G           |                    | 2097                  | 4115                  | 6.6           | 1.32           | 25.5           |
|                  | 1000   | 70    | SX60100G          |                    | 2330                  | 4572                  | 6.6           | 1.32           | 28.3           |
|                  | 1100   | 70    | SX60110G          |                    | 2563                  | 5029                  | 6.6           | 1.32           | 31.1           |
|                  | 1200   | 70    | SX60120G          |                    | 2796                  | 5486                  | 6.6           | 1.32           | 34.0           |



600

| HEIGHT<br>600 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
|                  | 1300   | 70    | SX60130G          |                    | 3030                  | 5944                  | 6.5           | 1.32           | 36.6           |
|                  | 1400   | 70    | SX60140G          |                    | 3263                  | 6401                  | 7.2           | 1.32           | 39.4           |
|                  | 1600   | 70    | SX60160G          |                    | 3729                  | 7315                  | 6.6           | 1.32           | 45.3           |
|                  | 1800   | 70    | SX60180G          |                    | 4195                  | 8230                  | 9.2           | 1.32           | 50.9           |
| Type 22          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 102   | SD6040GP          | SD6040G            | 1179,                 | 2332,                 | 6.1           | 1.34           | 13.4           |
|                  | 500    | 102   | SD6050GP          | SD6050G            | 1474,                 | 2916,                 | 18.3          | 1.34           | 16.7           |
|                  | 600    | 102   | SD6060GP          | SD6060G            | 1769,                 | 3499,                 | 6.6           | 1.34           | 20.0           |
|                  | 700    | 102   | SD6070GP          | SD6070G            | 2064,                 | 4082,                 | 6.6           | 1.34           | 23.4           |
|                  | 800    | 102   | SD6080GP          | SD6080G            | 2358,                 | 4665,                 | 6.6           | 1.34           | 26.7           |
|                  | 900    | 102   | SD6090GP          | SD6090G            | 2653,                 | 5248,                 | 6.6           | 1.34           | 30.1           |
|                  | 1000   | 102   | SD60100GP         | SD60100G           | 2948,                 | 5831,                 | 6.6           | 1.34           | 33.7           |
|                  | 1100   | 102   | SD60110GP         | SD60110G           | 3243,                 | 6414,                 | 5.9           | 1.34           | 36.7           |
|                  | 1200   | 102   | SD60120GP         | SD60120G           | 3538,                 | 6997,                 | 6.0           | 1.34           | 40.1           |
|                  | 1300   | 102   | SD60130GP         | SD60130G           | 3832,                 | 7580,                 | 6.6           | 1.34           | 43.2           |
|                  | 1400   | 102   | SD60140GP         | SD60140G           | 4127,                 | 8164,                 | 7.9           | 1.34           | 46.2           |
|                  | 1600   | 102   | SD60160GP         | SD60160G           | 4717,                 | 9330,                 | 6.6           | 1.34           | 53.1           |
|                  | 1800   | 102   | SD60180GP         | SD60180G           | 5306,                 | 10496,                | 6.6           | 1.34           | 59.8           |
|                  | 2000   | 102   | SD60200GP         | SD60200G           | 5896,                 | 11662,                | 10.6          | 1.34           | 66.5           |
|                  | 2400   | 102   | SD60240G          |                    | 7075                  | 13995                 | 11.9          | 1.34           | 79.9           |
| Type 33          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 152   | ST6040G           |                    | 1615                  | 3215                  | 6.3           | 1.35           | 20.1           |
|                  | 500    | 152   | ST6050G           |                    | 2018                  | 4019                  | 12.6          | 1.35           | 24.9           |
|                  | 600    | 152   | ST6060G           |                    | 2422                  | 4823                  | 3.9           | 1.35           | 29.4           |
|                  | 700    | 152   | ST6070G           |                    | 2825                  | 5627                  | 9.8           | 1.35           | 33.9           |
|                  | 800    | 152   | ST6080G           |                    | 3229                  | 6431                  | 5.9           | 1.35           | 38.4           |



# 600

| HEIGHT<br>600 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
|                  | 900    | 152   |                   | ST6090G            | 3633                  | 7235                  | 9.8           | 1.35           | 42.8           |
|                  | 1000   | 152   |                   | ST60100G           | 4036                  | 8039                  | 7.8           | 1.35           | 47.3           |
|                  | 1100   | 152   |                   | ST60110G           | 4440                  | 8843                  | 9.8           | 1.35           | 51.8           |
|                  | 1200   | 152   |                   | ST60120G           | 4844                  | 9646                  | 9.8           | 1.35           | 56.3           |
|                  | 1400   | 152   |                   | ST60140G           | 5651                  | 11254                 | 10.8          | 1.35           | 65.2           |
|                  | 1600   | 152   |                   | ST60160G           | 6458                  | 12862                 | 11.8          | 1.35           | 74.2           |
|                  | 1800   | 152   |                   | ST60180G           | 7266                  | 14470                 | 14.0          | 1.35           | 83.1           |
|                  | 2000   | 152   |                   | ST60200G           | 8073                  | 16077                 | 15.7          | 1.35           | 100.4          |
|                  | 2300   | 152   |                   | ST60230G           | 9127                  | 18120                 | 9.8           | 1.35           | 105.5          |



750

| HEIGHT<br>750 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
| Type 11          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 300    | 62    | SS7530G           |                    | --                    | --                    | 1.2           | 1.31           | 7.0            |
|                  | 400    | 60    | SS7540GP          | SS7540G            | 857,                  | 1679,                 | 9.6           | 1.31           | 9.0            |
|                  | 500    | 60    | SS7550GP          | SS7550G            | 1071,                 | 2098,                 | 2.0           | 1.31           | 11.2           |
|                  | 600    | 60    | SS7560GP          | SS7560G            | 1286,                 | 2518,                 | 3.0           | 1.31           | 13.4           |
|                  | 700    | 60    | SS7570GP          | SS7570G            | 1500,                 | 2938,                 | 4.0           | 1.31           | 15.7           |
|                  | 800    | 60    | SS7580GP          | SS7580G            | 1714,                 | 3357,                 | 3.1           | 1.31           | 18.8           |
|                  | 900    | 60    | SS7590GP          | SS7590G            | 1928,                 | 3777,                 | 3.5           | 1.31           | 21.8           |
|                  | 1000   | 60    | SS75100GP         | SS75100G           | 2143,                 | 4197,                 | 3.9           | 1.31           | 23.5           |
|                  | 1200   | 60    | SS75120GP         | SS75120G           | 2571,                 | 5036,                 | 4.6           | 1.31           | 28.2           |
|                  | 1400   | 60    | SS75140GP         | SS75140G           | 3000,                 | 5875,                 | 5.4           | 1.31           | 32.9           |
|                  | 1600   | 60    | SS75160GP         | SS75160G           | 3428,                 | 6715,                 | 6.2           | 1.31           | 37.6           |
| Type 21          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 70    | SX7540G           |                    | 1111                  | 2192                  | 14.0          | 1.33           | 14.1           |
|                  | 500    | 70    | SX7550G           |                    | 1389                  | 2740                  | 6.6           | 1.33           | 17.6           |
|                  | 600    | 70    | SX7560G           |                    | 1666                  | 3288                  | 6.6           | 1.33           | 21.2           |
|                  | 700    | 70    | SX7570G           |                    | 1944                  | 3836                  | 6.6           | 1.33           | 23.9           |
|                  | 800    | 70    | SX7580G           |                    | 2222                  | 4384                  | 19.8          | 1.33           | 27.4           |
|                  | 900    | 70    | SX7590G           |                    | 2500                  | 4932                  | 19.8          | 1.33           | 31.8           |
|                  | 1000   | 70    | SX75100G          |                    | 2777                  | 5480                  | 7.8           | 1.33           | 34.2           |
|                  | 1200   | 70    | SX75120G          |                    | 3333                  | 6576                  | 8.3           | 1.33           | 42.4           |
|                  | 1400   | 70    | SX75140G          |                    | 3888                  | 7672                  | 8.3           | 1.33           | 49.4           |
|                  | 1600   | 70    | SX75160G          |                    | 4444                  | 8767                  | 7.0           | 1.33           | 56.5           |
| Type 22          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 300    | 102   | SD7530G           |                    | --                    | --                    | 2.3           | 1.35           | 12.6           |
|                  | 400    | 102   | SD7540GP          | SD7540G            | 1411,                 | 2805,                 | 6.6           | 1.35           | 16.8           |



750

| HEIGHT<br>750 mm | LENGTH | DEPTH | ITEM NO<br>(LEFT) | ITEM NO<br>(RIGHT) | (Btu/H)<br>55/45/20°C | (Btu/H)<br>75/65/20°C | VOLUME<br>(l) | N-<br>EXPONENT | WEIGHT<br>(kg) |
|------------------|--------|-------|-------------------|--------------------|-----------------------|-----------------------|---------------|----------------|----------------|
|                  | 500    | 102   | SD7550GP          | SD7550G            | 1764,                 | 3506,                 | 3.8           | 1.35           | 21.0           |
|                  | 600    | 102   | SD7560GP          | SD7560G            | 2117,                 | 4207,                 | 8.0           | 1.35           | 24.0           |
|                  | 700    | 102   | SD7570GP          | SD7570G            | 2470,                 | 4908,                 | 13.0          | 1.35           | 29.4           |
|                  | 800    | 102   | SD7580GP          | SD7580G            | 2822,                 | 5609,                 | 3.0           | 1.35           | 32.0           |
|                  | 900    | 102   | SD7590GP          | SD7590G            | 3175,                 | 6310,                 | 3.8           | 1.35           | 37.8           |
|                  | 1000   | 102   | SD75100GP         | SD75100G           | 3528,                 | 7012,                 | 7.6           | 1.35           | 0.0            |
|                  | 1200   | 102   | SD75120GP         | SD75120G           | 4234,                 | 8414,                 | 8.3           | 1.35           | 50.5           |
|                  | 1400   | 102   | SD75140GP         | SD75140G           | 4939,                 | 9816,                 | 8.3           | 1.35           | 58.9           |
|                  | 1600   | 102   | SD75160GP         | SD75160G           | 5645,                 | 11219,                | 7.6           | 1.35           | 43.5           |
| Type 33          |        |       |                   |                    |                       |                       |               |                |                |
|                  | 400    | 152   | ST7540G           |                    | 1885                  | 3757                  | 22.5          | 1.35           | 27.8           |
|                  | 500    | 152   | ST7550G           |                    | 2356                  | 4697                  | 9.8           | 1.35           | 34.8           |
|                  | 600    | 152   | ST7560G           |                    | 2827                  | 5636                  | 9.8           | 1.35           | 41.7           |
|                  | 700    | 152   | ST7570G           |                    | 3298                  | 6575                  | 9.8           | 1.35           | 48.7           |
|                  | 800    | 152   | ST7580G           |                    | 3770                  | 7515                  | 29.4          | 1.35           | 55.6           |
|                  | 900    | 152   | ST7590G           |                    | 4241                  | 8454                  | 10.4          | 1.35           | 62.6           |
|                  | 1000   | 152   | ST75100G          |                    | 4712                  | 9393                  | 11.5          | 1.35           | 69.6           |
|                  | 1200   | 152   | ST75120G          |                    | 5654                  | 11272                 | 12.3          | 1.35           | 69.6           |
|                  | 1400   | 152   | ST75140G          |                    | 6597                  | 13151                 | 12.3          | 1.35           | 69.6           |





# 900

| HEIGHT 900 mm | LENGTH | DEPTH | ITEM NO  | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---------------|--------|-------|----------|--------------------|--------------------|------------|------------|-------------|
| Type 33       |        |       |          |                    |                    |            |            |             |
|               | 400    | 152   | ST9040G  | 2777               | 4449               | 12.3       | 1.36       | 37.9        |
|               | 500    | 152   | ST9050G  | 3472               | 5562               | 12.3       | 1.36       | 47.3        |
|               | 600    | 152   | ST9060G  | 4166               | 6674               | 12.3       | 1.36       | 56.8        |
|               | 700    | 152   | ST9070G  | 4860               | 7786               | 6.6        | 1.36       | 66.3        |
|               | 800    | 152   | ST9080G  | 5555               | 8898               | 8.3        | 1.36       | 75.8        |
|               | 900    | 152   | ST9090G  | 6249               | 10011              | 9.9        | 1.36       | 85.2        |
|               | 1000   | 152   | ST90100G | 6943               | 11123              | 11.6       | 1.36       | 94.7        |
|               | 1200   | 152   | ST90120G | 8332               | 13348              | 12.0       | 1.36       | 113.6       |
|               | 1400   | 152   | ST90140G | 9721               | 15572              | 13.3       | 1.36       | 132.6       |