**Data sheet**
2026-10-23

# Select Compact

Myson Select Compact is a prime traditional panel radiator



- High heat output
- Lightweight
- 4-tap connections
- Top grille & side panels standard
- Eco-friendly

Myson **Select Compact** is the ultimate in radiator design. It uses a 33mm pitch which our years of manufacturing expertise and research have established to be the optimum design for a Compact radiator. The Select Compact delivers impressive outputs whilst using a low water temperature, and is available in four types; single convector, double convector, double panel extra, and triple convector, all with factory fitted top grille and side panels as standard. It is lightweight and uses less steel for a lower carbon footprint.

**Area of application**
The Select Compact is ideal for 2-pipe pumped indirect domestic and commercial heating applications. It features a 33mm pitch for optimal design, impressive heat output at low water content, lightweight construction using 33% less steel, and is available in 222 sizes with 4-tap connections.

**Sizing**
For selecting or calculating the thermal heat power output, please use our design service. For quick selection, use our brochure.

**Usage**
Install the Select Compact radiator with the appropriate radiator valves or thermostatic radiator valves for room temperature control. Ensure all connections are secure and that the system is fully bled of air. Check for any potential leaks and verify that the radiator is heating evenly. Regular maintenance includes cleaning the grill and panels to prevent dust buildup and checking the system pressure. Ensure maximum safety by keeping the radiators clear of obstructions and avoid covering them to maintain optimal performance.

**AMA Text**
The Select Compact radiator is constructed with high-grade materials and designed for optimal efficiency. It features a 33mm pitch, maximizing heat output while minimizing water and steel use. This radiator is suitable for 2-pipe pumped indirect systems and comes in single, double, double panel extra, and triple convector types. The range includes 222 sizes with 4-tap connections, ensuring a suitable fit for any space. Factory-fitted top grills and side panels come standard. The Select Compact complies with BS EN 442 and holds the BS Kitemark, offering a 10-year warranty for peace of mind.

# Specifications

| PROPERTIES | UNIT | VALUES |
|---|---|---|
| ETIM Class | | EC011022 |
| Material | | Steel |
| Type | | 11, 21, 22, 33 |
| Surface structure | | Profiled |
| Max working pressure | bar | 8 |
| Number of standard connections | | 4 |
| Heat output according to recognized EN 442 laboratory | | Yes |
| Max. Operating Temperature | °C | 110 |
| Standard color | | Yes |
| Color | | White |
| RAL number | | 9016 |
| Grill/Cover plate | | Yes |
| Grill/Cover plate | | Yes |
| Gloss value | | Glossy |
| Thread dimension (inch) | | 1/2 inch |
| Thread connection | | Internal thread |
| With single-point connection | | Yes |
| With air vent connection | | Yes |
| With air valve/vent | | Yes |
| With drain option | | Yes |

# Documents

| DOCUMENTS | DOCUMENT TYPE | LINK |
|---|---|---|
| Myson Complete Solutions - Full Brochure | Brochure | https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b |
| Myson Panel Radiators - range brochure | Brochure | https://asset.productmarketingcloud.com/api/assetstorage/3577_c47ba35e-7d74-4e42-8f64-965cfeec973c |
| Product Warranty | Warranty | https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab |
| Select Compact Connection Options | Installation | https://asset.productmarketingcloud.com/api/assetstorage/3577_3ba424c1-a325-43eb-8f23-5115c6c90420 |


# Resources




ProductImage - Select Compact



ProductImage - Select Compact

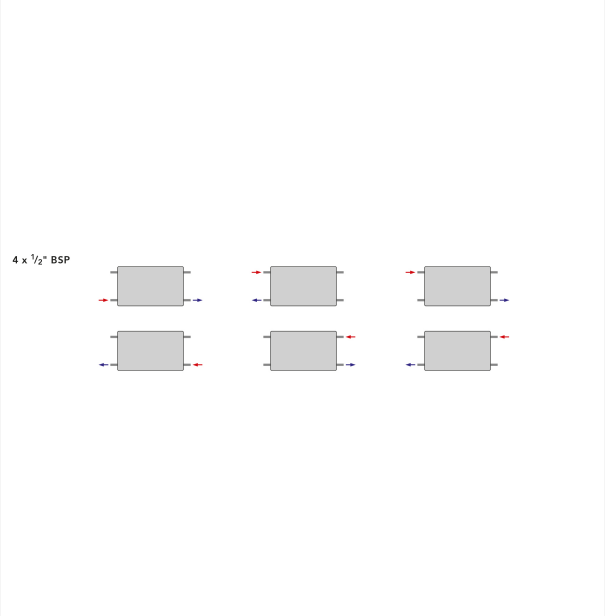



Installation - Select Compact Connection Options

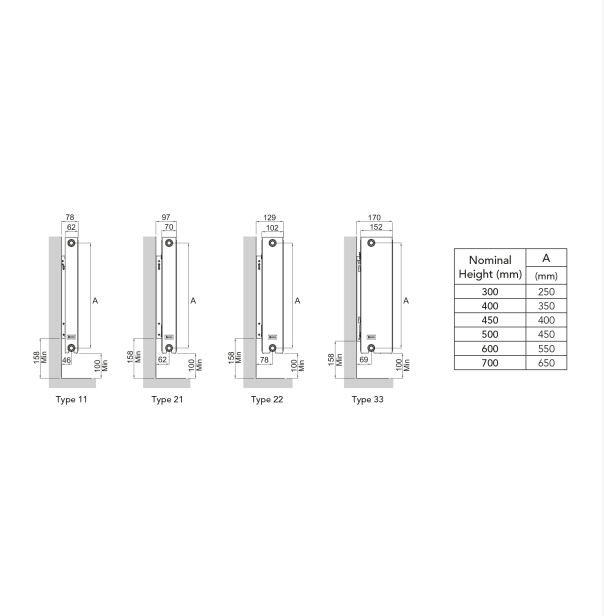


DimensionalDrawing - Select Compact Mounting Positions and Dimensions

# Resources

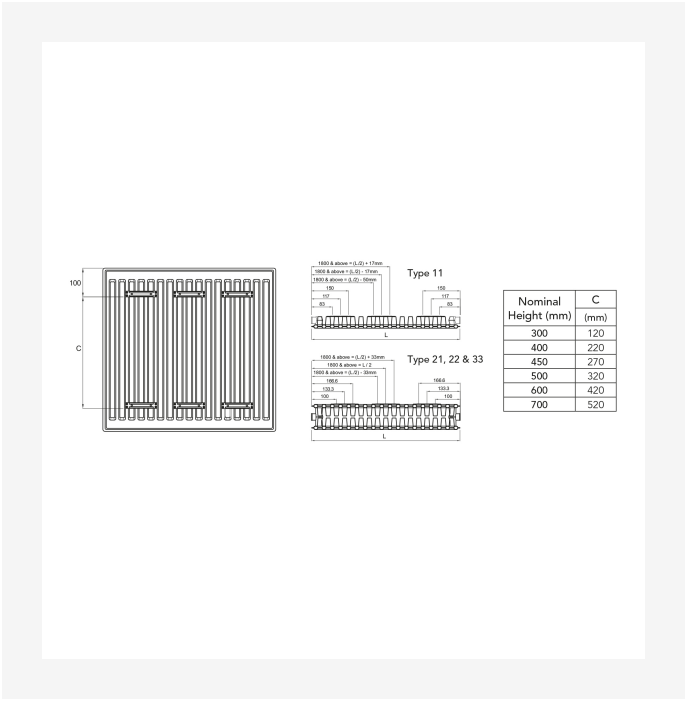


| Nominal Height (mm) | C (mm) |
|---|---|
| 300 | 120 |
| 400 | 220 |
| 450 | 270 |
| 500 | 320 |
| 600 | 420 |
| 700 | 520 |

DimensionalDrawing - Select Compact Bracket Positions and Dimensions

# Related products



Matchmate



Vertical



Finesse



Matchmaster



Matchmaster PF90



Rio Compact PLUS



Rio Plan PLUS



Rio Linea PLUS



Decorative TRV Valves



Decorative Modern Valves



Decorative TRV Valve Pack



Decorative Slimline Valves

# Related products



Decorative Traditional Valves



Myson Plus Manual Valves



Myson Plus Radiator Packs



Myson Plus TRV Valves



TRV2



TRV2 Radiator Packs

# 300

| HEIGHT 300 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 11** | | | | | | | | |
| | 400 | 60 | SS3040G | 386 | 745 | 4.5 | 1.30 | 3.5 |
| | 600 | 60 | SS3060G | 576 | 1119 | 13.5 | 1.30 | 6.0 |
| | 1000 | 60 | SS30100G | 958 | 1863 | 1.4 | 1.30 | 9.3 |
| | 1400 | 60 | SS30140G | 1341 | 2607 | 1.7 | 1.30 | 12.8 |
| | 1800 | 60 | SS30180G | 1726 | 3354 | 2.4 | 1.30 | 15.8 |
| | 2000 | 60 | SS30200G | 1917 | 3726 | 2.7 | 1.30 | 17.3 |
| | 2400 | 60 | SS30240G | 2300 | 4470 | 2.7 | 1.30 | 20.4 |
| **Type 21** | | | | | | | | |
| | 600 | 70 | SX3060G | 811 | 1558 | 12.9 | 1.28 | 8.4 |
| | 1000 | 70 | SX30100G | 1351 | 2597 | 3.4 | 1.28 | 14.0 |
| | 1400 | 70 | SX30140G | 1892 | 3635 | 3.3 | 1.28 | 19.6 |
| | 1800 | 70 | SX30180G | 2432 | 4674 | 3.4 | 1.28 | 25.2 |
| **Type 22** | | | | | | | | |
| | 600 | 102 | SD3060G | 1007 | 1967 | 1.4 | 1.31 | 11.0 |
| | 800 | 102 | SD3080G | 1343 | 2623 | 2.0 | 1.31 | 13.0 |
| | 1000 | 102 | SD30100G | 1679 | 3279 | 2.7 | 1.31 | 16.3 |
| | 1400 | 102 | SD30140G | 2350 | 4591 | 3.4 | 1.31 | 22.8 |
| | 1800 | 102 | SD30180G | 3022 | 5902 | 4.8 | 1.31 | 29.3 |
| | 2000 | 102 | SD30200G | 3357 | 6558 | 3.4 | 1.31 | 32.6 |
| | 2400 | 102 | SD30240G | 4029 | 7869 | 0.0 | 1.31 | 39.1 |
| **Type 33** | | | | | | | | |
| | 600 | 152 | ST3060G | 1408 | 2758 | 19.3 | 1.31 | 14.7 |
| | 1000 | 152 | ST30100G | 2347 | 4596 | 3.6 | 1.31 | 24.5 |
| | 1200 | 152 | ST30120G | 2817 | 5515 | 5.1 | 1.31 | 29.4 |
| | 1400 | 152 | ST30140G | 3286 | 6434 | 5.1 | 1.31 | 34.3 |

# 300

| HEIGHT 300 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| | 1800 | 152 | ST30180G | 4225 | 8273 | 5.1 | 1.31 | 44.1 |
| | 2000 | 152 | ST30200G | 4695 | 9192 | 5.1 | 1.31 | 49.0 |

# 400

| HEIGHT 400 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 11** | | | | | | | | |
| | 500 | 60 | SS4050G | 625 | 1215 | 1.7 | 1.30 | 6.7 |
| | 600 | 60 | SS4060G | 749 | 1457 | 5.1 | 1.30 | 7.7 |
| | 700 | 60 | SS4070G | 874 | 1699 | 2.2 | 1.30 | 8.9 |
| | 800 | 60 | SS4080G | 998 | 1941 | 1.3 | 1.30 | 9.8 |
| | 900 | 60 | SS4090G | 1123 | 2184 | 2.2 | 1.30 | 11.0 |
| | 1000 | 60 | SS40100G | 1247 | 2426 | 1.8 | 1.30 | 11.9 |
| | 1100 | 60 | SS40110G | 1372 | 2668 | 2.2 | 1.30 | 13.3 |
| | 1200 | 60 | SS40120G | 1496 | 2910 | 2.2 | 1.30 | 14.1 |
| | 1300 | 60 | SS40130G | 1621 | 3153 | 2.2 | 1.30 | 15.3 |
| | 1400 | 60 | SS40140G | 1746 | 3395 | 2.4 | 1.30 | 16.1 |
| | 1600 | 60 | SS40160G | 1996 | 3883 | 2.2 | 1.30 | 18.7 |
| | 1800 | 60 | SS40180G | 2246 | 4367 | 3.1 | 1.30 | 20.9 |
| **Type 21** | | | | | | | | |
| | 500 | 70 | SX4050G | 848 | 1643 | 8.8 | 1.29 | 10.3 |
| | 600 | 70 | SX4060G | 1017 | 1971 | 10.2 | 1.29 | 11.3 |
| | 700 | 70 | SX4070G | 1187 | 2300 | 1.8 | 1.29 | 13.1 |
| | 800 | 70 | SX4080G | 1357 | 2629 | 2.2 | 1.29 | 15.0 |
| | 900 | 70 | SX4090G | 1526 | 2957 | 2.6 | 1.29 | 16.9 |
| | 1000 | 70 | SX40100G | 1696 | 3286 | 3.1 | 1.29 | 18.8 |
| | 1100 | 70 | SX40110G | 1865 | 3614 | 3.5 | 1.29 | 20.6 |
| | 1200 | 70 | SX40120G | 2035 | 3943 | 3.9 | 1.29 | 22.5 |
| | 1300 | 70 | SX40130G | 2204 | 4271 | 4.5 | 1.29 | 24.4 |
| | 1400 | 70 | SX40140G | 2374 | 4600 | 4.5 | 1.29 | 26.3 |
| | 1600 | 70 | SX40160G | 2713 | 5257 | 5.4 | 1.29 | 30.0 |
| | 1800 | 70 | SX40180G | 3052 | 5914 | 6.3 | 1.29 | 33.8 |

# 400

| HEIGHT 400 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 22** | | | | | | | | |
| | 500 | 102 | SD4050G | 1063 | 2083 | 3.4 | 1.32 | 11.0 |
| | 600 | 102 | SD4060G | 1275 | 2500 | 1.8 | 1.32 | 13.2 |
| | 700 | 102 | SD4070G | 1488 | 2916 | 2.3 | 1.32 | 15.4 |
| | 800 | 102 | SD4080G | 1701 | 3333 | 2.7 | 1.32 | 17.6 |
| | 900 | 102 | SD4090G | 1913 | 3749 | 3.1 | 1.32 | 19.8 |
| | 1000 | 102 | SD40100G | 2126 | 4166 | 3.6 | 1.32 | 22.0 |
| | 1100 | 102 | SD40110G | 2338 | 4583 | 4.5 | 1.32 | 24.2 |
| | 1200 | 102 | SD40120G | 2551 | 4999 | 4.5 | 1.32 | 26.4 |
| | 1300 | 102 | SD40130G | 2763 | 5416 | 4.5 | 1.32 | 28.6 |
| | 1400 | 102 | SD40140G | 2976 | 5832 | 5.0 | 1.32 | 30.4 |
| | 1600 | 102 | SD40160G | 3401 | 6666 | 4.5 | 1.32 | 34.8 |
| | 1800 | 102 | SD40180G | 3826 | 7499 | 6.3 | 1.32 | 39.4 |

# 500

| HEIGHT 500 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 11** | | | | | | | | |
| | 400 | 60 | SS5040G | 608 | 1184 | 4.0 | 1.31 | 7.0 |
| | 500 | 60 | SS5050G | 761 | 1481 | 5.0 | 1.31 | 8.4 |
| | 600 | 60 | SS5060G | 914 | 1778 | 7.5 | 1.31 | 9.7 |
| | 700 | 60 | SS5070G | 1066 | 2074 | 1.1 | 1.31 | 11.1 |
| | 800 | 60 | SS5080G | 1217 | 2368 | 1.4 | 1.31 | 12.3 |
| | 900 | 60 | SS5090G | 1369 | 2665 | 1.6 | 1.31 | 13.7 |
| | 1000 | 60 | SS50100G | 1522 | 2962 | 1.9 | 1.31 | 14.9 |
| | 1100 | 60 | SS50110G | 1674 | 3258 | 2.2 | 1.31 | 16.1 |
| | 1200 | 60 | SS50120G | 1827 | 3555 | 2.4 | 1.31 | 17.9 |
| | 1300 | 60 | SS50130G | 1979 | 3849 | 2.7 | 1.31 | 19.3 |
| | 1400 | 60 | SS50140G | 2130 | 4146 | 2.7 | 1.31 | 20.6 |
| | 1500 | 60 | SS50150G | 2283 | 4442 | 3.0 | 1.31 | 22.0 |
| | 1600 | 60 | SS50160G | 2435 | 4739 | 3.2 | 1.31 | 23.7 |
| | 1800 | 60 | SS50180G | 2739 | 5330 | 2.7 | 1.31 | 26.3 |
| | 2000 | 60 | SS50200G | 3044 | 5923 | 2.7 | 1.31 | 28.9 |
| | 2400 | 60 | SS50240G | 3652 | 7107 | 2.7 | 1.31 | 34.0 |
| **Type 21** | | | | | | | | |
| | 400 | 70 | SX5040G | 808 | 1578 | 8.0 | 1.31 | 10.6 |
| | 500 | 70 | SX5050G | 1010 | 1972 | 10.0 | 1.31 | 11.8 |
| | 600 | 70 | SX5060G | 1212 | 2367 | 15.0 | 1.31 | 14.1 |
| | 700 | 70 | SX5070G | 1414 | 2761 | 2.2 | 1.31 | 16.5 |
| | 800 | 70 | SX5080G | 1616 | 3155 | 2.7 | 1.31 | 18.8 |
| | 900 | 70 | SX5090G | 1818 | 3550 | 3.3 | 1.31 | 21.2 |
| | 1000 | 70 | SX50100G | 2020 | 3944 | 3.8 | 1.31 | 23.5 |
| | 1200 | 70 | SX50120G | 2424 | 4733 | 5.0 | 1.31 | 28.2 |

# 500

| HEIGHT 500 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| | 1400 | 70 | SX50140G | 2828 | 5522 | 5.5 | 1.31 | 32.9 |
| | 1600 | 70 | SX50160G | 3232 | 6311 | 6.6 | 1.31 | 37.6 |
| | 1800 | 70 | SX50180G | 3636 | 7100 | 7.7 | 1.31 | 42.4 |
| **Type 22** | | | | | | | | |
| | 400 | 102 | SD5040G | 1018 | 2006 | 9.0 | 1.33 | 11.1 |
| | 500 | 102 | SD5050G | 1273 | 2508 | 13.0 | 1.33 | 13.8 |
| | 600 | 102 | SD5060G | 1527 | 3009 | 2.2 | 1.33 | 16.6 |
| | 700 | 102 | SD5070G | 1782 | 3511 | 2.8 | 1.33 | 19.4 |
| | 800 | 102 | SD5080G | 2036 | 4013 | 3.3 | 1.33 | 22.2 |
| | 900 | 102 | SD5090G | 2291 | 4514 | 3.9 | 1.33 | 24.9 |
| | 1000 | 102 | SD50100G | 2545 | 5016 | 4.4 | 1.33 | 27.7 |
| | 1100 | 102 | SD50110G | 2800 | 5517 | 5.5 | 1.33 | 30.3 |
| | 1200 | 102 | SD50120G | 3054 | 6019 | 5.5 | 1.33 | 33.1 |
| | 1300 | 102 | SD50130G | 3309 | 6520 | 5.5 | 1.33 | 35.8 |
| | 1400 | 102 | SD50140G | 3563 | 7022 | 5.5 | 1.33 | 38.5 |
| | 1500 | 102 | SD50150G | 3818 | 7523 | 5.5 | 1.33 | 41.3 |
| | 1600 | 102 | SD50160G | 4073 | 8025 | 5.5 | 1.33 | 44.2 |
| | 1800 | 102 | SD50180G | 4582 | 9028 | 7.7 | 1.33 | 49.6 |
| | 2000 | 102 | SD50200G | 5091 | 10031 | 8.3 | 1.33 | 55.1 |
| | 2400 | 102 | SD50240G | 6109 | 12038 | 9.9 | 1.33 | 66.1 |
| **Type 33** | | | | | | | | |
| | 600 | 152 | ST5060G | 2105 | 4166 | 19.5 | 1.34 | 25.0 |
| | 700 | 152 | ST5070G | 2455 | 4860 | 3.3 | 1.34 | 29.1 |
| | 800 | 152 | ST5080G | 2806 | 5555 | 4.1 | 1.34 | 33.3 |
| | 900 | 152 | ST5090G | 3157 | 6249 | 4.9 | 1.34 | 37.5 |
| | 1000 | 152 | ST50100G | 3508 | 6943 | 5.8 | 1.34 | 41.6 |

# 500

| HEIGHT 500 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| | 1100 | 152 | ST50110G | 3858 | 7638 | 6.6 | 1.34 | 45.8 |
| | 1200 | 152 | ST50120G | 4209 | 8332 | 7.4 | 1.34 | 50.0 |
| | 1400 | 152 | ST50140G | 4911 | 9721 | 9.0 | 1.34 | 58.3 |
| | 1600 | 152 | ST50160G | 5612 | 11109 | 9.8 | 1.34 | 66.6 |
| | 1800 | 152 | ST50180G | 6314 | 12498 | 11.5 | 1.34 | 74.9 |
| | 2000 | 152 | ST50200G | 7015 | 13887 | 8.2 | 1.34 | 83.3 |
| | 2300 | 152 | ST50230G | 8067 | 15970 | 8.2 | 1.34 | 95.7 |

# 600

| HEIGHT 600 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 11** | | | | | | | | |
| | 400 | 60 | SS6040G | 711 | 1389 | 2.4 | 1.31 | 8.3 |
| | 500 | 60 | SS6050G | 890 | 1737 | 5.4 | 1.31 | 9.9 |
| | 600 | 60 | SS6060G | 1068 | 2085 | 1.0 | 1.31 | 11.5 |
| | 700 | 60 | SS6070G | 1246 | 2433 | 2.0 | 1.31 | 13.1 |
| | 800 | 60 | SS6080G | 1423 | 2777 | 2.0 | 1.31 | 14.8 |
| | 900 | 60 | SS6090G | 1601 | 3125 | 2.0 | 1.31 | 16.5 |
| | 1000 | 60 | SS60100G | 1779 | 3473 | 2.0 | 1.31 | 18.2 |
| | 1100 | 60 | SS60110G | 1957 | 3821 | 3.0 | 1.31 | 19.4 |
| | 1200 | 60 | SS60120G | 2136 | 4169 | 3.0 | 1.31 | 21.3 |
| | 1300 | 60 | SS60130G | 2312 | 4514 | 3.2 | 1.31 | 23.0 |
| | 1400 | 60 | SS60140G | 2491 | 4862 | 3.8 | 1.31 | 24.6 |
| | 1600 | 60 | SS60160G | 2847 | 5558 | 4.0 | 1.31 | 28.3 |
| | 1800 | 60 | SS60180G | 3202 | 6251 | 4.5 | 1.31 | 31.4 |
| | 2000 | 60 | SS60200G | 3558 | 6947 | 5.0 | 1.31 | 34.5 |
| | 2400 | 60 | SS60240G | 4270 | 7643 | 5.8 | 1.31 | 40.7 |
| **Type 21** | | | | | | | | |
| | 400 | 70 | SX6040G | 932 | 1829 | 4.3 | 1.32 | 11.3 |
| | 500 | 70 | SX6050G | 1165 | 2286 | 9.8 | 1.32 | 14.2 |
| | 600 | 70 | SX6060G | 1398 | 2743 | 6.6 | 1.32 | 17.0 |
| | 700 | 70 | SX6070G | 1631 | 3200 | 6.6 | 1.32 | 19.8 |
| | 800 | 70 | SX6080G | 1864 | 3658 | 6.6 | 1.32 | 22.6 |
| | 900 | 70 | SX6090G | 2097 | 4115 | 6.6 | 1.32 | 25.5 |
| | 1000 | 70 | SX60100G | 2330 | 4572 | 6.6 | 1.32 | 28.3 |
| | 1100 | 70 | SX60110G | 2563 | 5029 | 6.6 | 1.32 | 31.1 |
| | 1200 | 70 | SX60120G | 2796 | 5486 | 6.6 | 1.32 | 34.0 |

# 600

| HEIGHT 600 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| | 1300 | 70 | SX60130G | 3030 | 5944 | 6.5 | 1.32 | 36.6 |
| | 1400 | 70 | SX60140G | 3263 | 6401 | 7.2 | 1.32 | 39.4 |
| | 1600 | 70 | SX60160G | 3729 | 7315 | 6.6 | 1.32 | 45.3 |
| | 1800 | 70 | SX60180G | 4195 | 8230 | 9.2 | 1.32 | 50.9 |
| **Type 22** | | | | | | | | |
| | 400 | 102 | SD6040G | 1179 | 2332 | 6.1 | 1.34 | 13.4 |
| | 500 | 102 | SD6050G | 1474 | 2916 | 18.3 | 1.34 | 16.7 |
| | 600 | 102 | SD6060G | 1769 | 3499 | 6.6 | 1.34 | 20.0 |
| | 700 | 102 | SD6070G | 2064 | 4082 | 6.6 | 1.34 | 23.4 |
| | 800 | 102 | SD6080G | 2358 | 4665 | 6.6 | 1.34 | 26.7 |
| | 900 | 102 | SD6090G | 2653 | 5248 | 6.6 | 1.34 | 30.1 |
| | 1000 | 102 | SD60100G | 2948 | 5831 | 6.6 | 1.34 | 33.7 |
| | 1100 | 102 | SD60110G | 3243 | 6414 | 5.9 | 1.34 | 36.7 |
| | 1200 | 102 | SD60120G | 3538 | 6997 | 6.0 | 1.34 | 40.1 |
| | 1300 | 102 | SD60130G | 3832 | 7580 | 6.6 | 1.34 | 43.2 |
| | 1400 | 102 | SD60140G | 4127 | 8164 | 7.9 | 1.34 | 46.2 |
| | 1600 | 102 | SD60160G | 4717 | 9330 | 6.6 | 1.34 | 53.1 |
| | 1800 | 102 | SD60180G | 5306 | 10496 | 6.6 | 1.34 | 59.8 |
| | 2000 | 102 | SD60200G | 5896 | 11662 | 10.6 | 1.34 | 66.5 |
| | 2400 | 102 | SD60240G | 7075 | 13995 | 11.9 | 1.34 | 79.9 |
| **Type 33** | | | | | | | | |
| | 400 | 152 | ST6040G | 1615 | 3215 | 6.3 | 1.35 | 20.1 |
| | 500 | 152 | ST6050G | 2018 | 4019 | 12.6 | 1.35 | 24.9 |
| | 600 | 152 | ST6060G | 2422 | 4823 | 3.9 | 1.35 | 29.4 |
| | 700 | 152 | ST6070G | 2825 | 5627 | 9.8 | 1.35 | 33.9 |
| | 800 | 152 | ST6080G | 3229 | 6431 | 5.9 | 1.35 | 38.4 |

# 600

| HEIGHT 600 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| | 900 | 152 | ST6090G | 3633 | 7235 | 9.8 | 1.35 | 42.8 |
| | 1000 | 152 | ST60100G | 4036 | 8039 | 7.8 | 1.35 | 47.3 |
| | 1100 | 152 | ST60110G | 4440 | 8843 | 9.8 | 1.35 | 51.8 |
| | 1200 | 152 | ST60120G | 4844 | 9646 | 9.8 | 1.35 | 56.3 |
| | 1400 | 152 | ST60140G | 5651 | 11254 | 10.8 | 1.35 | 65.2 |
| | 1600 | 152 | ST60160G | 6458 | 12862 | 11.8 | 1.35 | 74.2 |
| | 1800 | 152 | ST60180G | 7266 | 14470 | 14.0 | 1.35 | 83.1 |
| | 2000 | 152 | ST60200G | 8073 | 16077 | 15.7 | 1.35 | 100.4 |
| | 2300 | 152 | ST60230G | 9127 | 18120 | 9.8 | 1.35 | 105.5 |

# 750

| HEIGHT 750 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 11** | | | | | | | | |
| | 400 | 60 | SS7540G | 857 | 1679 | 9.6 | 1.31 | 9.0 |
| | 500 | 60 | SS7550G | 1071 | 2098 | 2.0 | 1.31 | 11.2 |
| | 600 | 60 | SS7560G | 1286 | 2518 | 3.0 | 1.31 | 13.4 |
| | 700 | 60 | SS7570G | 1500 | 2938 | 4.0 | 1.31 | 15.7 |
| | 800 | 60 | SS7580G | 1714 | 3357 | 3.1 | 1.31 | 18.8 |
| | 900 | 60 | SS7590G | 1928 | 3777 | 3.5 | 1.31 | 21.8 |
| | 1000 | 60 | SS75100G | 2143 | 4197 | 3.9 | 1.31 | 23.5 |
| | 1200 | 60 | SS75120G | 2571 | 5036 | 4.6 | 1.31 | 28.2 |
| | 1400 | 60 | SS75140G | 3000 | 5875 | 5.4 | 1.31 | 32.9 |
| | 1600 | 60 | SS75160G | 3428 | 6715 | 6.2 | 1.31 | 37.6 |
| **Type 21** | | | | | | | | |
| | 400 | 70 | SX7540G | 1111 | 2192 | 14.0 | 1.33 | 14.1 |
| | 500 | 70 | SX7550G | 1389 | 2740 | 6.6 | 1.33 | 17.6 |
| | 600 | 70 | SX7560G | 1666 | 3288 | 6.6 | 1.33 | 21.2 |
| | 700 | 70 | SX7570G | 1944 | 3836 | 6.6 | 1.33 | 23.9 |
| | 800 | 70 | SX7580G | 2222 | 4384 | 19.8 | 1.33 | 27.4 |
| | 900 | 70 | SX7590G | 2500 | 4932 | 19.8 | 1.33 | 31.8 |
| | 1000 | 70 | SX75100G | 2777 | 5480 | 7.8 | 1.33 | 34.2 |
| | 1200 | 70 | SX75120G | 3333 | 6576 | 8.3 | 1.33 | 42.4 |
| | 1400 | 70 | SX75140G | 3888 | 7672 | 8.3 | 1.33 | 49.4 |
| | 1600 | 70 | SX75160G | 4444 | 8767 | 7.0 | 1.33 | 56.5 |
| **Type 22** | | | | | | | | |
| | 400 | 102 | SD7540G | 1411 | 2805 | 6.6 | 1.35 | 16.8 |
| | 500 | 102 | SD7550G | 1764 | 3506 | 3.8 | 1.35 | 21.0 |
| | 600 | 102 | SD7560G | 2117 | 4207 | 8.0 | 1.35 | 24.0 |

# 750

| HEIGHT 750 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| | 700 | 102 | SD7570G | 2470 | 4908 | 13.0 | 1.35 | 29.4 |
| | 800 | 102 | SD7580G | 2822 | 5609 | 3.0 | 1.35 | 32.0 |
| | 900 | 102 | SD7590G | 3175 | 6310 | 3.8 | 1.35 | 37.8 |
| | 1000 | 102 | SD75100G | 3528 | 7012 | 7.6 | 1.35 | 0.0 |
| | 1200 | 102 | SD75120G | 4234 | 8414 | 8.3 | 1.35 | 50.5 |
| | 1400 | 102 | SD75140G | 4939 | 9816 | 8.3 | 1.35 | 58.9 |
| | 1600 | 102 | SD75160G | 5645 | 11219 | 7.6 | 1.35 | 43.5 |
| **Type 33** | | | | | | | | |
| | 400 | 152 | ST7540G | 1885 | 3757 | 22.5 | 1.35 | 27.8 |
| | 500 | 152 | ST7550G | 2356 | 4697 | 9.8 | 1.35 | 34.8 |
| | 600 | 152 | ST7560G | 2827 | 5636 | 9.8 | 1.35 | 41.7 |
| | 700 | 152 | ST7570G | 3298 | 6575 | 9.8 | 1.35 | 48.7 |
| | 800 | 152 | ST7580G | 3770 | 7515 | 29.4 | 1.35 | 55.6 |
| | 900 | 152 | ST7590G | 4241 | 8454 | 10.4 | 1.35 | 62.6 |
| | 1000 | 152 | ST75100G | 4712 | 9393 | 11.5 | 1.35 | 69.6 |
| | 1200 | 152 | ST75120G | 5654 | 11272 | 12.3 | 1.35 | 69.6 |
| | 1400 | 152 | ST75140G | 6597 | 13151 | 12.3 | 1.35 | 69.6 |

# 900

| HEIGHT 900 mm | LENGTH | DEPTH | ITEM NO | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|---|---|---|---|---|---|---|---|---|
| **Type 33** | | | | | | | | |
| | 400 | 152 | ST9040G | 2777 | 4449 | 12.3 | 1.36 | 37.9 |
| | 500 | 152 | ST9050G | 3472 | 5562 | 12.3 | 1.36 | 47.3 |
| | 600 | 152 | ST9060G | 4166 | 6674 | 12.3 | 1.36 | 56.8 |
| | 700 | 152 | ST9070G | 4860 | 7786 | 6.6 | 1.36 | 66.3 |
| | 800 | 152 | ST9080G | 5555 | 8898 | 8.3 | 1.36 | 75.8 |
| | 900 | 152 | ST9090G | 6249 | 10011 | 9.9 | 1.36 | 85.2 |
| | 1000 | 152 | ST90100G | 6943 | 11123 | 11.6 | 1.36 | 94.7 |
| | 1200 | 152 | ST90120G | 8332 | 13348 | 12.0 | 1.36 | 113.6 |
| | 1400 | 152 | ST90140G | 9721 | 15572 | 13.3 | 1.36 | 132.6 |