



Andmeleht
2026-08-28

Paros V

Vertikaalne radiاتور pehmelt ümardatud külgsjoontega.



- ✓ Kaasaegne ümar disain
- ✓ Sobib piiratud seinaruumile
- ✓ Kõrge kvaliteediline roostevabast terasest rätikuhoidja
- ✓ Radiator keskühendusega
- ✓ Ült pööratav ühendus

Paros V dekoratiivradiاتور väljendusrikaste sujuvate kaartega, esipaneel liitub katkestusteta külgspaneelidega; sobib modernsetesse interjööridesse, saadaval RAL toonides; 10-aastane garantii.



Kasutusala

Paros V on kaasaegne alternatiiv horisontaalsetele radiaatoritele, valmistatud terasest. Radiaatoril on tehases paigaldatud elegantne sile terasest esipaneel, külgsuunalised ja ülemine rest. Saadaval erinevates mõõtudes ning ideaalne lahendus ruumidesse, kus seinaruumi on vähe. Mõeldud kahetorusüsteemidele elu- ja äripindades, 6 × 1/2" G ühendustega.

Möödistamine

Õige tootevaliku tagamiseks kasutage meie kalkulaatoreid ja tootekatalooge. Kui vajate abi, võtke ühendust meie müügimeeskonnaga.

Kasutamine

Pakendis sisaldab õhutuskraanide ja pimeotste komplekte; termostaatseid radiaatoriventile saab paigaldada ruumitemperatuuri reguleerimiseks.

AMA-tekst

Paros V dekoratiivradiaator integreeritud esiplaadi ja külgsuunaliste kaardusjoonega tagab ühtlase visuaalse ülemineku seina pinnani. Saadaval neljas laiuses (380–830 mm) ja kolmes kõrguses (1800, 1950, 2100 mm). Alumine keskühendus võimaldab diskreetset paigaldust ja ei piira juurdepääsu reguleerimisventiilile. Tüübid 11 ja 21 pakuvad erinevaid soojusvõimsusi. Ühendused: 4×G 1/2" all, 2×G 1/2" üleval. Komplektis MCW-V kinnitused, pimekork ja õhutusventiil. Standardvärv RAL 9016; muud toonid tellimisel. Garantii 10 aastat.



Spetsifikatsioonid

OMADUSED	ÜHIK	VÄÄRTUSED
ETIM-klass		EC011022
Materjal		Terase
Tüüp		11, 21
Pinnastruktuur		Sile tasane
Maksimaalne töö rõhk	bar	10
Standardühenduste arv		4
Soojusandmine vastavalt EN 442 tunnustatud laborile		Jah
Maksimaalne töötemperatuur	°C	110
Standardvärv		Jah
Värv		Valge
RAL-number		9016
Rest/Katteplaat		Jah
Rest/Katteplaat		Jah
Läikeväärtus		Särav
Keerme mõõt (toll)		1/2 tolli
Ühenduskeere		Sisemine keere
Ühepunktiühendusega		Jah
Õhutusühendusega		Jah
Õhutusventiili/õhutusavaga		Jah
Tühjendusvõimalusega		Jah



Dokumendid

DOKUMENDID	DOKUMENDI TÜÜP	LINK
Purmo Decorative Bathroom Radiators and Fan Convectors Catalog 2019	ProductCatalog	https://asset.productmarketingcloud.com/api/assetstorage/3577_8b0d8303-f311-4ee8-8447-53db8c76794d



Ressursid




ProductImage - New_Paros-V-Towel-warmer product image



ProductImage - New_Paros-V main picture




ProductImage - New_Paros-V product image

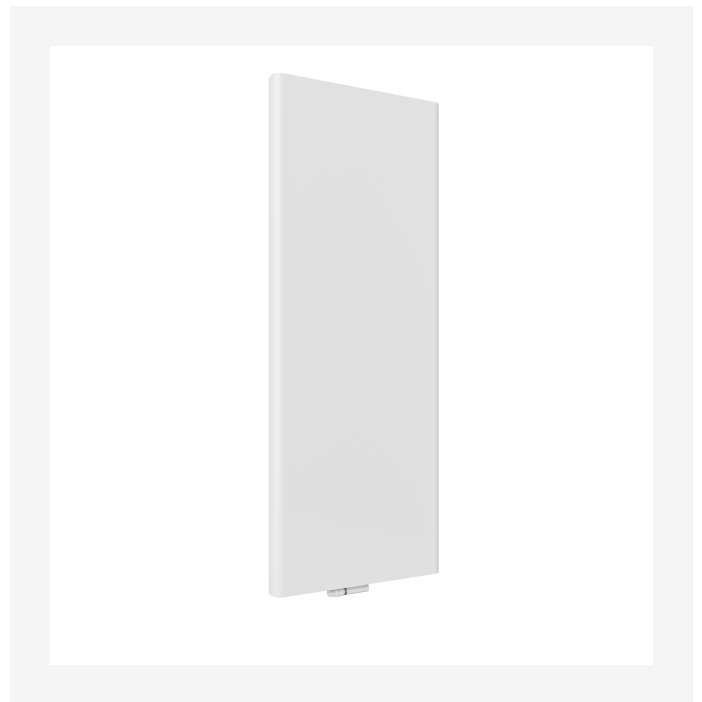


ProductImage - New_Paros-V product image




Ressursid

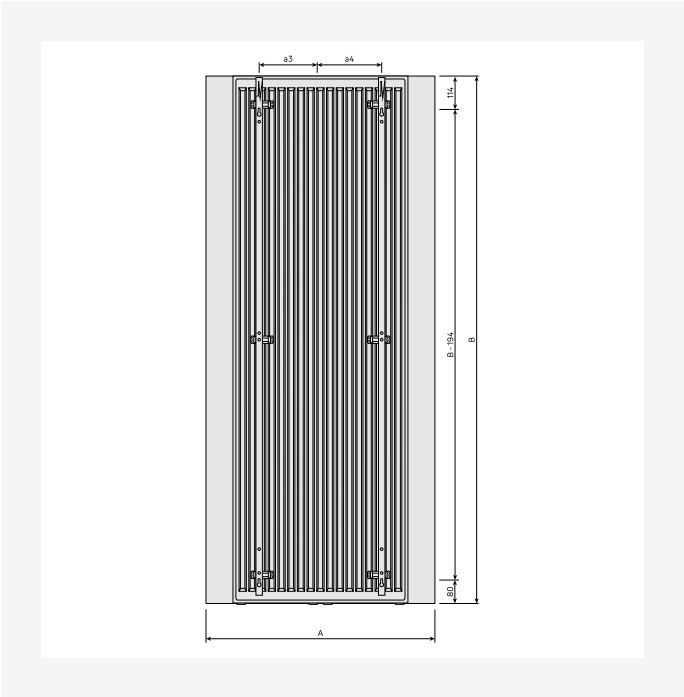


DimensionalDrawing - Paros V, tüüp 21, tagantvaade MCWV kinnitustega

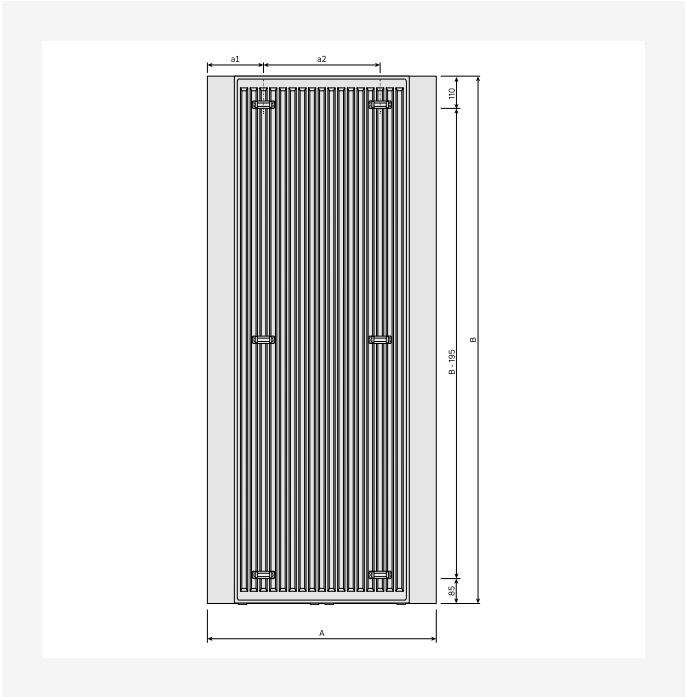

DimensionalDrawing - Paros V, tüüp 21, tagantvaade

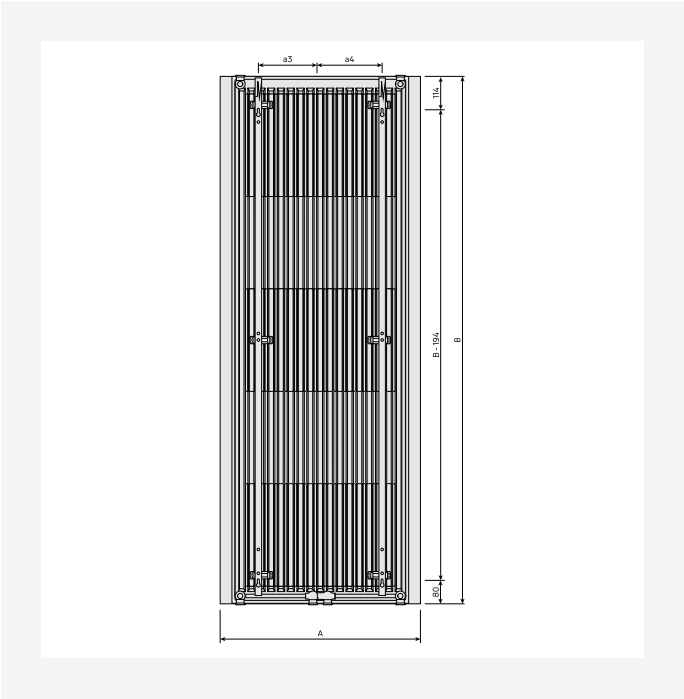


DimensionalDrawing - Paros V, tüüp 11, tagantvaade MCWV kinnitustega

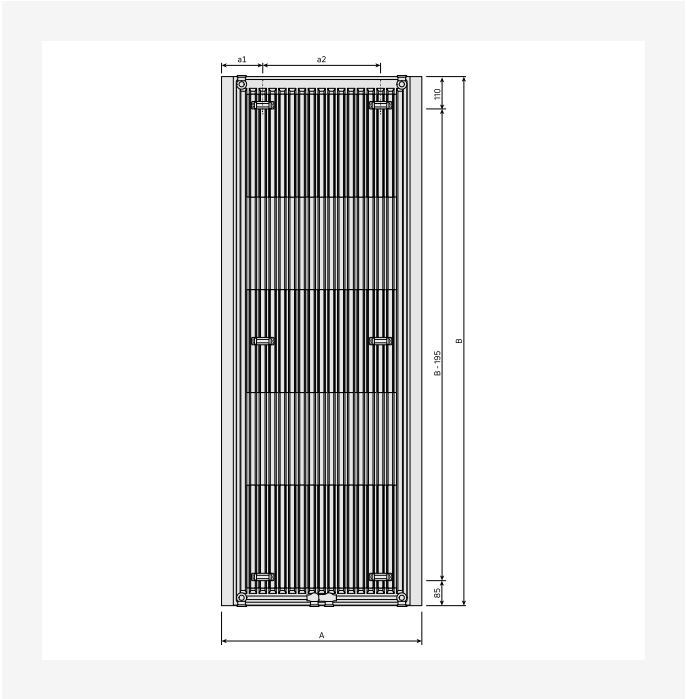


DimensionalDrawing - Paros V, tüüp 11, tagantvaade




Ressursid




DimensionalDrawing - Paros V, tüüp 21, pealtvaade



DimensionalDrawing - Paros V, tüüp 11, pealtvaade

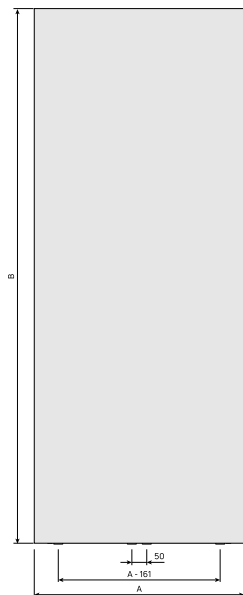

DimensionalDrawing - Paros V, tüüp 21, eestvaade

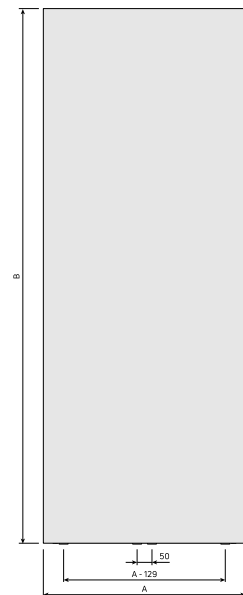

DimensionalDrawing - Paros V, tüüp 11, eestvaade



Technical drawing of a door profile (Fig. 10). The drawing shows a cross-section of the profile with various dimensions and components labeled.

Dimensions (mm):

- 112 (Total width)
- 15 (Width of the top flange)
- 97 (Width of the main body)
- 116 (Height of the top flange)
- 116 (Height of the main body)
- 100 (Height of the bottom flange)
- 80 (Height of the bottom flange)
- 70 (Width of the bottom flange)
- B (Total height)
- B - 194 (Height of the main body)

Components and Features:

- Top flange (hatched area)
- Main body (hatched area)
- Bottom flange (hatched area)
- Internal components (hatched area)
- Seal (hatched area)
- Locking mechanism (hatched area)

Technical drawing of a door profile (likely a door frame or threshold) showing dimensions and material specifications.

Dimensions:

- Overall width: 65
- Top flange width: 81
- Top flange thickness: 16
- Bottom flange width: 114
- Bottom flange thickness: 16
- Bottom flange height: 49
- Bottom flange width: 83
- Bottom flange height: 100
- Bottom flange width: 100
- Bottom flange height: 100
- Bottom flange width: 100
- Bottom flange height: 100

Material Specifications:

- Top flange: B = 194
- Bottom flange: B = 194

The diagram illustrates the four steps of a 180-degree rotation of a rectangular object. Each step shows the object in a different orientation, with red and blue arrows indicating the direction of movement or rotation. A curved arrow labeled 180° is shown in the second and fourth steps, indicating the final rotation.

- Step 1:** The object is in its initial upright position. A red arrow points up from the bottom center, and a blue arrow points down from the top center.
- Step 2:** The object is rotated 90 degrees clockwise. A red arrow points down from the top center, and a blue arrow points up from the bottom center. A curved arrow labeled 180° indicates the final rotation.
- Step 3:** The object is rotated 180 degrees clockwise. A red arrow points up from the bottom center, and a blue arrow points down from the top center.
- Step 4:** The object is rotated 270 degrees clockwise. A red arrow points down from the top center, and a blue arrow points up from the bottom center. A curved arrow labeled 180° indicates the final rotation.

Technical drawing of a door profile (likely a sliding door) showing dimensions and components. The drawing is oriented vertically with the door profile on the left and the wall on the right.

Dimensions (in mm):


- Overall height: 2040
- Height of the main door panel: 1914
- Height of the top section: 120
- Height of the bottom section: 60
- Width of the main door panel: 133
- Width of the top section: 16
- Width of the bottom section: 67

Components and Features:

- Top Section:** A small rectangular section at the top of the door profile, likely for a handle or lock mechanism.
- Main Door Panel:** The large central section of the door profile, shown with a hatched pattern.
- Bottom Section:** A small rectangular section at the bottom of the door profile, likely for a base or seal.
- Wall:** The wall into which the door profile is mounted, shown with a hatched pattern.
- Mounting:** The door profile is mounted into a wall using a bracket or anchor, shown with a hatched pattern.

8 / 14 | Andmeleht | Paros V | 2026-08-28






DimensionalDrawing - Paros V, tüüp 21, pealtvaade




DimensionalDrawing - Paros V, tüüp 11, pealtvaade




Ressursid

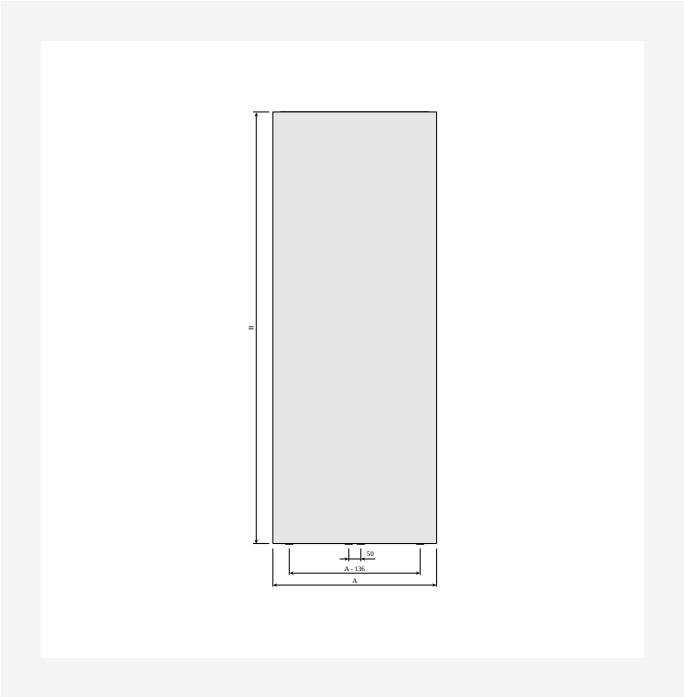

DimensionalDrawing - Paros V, tüüp 11, eestvaade

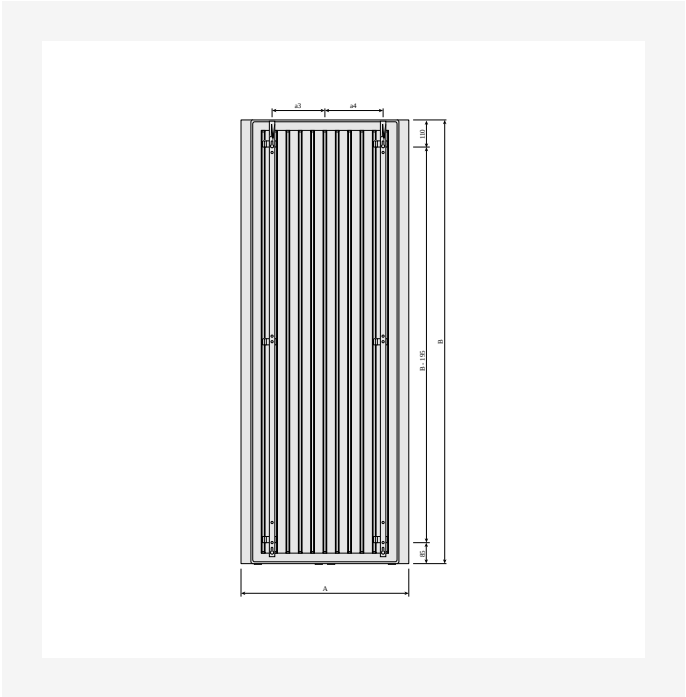

DimensionalDrawing - Paros V, tagantvaade MCW V kinnitustega

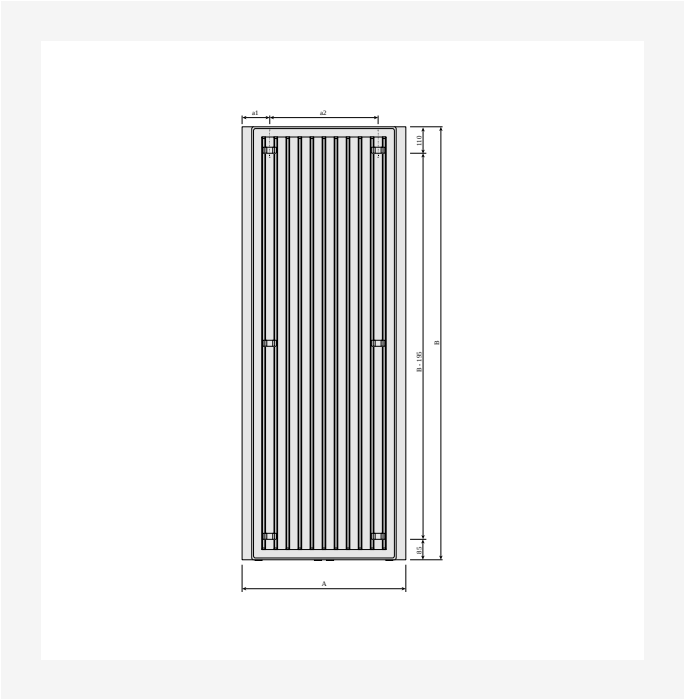

DimensionalDrawing - Paros V, tagantvaade



Seotud tooted



Rätikuhoidja Paros V /
Sanbe



Õhutusvõti



Parandussvärvi spreid



1800

KÕRGUS 1800 mm	PIKKUS	SÜGAVUS		Võimsus (W) 45/35/20°C	Võimsus (W) 55/45/20°C	Võimsus (W) 60/45/20°C	MAHT (l)	N- ekponent	KAAL (kg)
Tüüp 11									
	373	65	FMZ1118003010300	365	378	--	2.6	1.26	21.0
	523	65	FMZ1118004510300	524	546	--	3.8	1.26	29.6
	673	65	FMZ1118006010300	678	709	--	4.9	1.27	38.1
Tüüp 21									
	405	97	FMZ2118003010300	449	495	--	4.8	1.29	32.3
	555	97	FMZ2118004510300	637	716	--	7.2	1.30	47.7
	705	97	FMZ2118006010300	810	930	--	9.7	1.31	63.1



1950

KÕRGUS 1950 mm	PIKKUS	SÜGAVUS		Võimsus (W) 45/35/20°C	Võimsus (W) 55/45/20°C	Võimsus (W) 60/45/20°C	MAHT (l)	N- ekponent	KAAL (kg)
Tüüp 11									
	373	65	FMZ1119503010300	393	403	--	2.9	1.26	22.5
	523	65	FMZ1119504510300	560	582	--	4.1	1.26	31.6
	673	65	FMZ1119506010300	717	755	--	5.4	1.27	40.8
	823	65	FMZ1119507510300	865	923	--	6.7	1.27	49.9
Tüüp 21									
	405	97	FMZ2119503010300	470	521	--	5.2	1.29	34.8
	555	97	FMZ2119504510300	674	756	--	7.8	1.30	51.3
	705	97	FMZ2119506010300	868	985	--	10.4	1.30	67.9
	855	97	FMZ2119507510300	1051	1207	--	13.0	1.31	84.4



2100

KÕRGUS 2100 mm	PIKKUS SÜGAVUS			Võimsus (W) 45/35/20°C	Võimsus (W) 55/45/20°C	Võimsus (W) 60/45/20°C	MAHT (l)	N- ekponent	KAAL (kg)
Tüüp 11									
	673	65	FMZ1121006010300	761	803	--	5.8	1.26	43.6
	823	65	FMZ1121007510300	908	980	--	7.3	1.27	53.4
Tüüp 21									
	705	97	FMZ2121006010300	926	1038	--	11.1	1.30	72.7
	855	97	FMZ2121007510300	1135	1276	--	13.9	1.30	90.4