




Andmeleht

2026-10-08

Paros V

Vertikaalne radiاتور pehmelt ümardatud külgjoontega.

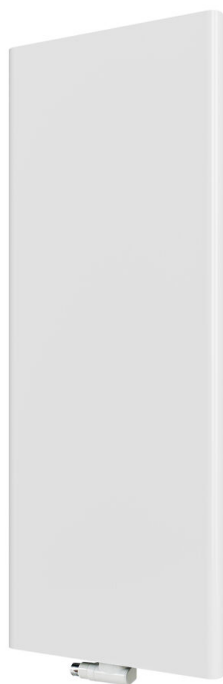

- ✓ Kaasaegne ümar disain
- ✓ Sobib piiratud seinaruumile
- ✓ Kõrge kvaliteediline roostevabast terasest rätikuhoidja
- ✓ Radiator kesköhendamiseks
- ✓ Ült pööratav ühendus

Paros V dekoratiivradiator väljendusrikaste sujuvate kaartega, esipaneel liitub katkestusteta külgpaneelidega; sobib modernsetesse interjööridesse, saadaval RAL toonides; 10-aastane garantii.



Kasutusala

Paros V on kaasaegne alternatiiv horisontaalsetele radiaatoritele, valmistatud terasest. Radiaatoril on tehases paigaldatud elegantne sile terasest esipaneel, külgsipaneelid ja ülemine rest. Saadaval erinevates mõõtudes ning ideaalne lahendus ruumidesse, kus seinaruumi on vähe. Mõeldud kahetorusüsteemidele elu- ja äripindades, 6 × 1/2" G ühendustega.

Möödistamine

Õige tootevaliku tagamiseks kasutage meie kalkulaatoreid ja tootekatalooge. Kui vajate abi, võtke ühendust meie müügimeeskonnaga.

Kasutamine

Pakendis sisaldab õhutuskraanide ja pimeotste komplekte; termostaatseid radiaatoriventile saab paigaldada ruumitemperatuuri reguleerimiseks.

AMA-tekst

Paros V dekoratiivradiaator integreeritud esiplaadi ja külgsipaneelide kaardusjoonega tagab ühtlase visuaalse ülemineku seina pinnani. Saadaval neljas laiuses (380–830 mm) ja kolmes kõrguses (1800, 1950, 2100 mm). Alumine keskühendus võimaldab diskreetset paigaldust ja ei piira juurdepääsu reguleerimisventiilile. Tüübid 11 ja 21 pakuvad erinevaid soojusvõimsusi. Ühendused: 4×G 1/2" all, 2×G 1/2" üleval. Komplektis MCW-V kinnitused, pimekork ja õhutusventiil. Standardvärv RAL 9016; muud toonid tellimisel. Garantii 10 aastat.



Spetsifikatsioonid

OMADUSED	ÜHIK	VÄÄRTUSED
ETIM-klass		EC011022
Materjal		Terase
Tüüp		11, 21
Pinnastruktuur		Sile tasane
Maksimaalne töö rõhk	bar	10
Standardühenduste arv		4
Soojusandmine vastavalt EN 442 tunnustatud laborile		Jah
Maksimaalne töötemperatuur	°C	110
Standardvärv		Jah
Värv		Valge
RAL-number		9016
Rest/Katteplaat		Jah
Rest/Katteplaat		Jah
Läikeväärtus		Särav
Keerme mõõt (toll)		1/2 tolli
Ühenduskeere		Sisemine keere
Ühepunktiühendusega		Jah
Õhutusühendusega		Jah
Õhutusventiili/õhutusavaga		Jah
Tühjendusvõimalusega		Jah



Dokumendid

DOKUMENDID	DOKUMENDI TÜÜP	LINK
Purmo Decorative Bathroom Radiators and Fan Convectors Catalog 2019	ProductCatalog	https://asset.productmarketingcloud.com/api/assetstorage/3577_8b0d8303-f311-4ee8-8447-53db8c76794d



Ressursid




ProductImage - New_Paros-V-Towel-warmer product image



ProductImage - New_Paros-V main picture




ProductImage - New_Paros-V product image

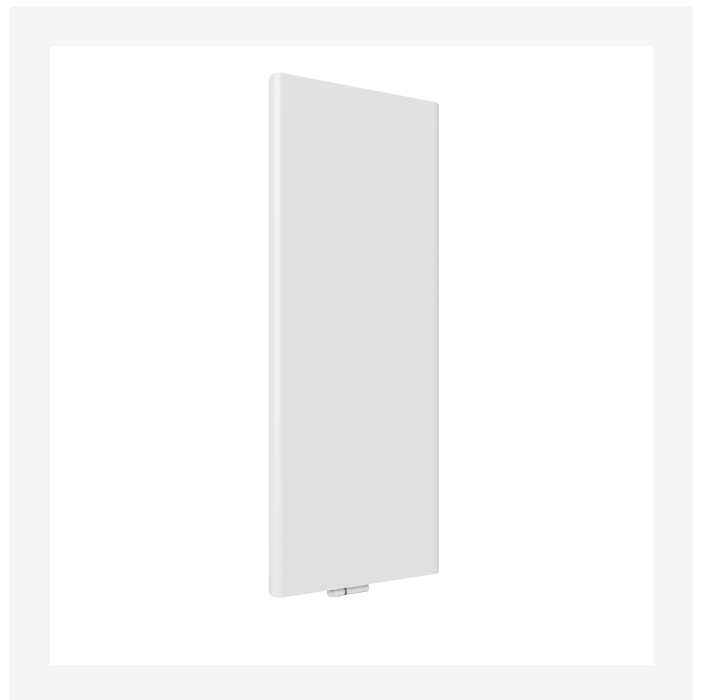


ProductImage - New_Paros-V product image




Ressursid

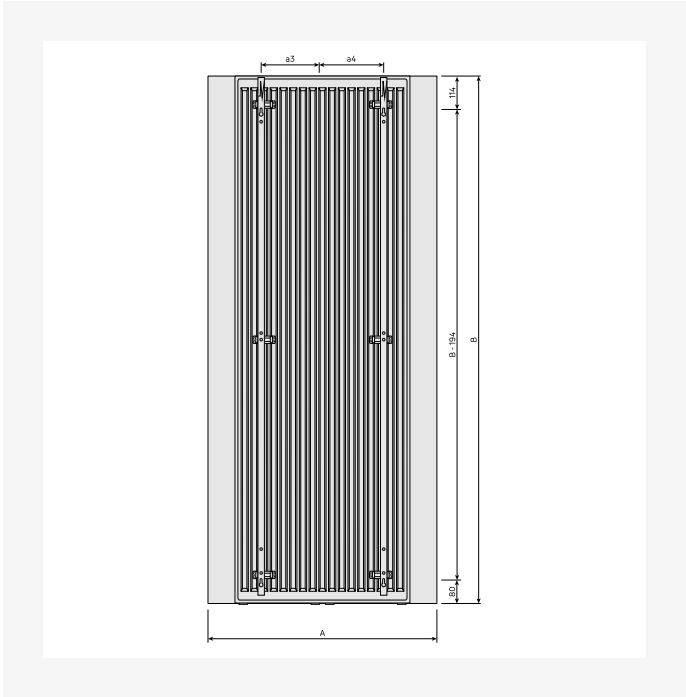


DimensionalDrawing - Paros V, tüüp 21, tagantvaade MCWV kinnitustega

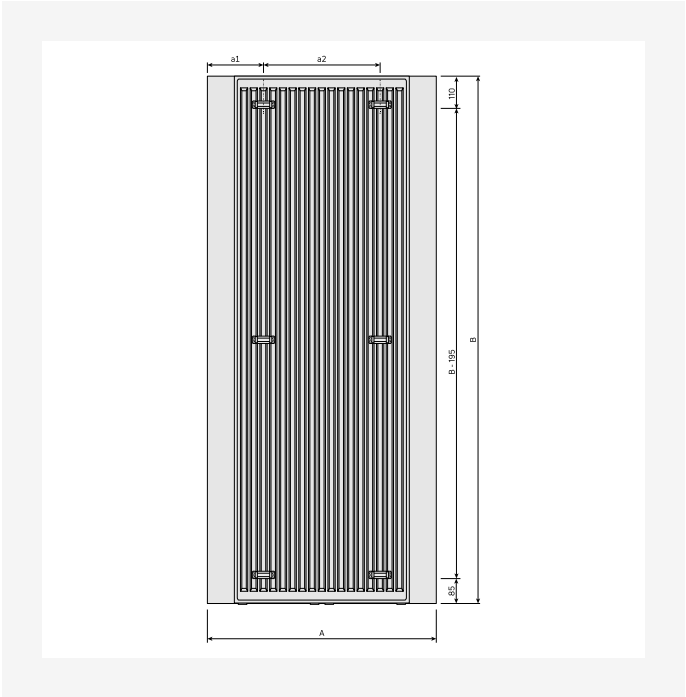

DimensionalDrawing - Paros V, tüüp 21, tagantvaade

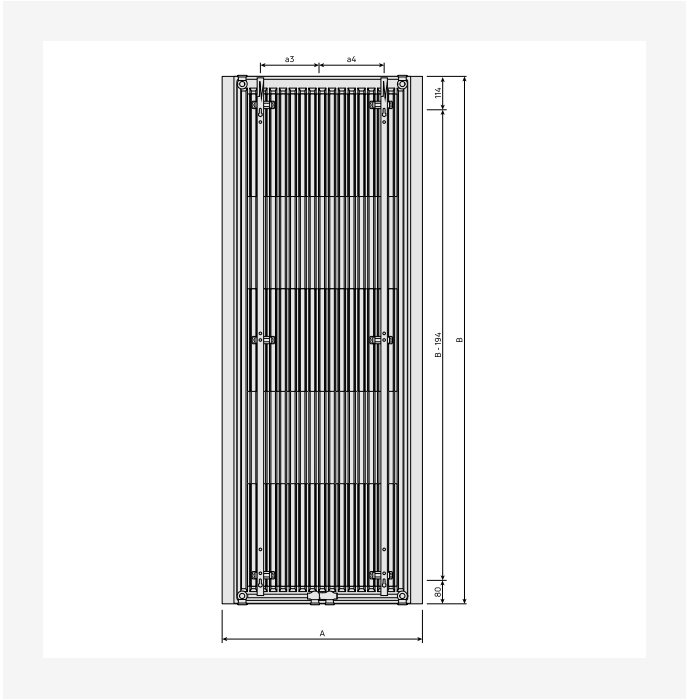


DimensionalDrawing - Paros V, tüüp 11, tagantvaade MCWV kinnitustega

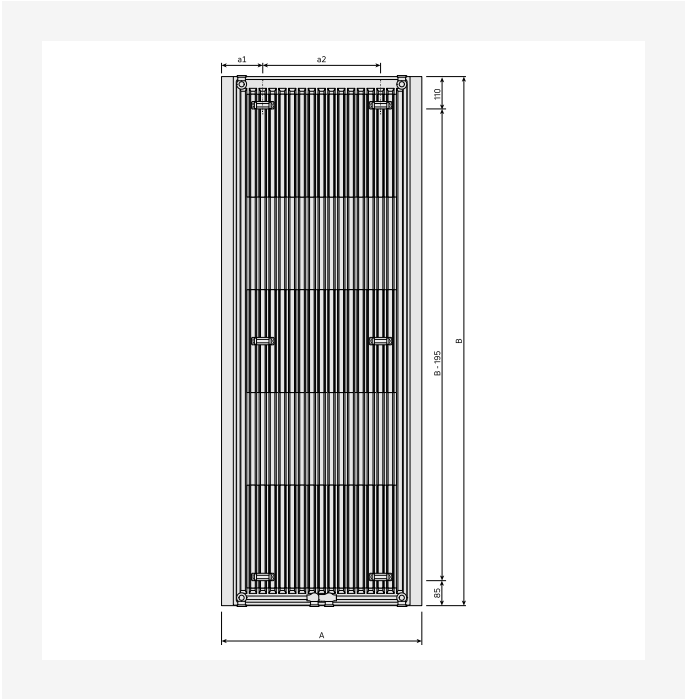


DimensionalDrawing - Paros V, tüüp 11, tagantvaade




Ressursid




DimensionalDrawing - Paros V, tüüp 21, pealtvaade



DimensionalDrawing - Paros V, tüüp 11, pealtvaade

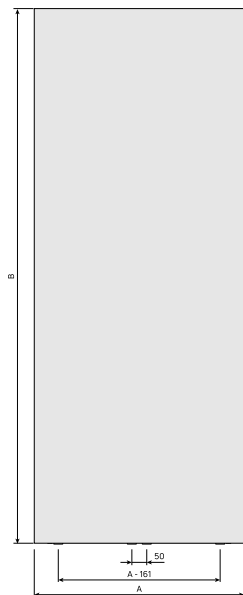

DimensionalDrawing - Paros V, tüüp 21, eestvaade

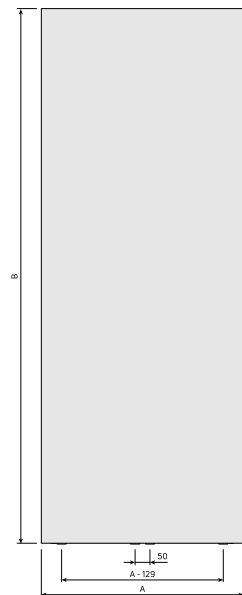

DimensionalDrawing - Paros V, tüüp 11, eestvaade



Technical drawing of a door profile (Fig. 10). The drawing shows a cross-section of the profile with various dimensions and components labeled.

Dimensions (mm):

- 112 (Total width)
- 15 (Width of the top flange)
- 97 (Width of the main body)
- 116 (Height of the top flange)
- 116 (Height of the main body)
- 100 (Height of the bottom flange)
- 80 (Height of the bottom flange)
- 70 (Width of the bottom flange)
- B (Total height)
- B - 194 (Height of the main body)

Components and Features:

- Top flange (hatched area)
- Main body (hatched area)
- Bottom flange (hatched area)
- Internal components (hatched area)
- Seal (hatched area)
- Locking mechanism (hatched area)

Technical drawing of a door profile (likely a door frame or threshold) showing dimensions and material specifications.

Dimensions:

- Overall width: 65
- Top flange width: 81
- Top flange thickness: 16
- Bottom flange width: 114
- Bottom flange thickness: 16
- Bottom flange height: 49
- Bottom flange width: 83
- Bottom flange height: 100
- Bottom flange width: 100
- Bottom flange height: 100
- Bottom flange width: 100
- Bottom flange height: 100

Material Specifications:

- Top flange: B = 194
- Bottom flange: B = 194


The diagram illustrates the four steps of a 180-degree rotation using a rectangular object. The object is shown in four positions, each with a red arrow indicating a downward force and a blue arrow indicating an upward force. A curved arrow labeled 180° indicates the direction of rotation.

- Step 1:** The object is in its initial position. The red arrow is at the bottom center, and the blue arrow is at the top center.
- Step 2:** The object is rotated 90 degrees clockwise. The red arrow is now at the top center, and the blue arrow is at the bottom center.
- Step 3:** The object is rotated 180 degrees clockwise. The red arrow is at the bottom center, and the blue arrow is at the top center.
- Step 4:** The object is rotated 270 degrees clockwise. The red arrow is at the top center, and the blue arrow is at the bottom center.

Technical drawing of a door cross-section. The drawing shows a door with a handle and a lock mechanism. Dimensions are indicated in millimeters (mm). The total height of the door is 2050 mm. The handle is located at a height of 1050 mm from the bottom. The lock mechanism is located at a height of 1050 mm from the bottom. The door is shown in a closed position, with the handle and lock mechanism visible on the right side. The drawing includes a hatched area representing the door's internal structure and a hatched area representing the door's frame. The drawing is labeled with 'D. 1214' and 'D. 1214'.

8 / 14 | Andmeleht | Paros V | 2026-10-08






DimensionalDrawing - Paros V, tüüp 21, pealtvaade




DimensionalDrawing - Paros V, tüüp 11, pealtvaade




Ressursid

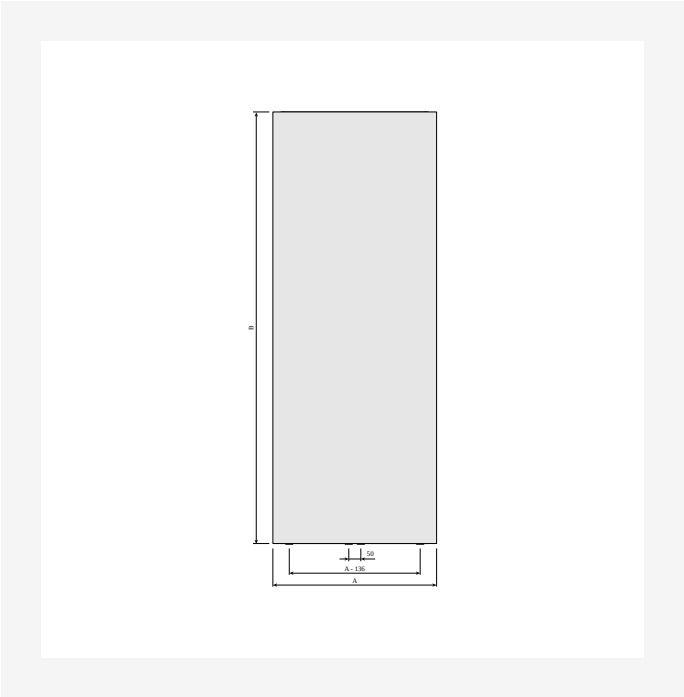

DimensionalDrawing - Paros V, tüüp 11, eestvaade

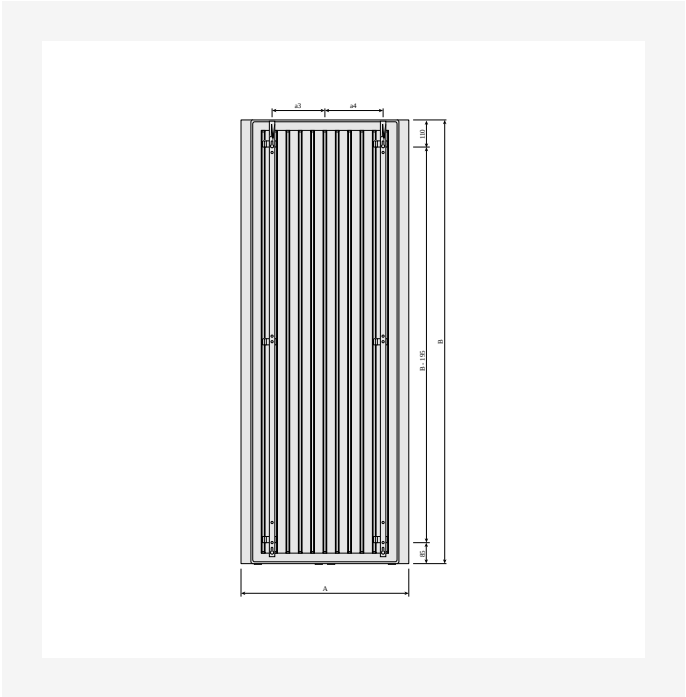

DimensionalDrawing - Paros V, tagantvaade MCW V kinnitustega

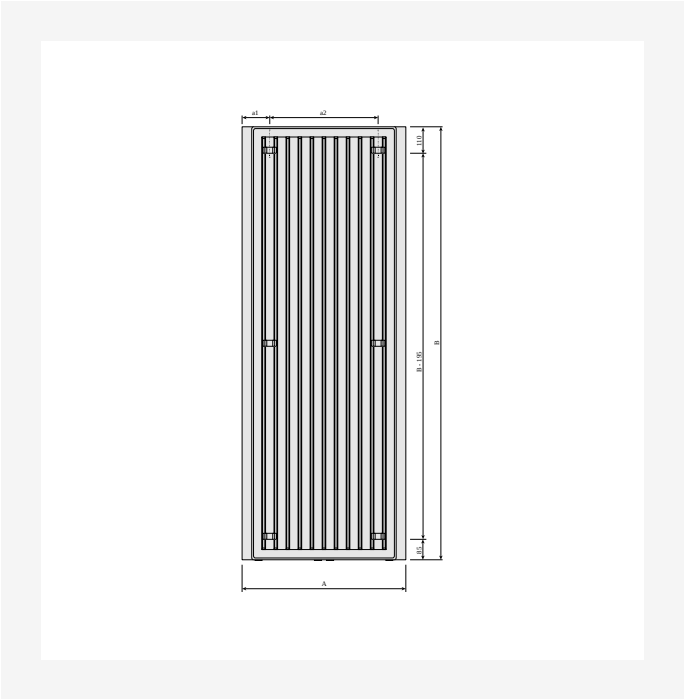

DimensionalDrawing - Paros V, tagantvaade



Seotud tooted



Rätikuhoidja Paros V /
Sanbe



Õhutusvõti



Parandussvärvi spreid



1800

KÕRGUS 1800 mm	PIKKUS	SÜGAVUS		Võimsus (W) 45/35/20°C	Võimsus (W) 55/45/20°C	Võimsus (W) 60/45/20°C	MAHT (l)	N- ekponent	KAAL (kg)
Tüüp 11									
	373	65	FMZ1118003010300	365	378	--	2.6	1.26	21.0
	523	65	FMZ1118004510300	524	546	--	3.8	1.26	29.6
	673	65	FMZ1118006010300	678	709	--	4.9	1.27	38.1
Tüüp 21									
	405	97	FMZ2118003010300	449	495	--	4.8	1.29	32.3
	555	97	FMZ2118004510300	637	716	--	7.2	1.30	47.7
	705	97	FMZ2118006010300	810	930	--	9.7	1.31	63.1



1950

KÕRGUS 1950 mm	PIKKUS	SÜGAVUS		Võimsus (W) 45/35/20°C	Võimsus (W) 55/45/20°C	Võimsus (W) 60/45/20°C	MAHT (l)	N- ekponent	KAAL (kg)
Tüüp 11									
	373	65	FMZ1119503010300	393	403	--	2.9	1.26	22.5
	523	65	FMZ1119504510300	560	582	--	4.1	1.26	31.6
	673	65	FMZ1119506010300	717	755	--	5.4	1.27	40.8
	823	65	FMZ1119507510300	865	923	--	6.7	1.27	49.9
Tüüp 21									
	405	97	FMZ2119503010300	470	521	--	5.2	1.29	34.8
	555	97	FMZ2119504510300	674	756	--	7.8	1.30	51.3
	705	97	FMZ2119506010300	868	985	--	10.4	1.30	67.9
	855	97	FMZ2119507510300	1051	1207	--	13.0	1.31	84.4



2100

KÕRGUS 2100 mm	PIKKUS	SÜGAVUS		Võimsus (W) 45/35/20°C	Võimsus (W) 55/45/20°C	Võimsus (W) 60/45/20°C	MAHT (l)	N- ekponent	KAAL (kg)
Tüüp 11									
	673	65	FMZ1121006010300	761	803	--	5.8	1.26	43.6
	823	65	FMZ1121007510300	908	980	--	7.3	1.27	53.4
Tüüp 21									
	705	97	FMZ2121006010300	926	1038	--	11.1	1.30	72.7
	855	97	FMZ2121007510300	1135	1276	--	13.9	1.30	90.4