



## Data sheet

2026-08-02

# Paros V

Perfect for tight spaces



- ✓ **Compact panel radiator**
- ✓ **Perfect solution for limited wall space**
- ✓ **Practical towel rail optionally available**
- ✓ **Middle connection radiator**
- ✓ **Rotatable for connection from above**

Vertical is a traditional-style panel radiator but configured vertically in order to optimise the use of the available wall space. It is narrow and discrete and provides a very high heating effect compared to the minimum wall space it occupies. For increased functionality in the bathroom and kitchen, a practical towel bar is available as an accessory. The standard colour is RAL 9016 white, but many other colours and finishes are available on request. Complete with brackets, including set of screws and dowels, with blanking plugs and air-vent.



### Area of application

Contemporary alternative to horizontal radiators, manufactured using steel. Factory-fitted with a sleek flat steel plate, side panels and top grille. Various sizes available and the perfect solution for applications where wall space is limited. 2 pipe pumped indirect domestic and commercial heating applications. 6 x 1/2" BSP Connections.

### Sizing

Use a Heat Demand Calculator to determine which heat output is required from the large range of Vertical

radiators.

### Usage

Air vent and plug packs are included in the packaging. Thermostatic Radiator Valves can be installed to control room temperature.

### AMA Text

Vertical panel radiator with centre connection types 10, 20, 21 and 22 with wall brackets system included.



# Specifications

| PROPERTIES                                            | UNIT | VALUES          |
|-------------------------------------------------------|------|-----------------|
| ETIM Class                                            |      | EC011022        |
| Material                                              |      | Steel           |
| Type                                                  |      | 11, 21          |
| Surface structure                                     |      | Flat smooth     |
| Max working pressure                                  | bar  | 10              |
| Number of standard connections                        |      | 4               |
| Heat output according to recognized EN 442 laboratory |      | Yes             |
| Max. Operating Temperature                            | °C   | 110             |
| Standard color                                        |      | Yes             |
| Color                                                 |      | White           |
| RAL number                                            |      | 9016            |
| Grill/Cover plate                                     |      | Yes             |
| Grill/Cover plate                                     |      | Yes             |
| Gloss value                                           |      | Glossy          |
| Thread dimension (inch)                               |      | 1/2 inch        |
| Thread connection                                     |      | Internal thread |
| With single-point connection                          |      | Yes             |
| With air vent connection                              |      | Yes             |
| With air valve/vent                                   |      | Yes             |
| With drain option                                     |      | Yes             |



# Documents


| DOCUMENTS                                | DOCUMENT TYPE | LINK                                                                                                                                                                                                                |
|------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Colour options                           | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_559d73e5-f4c7-4bc1-a5d1-5d81098413e7">https://asset.productmarketingcloud.com/api/assetstorage/3577_559d73e5-f4c7-4bc1-a5d1-5d81098413e7</a> |
| Myson Complete Solutions - Full Brochure | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b">https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b</a> |
| Myson Premium Panel & Designer Radiators | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fabcd51e3-4ceb-9b37-139ffed451d7">https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fabcd51e3-4ceb-9b37-139ffed451d7</a> |
| Range brochure                           | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_5a942de7-8bcb-4179-a4fc-d890b5c692f3">https://asset.productmarketingcloud.com/api/assetstorage/3577_5a942de7-8bcb-4179-a4fc-d890b5c692f3</a> |
| Product Warranty                         | Warranty      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab">https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab</a> |
| Installation Manual Faro V               | TechDia       | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_6a68539c-c460-4642-8d8b-056f68b79286">https://asset.productmarketingcloud.com/api/assetstorage/3577_6a68539c-c460-4642-8d8b-056f68b79286</a> |



# Resources



ProductImage - New\_Paros-V main picture

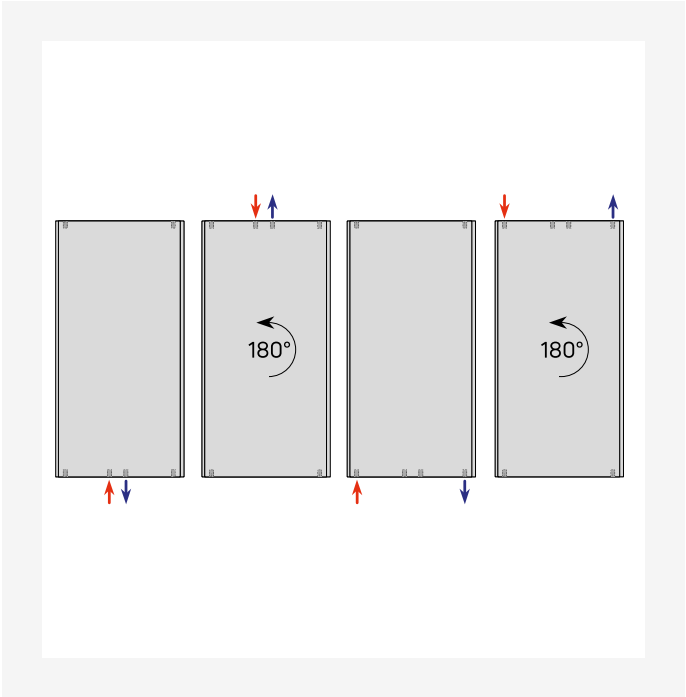

DimensionalDrawing - Verticals connection options



## Related products



Air Vent Key (Spare)



# 1800

| HEIGHT 1800 mm | LENGTH | DEPTH | ITEM NO    | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|------------|--------------------|--------------------|------------|------------|-------------|
| Type 11        |        |       |            |                    |                    |            |            |             |
|                | 373    | 65    | PAR180SC38 | 1290               | 2457               | 2.6        | 1.26       | 21.0        |
|                | 523    | 65    | PAR180SC53 | 1863               | 3555               | 3.8        | 1.26       | 29.6        |
|                | 673    | 65    | PAR180SC68 | 2419               | 4623               | 4.9        | 1.27       | 38.1        |
| Type 21        |        |       |            |                    |                    |            |            |             |
|                | 405    | 97    | PAR180DX40 | 1689               | 3258               | 4.8        | 1.29       | 32.3        |
|                | 555    | 97    | PAR180DX55 | 2443               | 4739               | 7.2        | 1.30       | 47.7        |
|                | 705    | 97    | PAR180DX70 | 3173               | 6183               | 9.7        | 1.31       | 63.1        |



# 1950

| HEIGHT 1950 mm | LENGTH | DEPTH | ITEM NO    | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|------------|--------------------|--------------------|------------|------------|-------------|
| Type 11        |        |       |            |                    |                    |            |            |             |
|                | 373    | 65    | PAR195SC38 | 1375               | 2617               | 2.9        | 1.26       | 22.5        |
|                | 523    | 65    | PAR195SC53 | 1986               | 3787               | 4.1        | 1.26       | 31.6        |
|                | 673    | 65    | PAR195SC68 | 2576               | 4927               | 5.4        | 1.27       | 40.8        |
|                | 823    | 65    | PAR195SC83 | 3149               | 6039               | 6.7        | 1.27       | 49.9        |
| Type 21        |        |       |            |                    |                    |            |            |             |
|                | 405    | 97    | PAR195DX40 | 1778               | 3439               | 5.2        | 1.29       | 34.8        |
|                | 555    | 97    | PAR195DX55 | 2579               | 5002               | 7.8        | 1.30       | 51.3        |
|                | 705    | 97    | PAR195DX70 | 3361               | 6527               | 10.4       | 1.30       | 67.9        |
|                | 855    | 97    | PAR195DX85 | 4118               | 8022               | 13.0       | 1.31       | 84.4        |



# 2100

| HEIGHT 2100 mm | LENGTH | DEPTH | ITEM NO    | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|------------|--------------------|--------------------|------------|------------|-------------|
| Type 11        | 673    | 65    | PAR210SC68 | 2740               | 5220               | 5.8        | 1.26       | 43.6        |
|                | 823    | 65    | PAR210SC83 | 3344               | 6401               | 7.3        | 1.27       | 53.4        |
| Type 21        | 705    | 97    | PAR210DX70 | 3542               | 6865               | 11.1       | 1.30       | 72.7        |
|                | 855    | 97    | PAR210DX85 | 4354               | 8438               | 13.9       | 1.30       | 90.4        |