



**Data sheet**  
2026-07-22

# Tinos V

Soft, rounded shape



- ✓ **Modern rounded design**
- ✓ **Perfect solution for limited wall space**
- ✓ **High-quality stainless steel towel rail**
- ✓ **Middle connection radiator**
- ✓ **Rotatable for connection from above**

Paros V is designed to match any decorative style, whether you prefer an intimate, classic style or a cleaner, more modern design. This vertical panel radiator available in RAL 9016 white as standard, but other colours and finishes are available on request. A towel rail in high-quality stainless steel is available as an accessory. The side covers are integrated with a decorative front plate in one elegant rectangular casing affixed to the core radiator body. Complete with brackets including set of screws and dowels with mounting instructions, 3 brass blind plugs and air-vent.



### Area of application

Contemporary alternative to horizontal radiators, manufactured using steel. Factory-fitted with a sleek flat steel front plate, side panels and top grille. Various sizes available. The perfect solution for applications where wall space is limited. 2 pipe pumped indirect domestic and commercial heating applications. 6 x 1/2" BSP Connections.

### Sizing

Use a Heat Demand Calculator to determine which heat output is required from the large range of Paros V vertical radiators.

### Usage

Air vent and plug packs are included in the packaging. Thermostatic Radiator Valves can be installed to control room temperature.

### AMA Text

Designer radiator Paros V is a vertical radiator with a flat front casing integrated with rounded side covers, and designed without joints. Available as type 11, with one heating panel and one layer of convection fins, or as type 21 with two heating panels and one layer of convection fins.



# Specifications

| PROPERTIES                                            | UNIT | VALUES          |
|-------------------------------------------------------|------|-----------------|
| ETIM Class                                            |      | EC011022        |
| Material                                              |      | Steel           |
| Type                                                  |      | 11, 21          |
| Surface structure                                     |      | Flat smooth     |
| Max working pressure                                  | bar  | 10              |
| Number of standard connections                        |      | 6               |
| Heat output according to recognized EN 442 laboratory |      | Yes             |
| Max. Operating Temperature                            | °C   | 110             |
| Standard color                                        |      | Yes             |
| Color                                                 |      | White           |
| RAL number                                            |      | 9016            |
| Grill/Cover plate                                     |      | Yes             |
| Grill/Cover plate                                     |      | Yes             |
| Gloss value                                           |      | Glossy          |
| Thread dimension (inch)                               |      | 1/2 inch        |
| Thread connection                                     |      | Internal thread |
| With single-point connection                          |      | Yes             |
| With air vent connection                              |      | Yes             |
| With air valve/vent                                   |      | Yes             |
| With drain option                                     |      | Yes             |




# Documents


| DOCUMENTS                                | DOCUMENT TYPE | LINK                                                                                                                                                                                                                |
|------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Colour options                           | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_559d73e5-f4c7-4bc1-a5d1-5d81098413e7">https://asset.productmarketingcloud.com/api/assetstorage/3577_559d73e5-f4c7-4bc1-a5d1-5d81098413e7</a> |
| Myson Complete Solutions - Full Brochure | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b">https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b</a> |
| Myson Premium Panel & Designer Radiators | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fab3-51e3-4ceb-9b37-139ffed451d7">https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fab3-51e3-4ceb-9b37-139ffed451d7</a> |
| Range brochure                           | Brochure      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_5a942de7-8bcb-4179-a4fc-d890b5c692f3">https://asset.productmarketingcloud.com/api/assetstorage/3577_5a942de7-8bcb-4179-a4fc-d890b5c692f3</a> |
| Product Warranty                         | Warranty      | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab">https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab</a> |
| Installation Manual Faro V               | TechDia       | <a href="https://asset.productmarketingcloud.com/api/assetstorage/3577_6a68539c-c460-4642-8d8b-056f68b79286">https://asset.productmarketingcloud.com/api/assetstorage/3577_6a68539c-c460-4642-8d8b-056f68b79286</a> |



# Resources

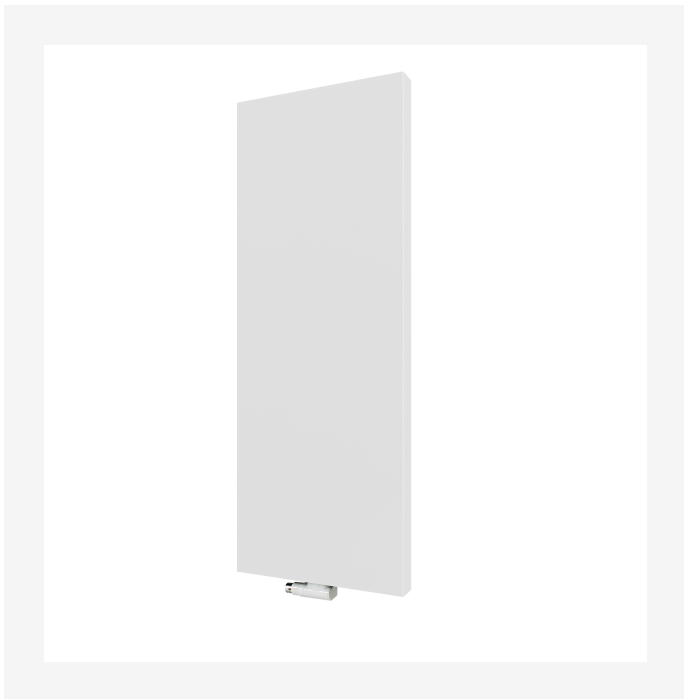

ProductImage - New\_Tinos-V-MAIN product image

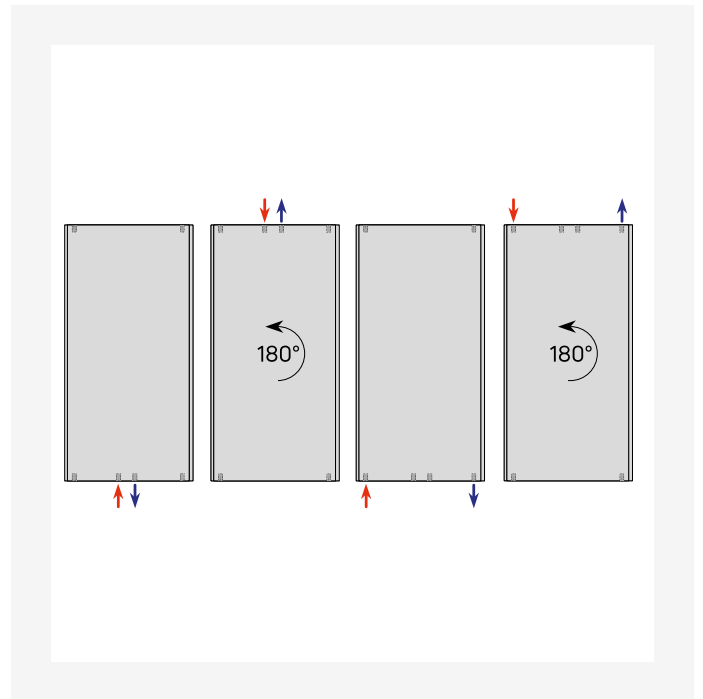

DimensionalDrawing - Verticals connection options



## Related products



Air Vent Key (Spare)



# 1800

| HEIGHT 1800 mm | LENGTH | DEPTH | ITEM NO    | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|------------|--------------------|--------------------|------------|------------|-------------|
| Type 11        |        |       |            |                    |                    |            |            |             |
|                | 325    | 65    | TIN180SC32 | 1290               | 2457               | 2.6        | 1.26       | 21.0        |
|                | 475    | 65    | TIN180SC47 | 1863               | 3555               | 3.8        | 1.26       | 29.6        |
|                | 625    | 65    | TIN180SC62 | 2419               | 4623               | 4.9        | 1.27       | 38.1        |
| Type 21        |        |       |            |                    |                    |            |            |             |
|                | 325    | 97    | TIN180DX32 | 1689               | 3258               | 4.8        | 1.29       | 32.3        |
|                | 475    | 97    | TIN180DX47 | 2443               | 4739               | 7.2        | 1.30       | 47.7        |
|                | 625    | 97    | TIN180DX62 | 3173               | 6183               | 9.7        | 1.31       | 63.1        |



## 1950

| HEIGHT 1950 mm | LENGTH | DEPTH | ITEM NO    | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|------------|--------------------|--------------------|------------|------------|-------------|
| Type 11        |        |       |            |                    |                    |            |            |             |
|                | 325    | 65    | TIN195SC32 | 1375               | 2617               | 2.9        | 1.26       | 22.5        |
|                | 475    | 65    | TIN195SC47 | 1986               | 3787               | 4.1        | 1.26       | 31.6        |
|                | 625    | 65    | TIN195SC62 | 2576               | 4927               | 5.4        | 1.27       | 40.8        |
|                | 775    | 65    | TIN195SC77 | 3149               | 6039               | 6.7        | 1.27       | 49.9        |
| Type 21        |        |       |            |                    |                    |            |            |             |
|                | 325    | 97    | TIN195DX32 | 1778               | 3439               | 5.2        | 1.29       | 34.8        |
|                | 475    | 97    | TIN195DX47 | 2579               | 5002               | 7.8        | 1.30       | 51.3        |
|                | 625    | 97    | TIN195DX62 | 3361               | 6527               | 10.4       | 1.30       | 67.9        |
|                | 775    | 97    | TIN195DX77 | 4118               | 8022               | 13.0       | 1.31       | 84.4        |





# 2100

| HEIGHT 2100 mm | LENGTH | DEPTH | ITEM NO    | (Btu/H) 55/45/20°C | (Btu/H) 75/65/20°C | VOLUME (l) | N-EXPONENT | WEIGHT (kg) |
|----------------|--------|-------|------------|--------------------|--------------------|------------|------------|-------------|
| Type 11        | 625    | 65    | TIN210SC62 | 2740               | 5220               | 5.8        | 1.26       | 43.6        |
|                | 775    | 65    | TIN210SC77 | 3344               | 6401               | 7.3        | 1.27       | 53.4        |
| Type 21        | 625    | 97    | TIN210DX62 | 3542               | 6865               | 11.1       | 1.30       | 72.7        |
|                | 775    | 97    | TIN210DX77 | 4354               | 8438               | 13.9       | 1.30       | 90.4        |