



Data sheet
2026-04-24

Paros V

Perfect for tight spaces



- ✓ **Compact panel radiator**
- ✓ **Perfect solution for limited wall space**
- ✓ **Practical towel rail optionally available**
- ✓ **Middle connection radiator**
- ✓ **Rotatable for connection from above**

Vertical is a traditional-style panel radiator but configured vertically in order to optimise the use of the available wall space. It is narrow and discrete and provides a very high heating effect compared to the minimum wall space it occupies. For increased functionality in the bathroom and kitchen, a practical towel bar is available as an accessory. The standard colour is RAL 9016 white, but many other colours and finishes are available on request. Complete with brackets, including set of screws and dowels, with blanking plugs and air-vent.



Area of application

Contemporary alternative to horizontal radiators, manufactured using steel. Factory-fitted with a sleek flat steel plate, side panels and top grille. Various sizes available and the perfect solution for applications where wall space is limited. 2 pipe pumped indirect domestic and commercial heating applications. 6 x 1/2" BSP Connections.

Sizing

Use a Heat Demand Calculator to determine which heat output is required from the large range of Vertical

radiators.

Usage

Air vent and plug packs are included in the packaging. Thermostatic Radiator Valves can be installed to control room temperature.

AMA Text

Vertical panel radiator with centre connection types 10, 20, 21 and 22 with wall brackets system included.



Specifications

PROPERTIES	UNIT	VALUES
ETIM Class		EC011022
Material		Steel
Type		11, 21
Surface structure		Flat smooth
Max working pressure	bar	10
Number of standard connections		4
Heat output according to recognized EN 442 laboratory		Yes
Max. Operating Temperature	°C	110
Standard color		Yes
Color		White
RAL number		9016
Grill/Cover plate		Yes
Grill/Cover plate		Yes
Gloss value		Glossy
Thread dimension (inch)		1/2 inch
Thread connection		Internal thread
With single-point connection		Yes
With air vent connection		Yes
With air valve/vent		Yes
With drain option		Yes




Documents


DOCUMENTS	DOCUMENT TYPE	LINK
Colour options	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_559d73e5-f4c7-4bc1-a5d1-5d81098413e7
Myson Complete Solutions - Full Brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_8031f314-369f-4cf3-af0a-a9fc03976b1b
Myson Premium Panel & Designer Radiators	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_7699fab3-51e3-4ceb-9b37-139ffed451d7
Range brochure	Brochure	https://asset.productmarketingcloud.com/api/assetstorage/3577_5a942de7-8bcb-4179-a4fc-d890b5c692f3
Product Warranty	Warranty	https://asset.productmarketingcloud.com/api/assetstorage/3577_ee6ba5d6-3073-4ac1-8de0-f0c719a2c4ab
Installation Manual Faro V	TechDia	https://asset.productmarketingcloud.com/api/assetstorage/3577_6a68539c-c460-4642-8d8b-056f68b79286



Resources

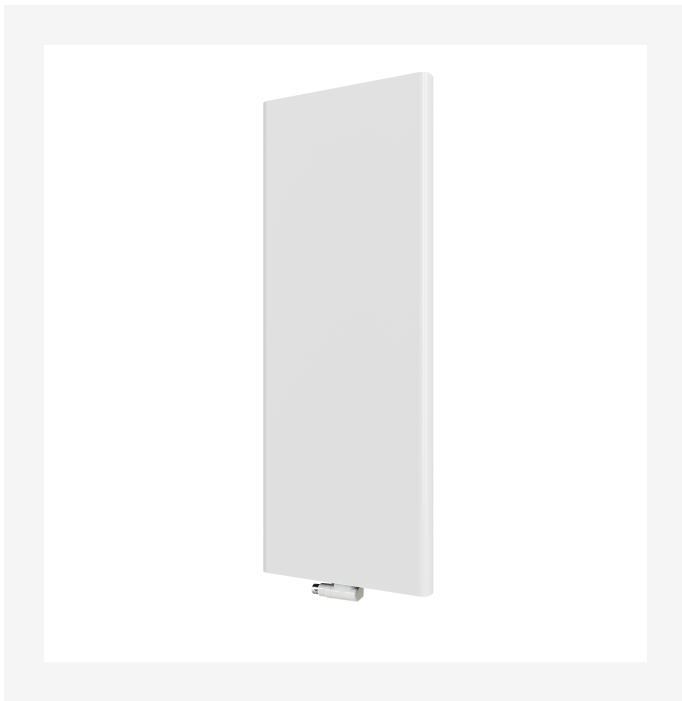

ProductImage - New_Paros-V main picture

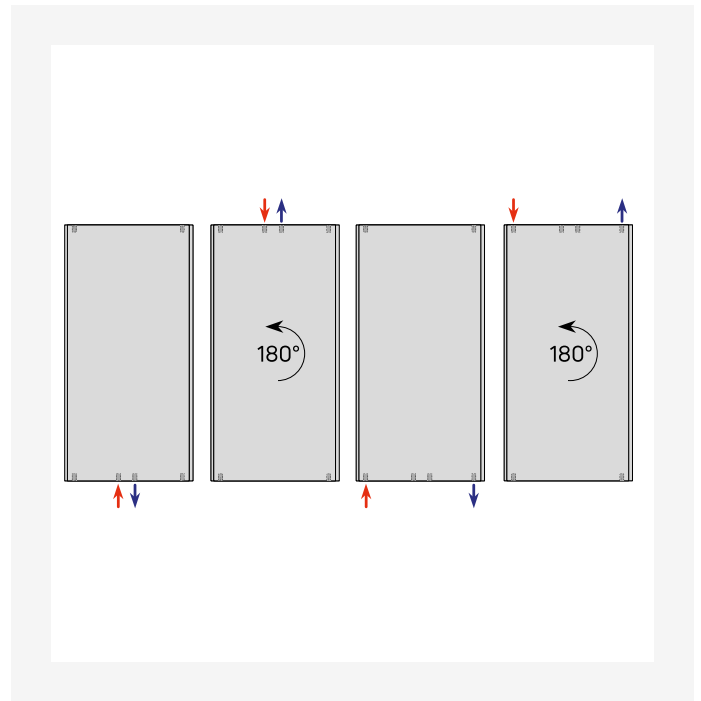

DimensionalDrawing - Verticals connection options



Related products





1800

HEIGHT 1800 mm	LENGTH	DEPTH	ITEM NO	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N-EXPONENT	WEIGHT (kg)
Type 11								
	373	65	PAR180SC38	1290	2457	2.6	1.26	21.0
	523	65	PAR180SC53	1863	3555	3.8	1.26	29.6
	673	65	PAR180SC68	2419	4623	4.9	1.27	38.1
Type 21								
	405	97	PAR180DX40	1689	3258	4.8	1.29	32.3
	555	97	PAR180DX55	2443	4739	7.2	1.30	47.7
	705	97	PAR180DX70	3173	6183	9.7	1.31	63.1



1950

HEIGHT 1950 mm	LENGTH	DEPTH	ITEM NO	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N-EXPONENT	WEIGHT (kg)
Type 11								
	373	65	PAR195SC38	1375	2617	2.9	1.26	22.5
	523	65	PAR195SC53	1986	3787	4.1	1.26	31.6
	673	65	PAR195SC68	2576	4927	5.4	1.27	40.8
	823	65	PAR195SC83	3149	6039	6.7	1.27	49.9
Type 21								
	405	97	PAR195DX40	1778	3439	5.2	1.29	34.8
	555	97	PAR195DX55	2579	5002	7.8	1.30	51.3
	705	97	PAR195DX70	3361	6527	10.4	1.30	67.9
	855	97	PAR195DX85	4118	8022	13.0	1.31	84.4



2100

HEIGHT 2100 mm	LENGTH	DEPTH	ITEM NO	(Btu/H) 55/45/20°C	(Btu/H) 75/65/20°C	VOLUME (l)	N-EXPONENT	WEIGHT (kg)
Type 11								
	673	65	PAR210SC68	2740	5220	5.8	1.26	43.6
	823	65	PAR210SC83	3344	6401	7.3	1.27	53.4
Type 21								
	705	97	PAR210DX70	3542	6865	11.1	1.30	72.7
	855	97	PAR210DX85	4354	8438	13.9	1.30	90.4